



US007509319B2

(12) **United States Patent**
Betros et al.

(10) **Patent No.:** **US 7,509,319 B2**
(45) **Date of Patent:** **Mar. 24, 2009**

(54) **PROVIDING AUTHORIZED ACCESS AND REQUEST-INITIATED TRANSLATION OF DATA FILES**

(75) Inventors: **Kim Betros**, Red Hook, NY (US); **Ghassan Chidiac**, Poughkeepsie, NY (US); **Sanjay Gupta**, Beacon, NY (US); **Jeff Nordyke**, Austin, TX (US); **Giancarlo Palleschi**, Highland, NY (US); **Matthew Rosenthal**, Hurley, NY (US); **Evan E. Roubiecek**, Tucson, AZ (US); **Arnold O. Vimba**, Ridgewood, NJ (US); **Michael P. Zarnick**, Fishkill, NY (US)

(73) Assignee: **International Business Machines Corporation**, Armonk, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 316 days.

(21) Appl. No.: **11/128,679**

(22) Filed: **May 13, 2005**

(65) **Prior Publication Data**

US 2005/0273455 A1 Dec. 8, 2005

Related U.S. Application Data

(62) Division of application No. 09/730,224, filed on Dec. 5, 2000, now Pat. No. 7,062,486.

(51) **Int. Cl.**

G06F 7/00 (2006.01)

G06F 17/30 (2006.01)

(52) **U.S. Cl.** **707/6; 707/9; 707/10**

(58) **Field of Classification Search** **707/6, 707/9, 10; 709/223-226; 726/2-4**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,852,019 A *	7/1989	Vinberg et al.	345/440
6,016,501 A	1/2000	Martin et al.	707/203
6,035,307 A	3/2000	Martin et al.	707/203
6,067,541 A *	5/2000	Raju et al.	707/3
6,151,601 A *	11/2000	Papierniak et al.	707/10

(Continued)

OTHER PUBLICATIONS

Tradanet (R); General Electric Global eXchange Services. [online]; [retrieved on Jan. 26, 2001]; retrieved from the Internet URL: <http://www.gegxs.com/geiscom/template.jsp?page=1&id=11>.

Primary Examiner—Pierre M Vital


Assistant Examiner—Christopher P Nofal

(74) *Attorney, Agent, or Firm*—Cantor Colburn LLP; Derek Jennings

(57) **ABSTRACT**

A method, system and computer program product for controlling access to data files stored in a repository is disclosed. The method includes receiving a request for a data file from a requester. The request specifies a data format preference for receiving the data file. The requested data format is different than either of a data format used to create the data file and a data format in which the data file is stored at the time of the request. The method also includes determining if the requester is authorized to access the requested data file and translating the requested data file from a stored data format into the requested data format responsive to receiving the request if the stored format differs from the requested format. The method further includes making the translated data file accessible to the requester if it is determined that the requester is authorized.

20 Claims, 12 Drawing Sheets

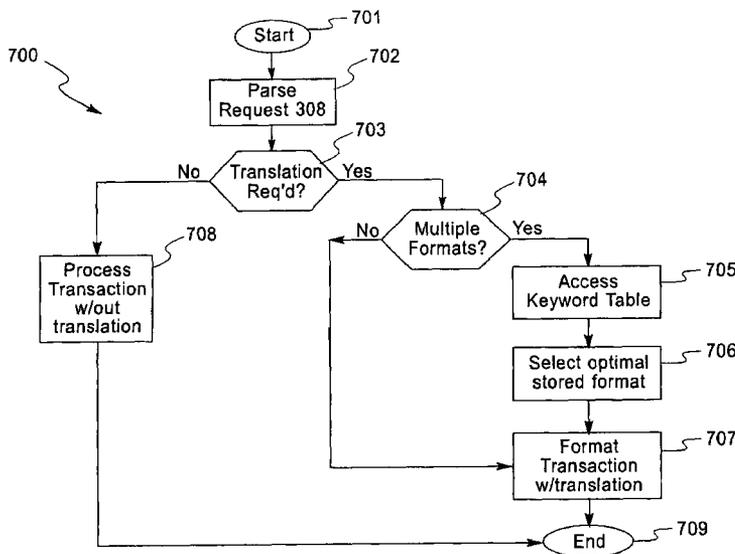

U.S. PATENT DOCUMENTS

6,247,135	B1 *	6/2001	Feague	713/400	6,829,668	B2 *	12/2004	Keskar et al.	710/305
6,289,382	B1 *	9/2001	Bowman-Amuah	709/226	7,062,486	B2 *	6/2006	Betros et al.	707/6
6,321,337	B1 *	11/2001	Reshef et al.	726/14	2002/0069196	A1 *	6/2002	Betros et al.	707/7
6,377,993	B1 *	4/2002	Brandt et al.	709/227	2002/0069227	A1 *	6/2002	Chidiac et al.	707/523
6,381,618	B1 *	4/2002	Jones et al.	707/203	2002/0087603	A1 *	7/2002	Bergman et al.	707/517
6,434,568	B1 *	8/2002	Bowman-Amuah	707/103 R	2004/0148280	A1 *	7/2004	Chimura	707/3
6,453,353	B1 *	9/2002	Win et al.	709/229	2005/0021533	A1 *	1/2005	Ayachitula et al.	707/100
6,584,468	B1 *	6/2003	Gabriel et al.	707/10	2005/0187963	A1 *	8/2005	Markin	707/102

* cited by examiner

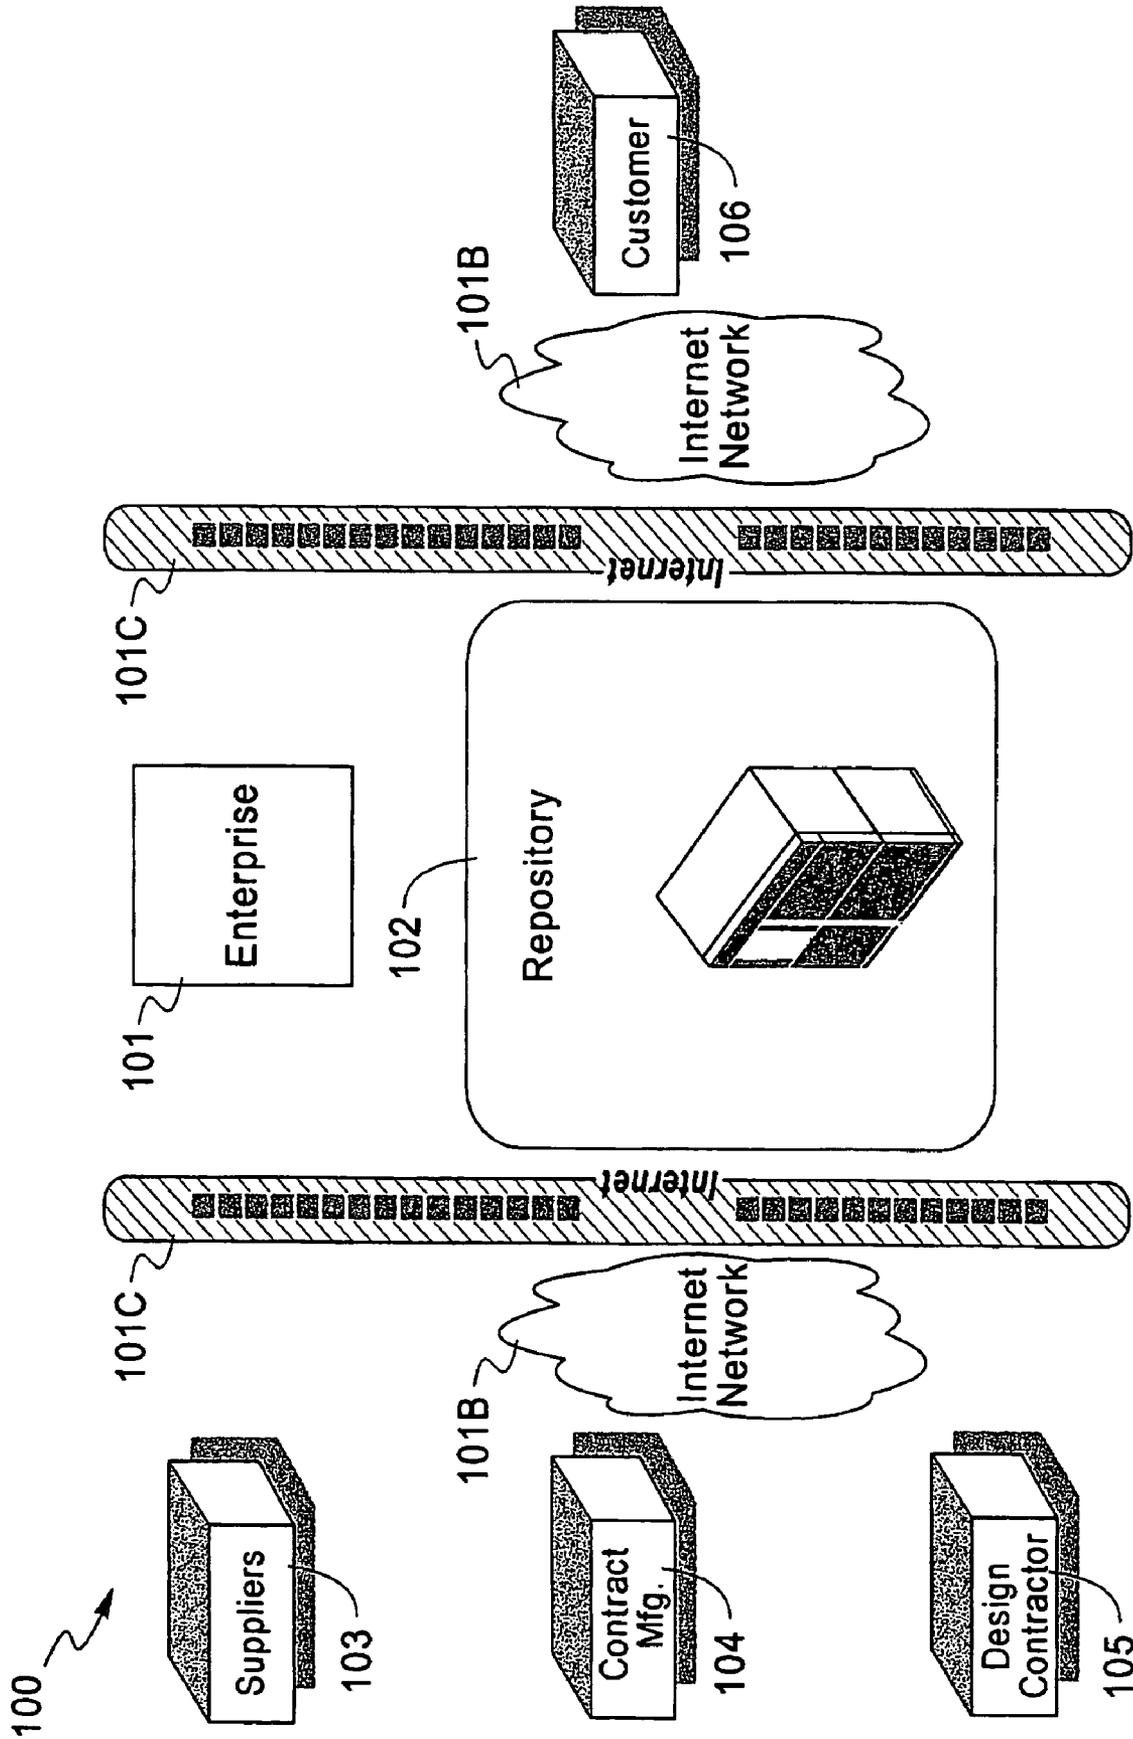


Fig. 1

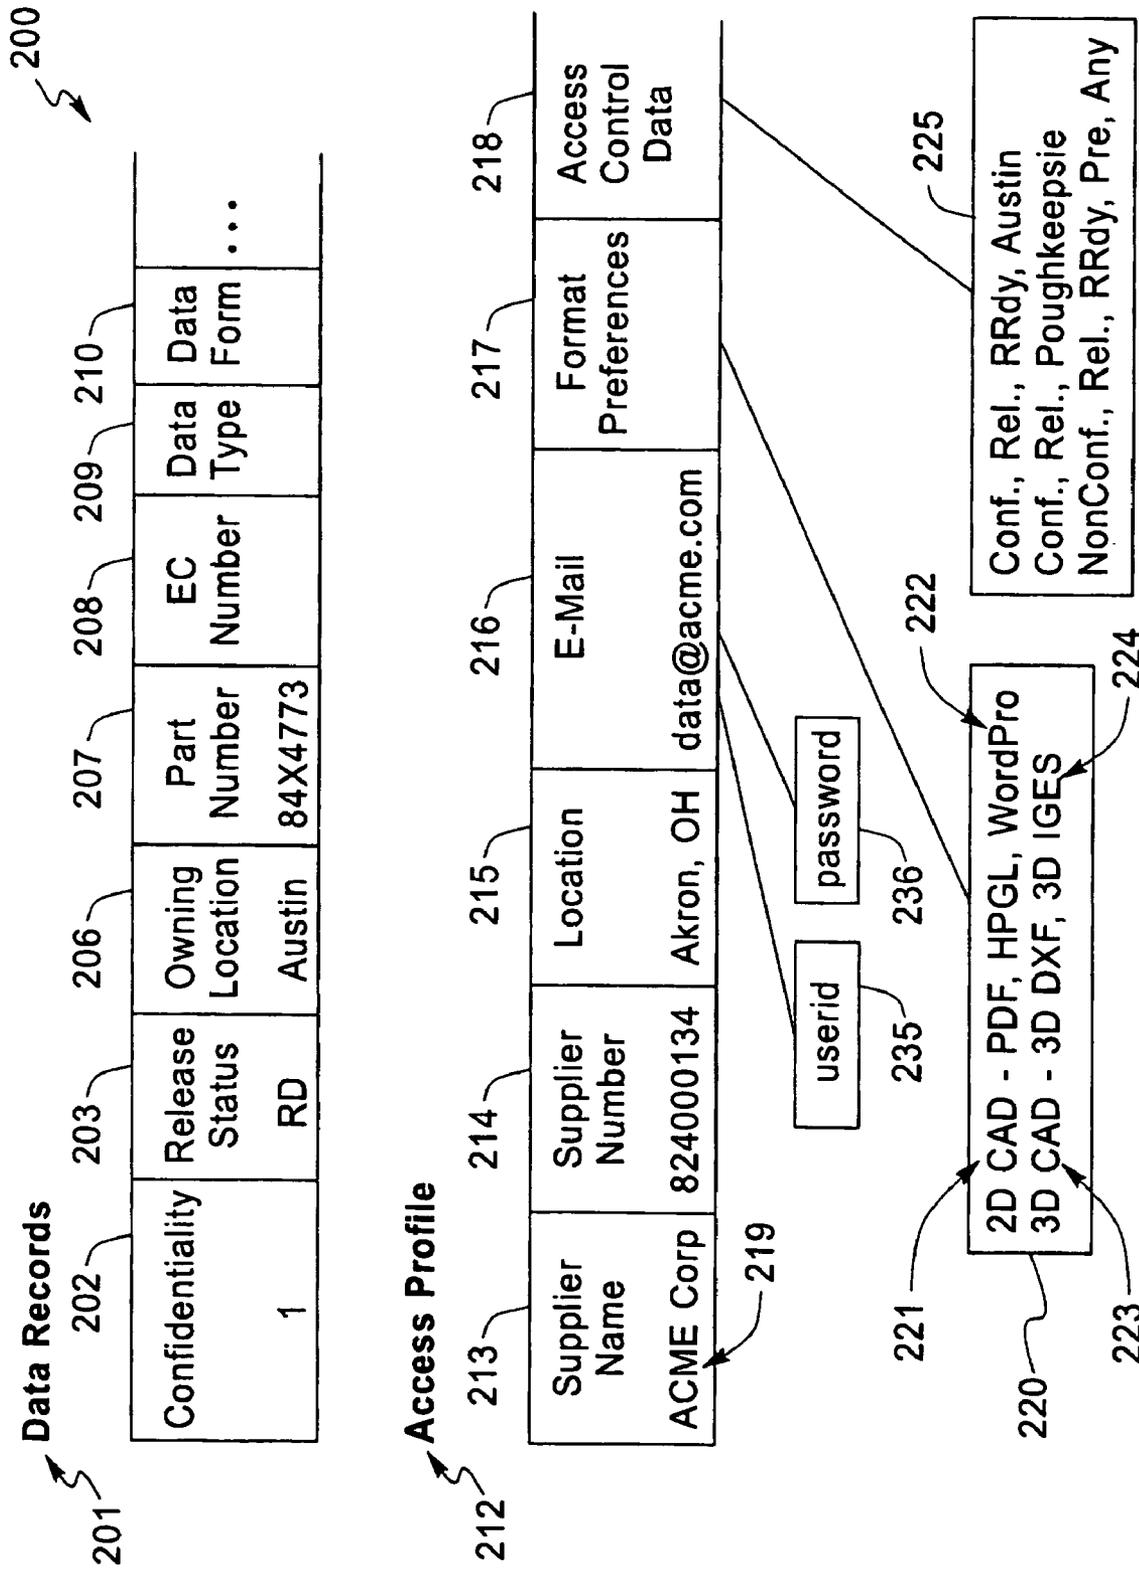


Fig. 2

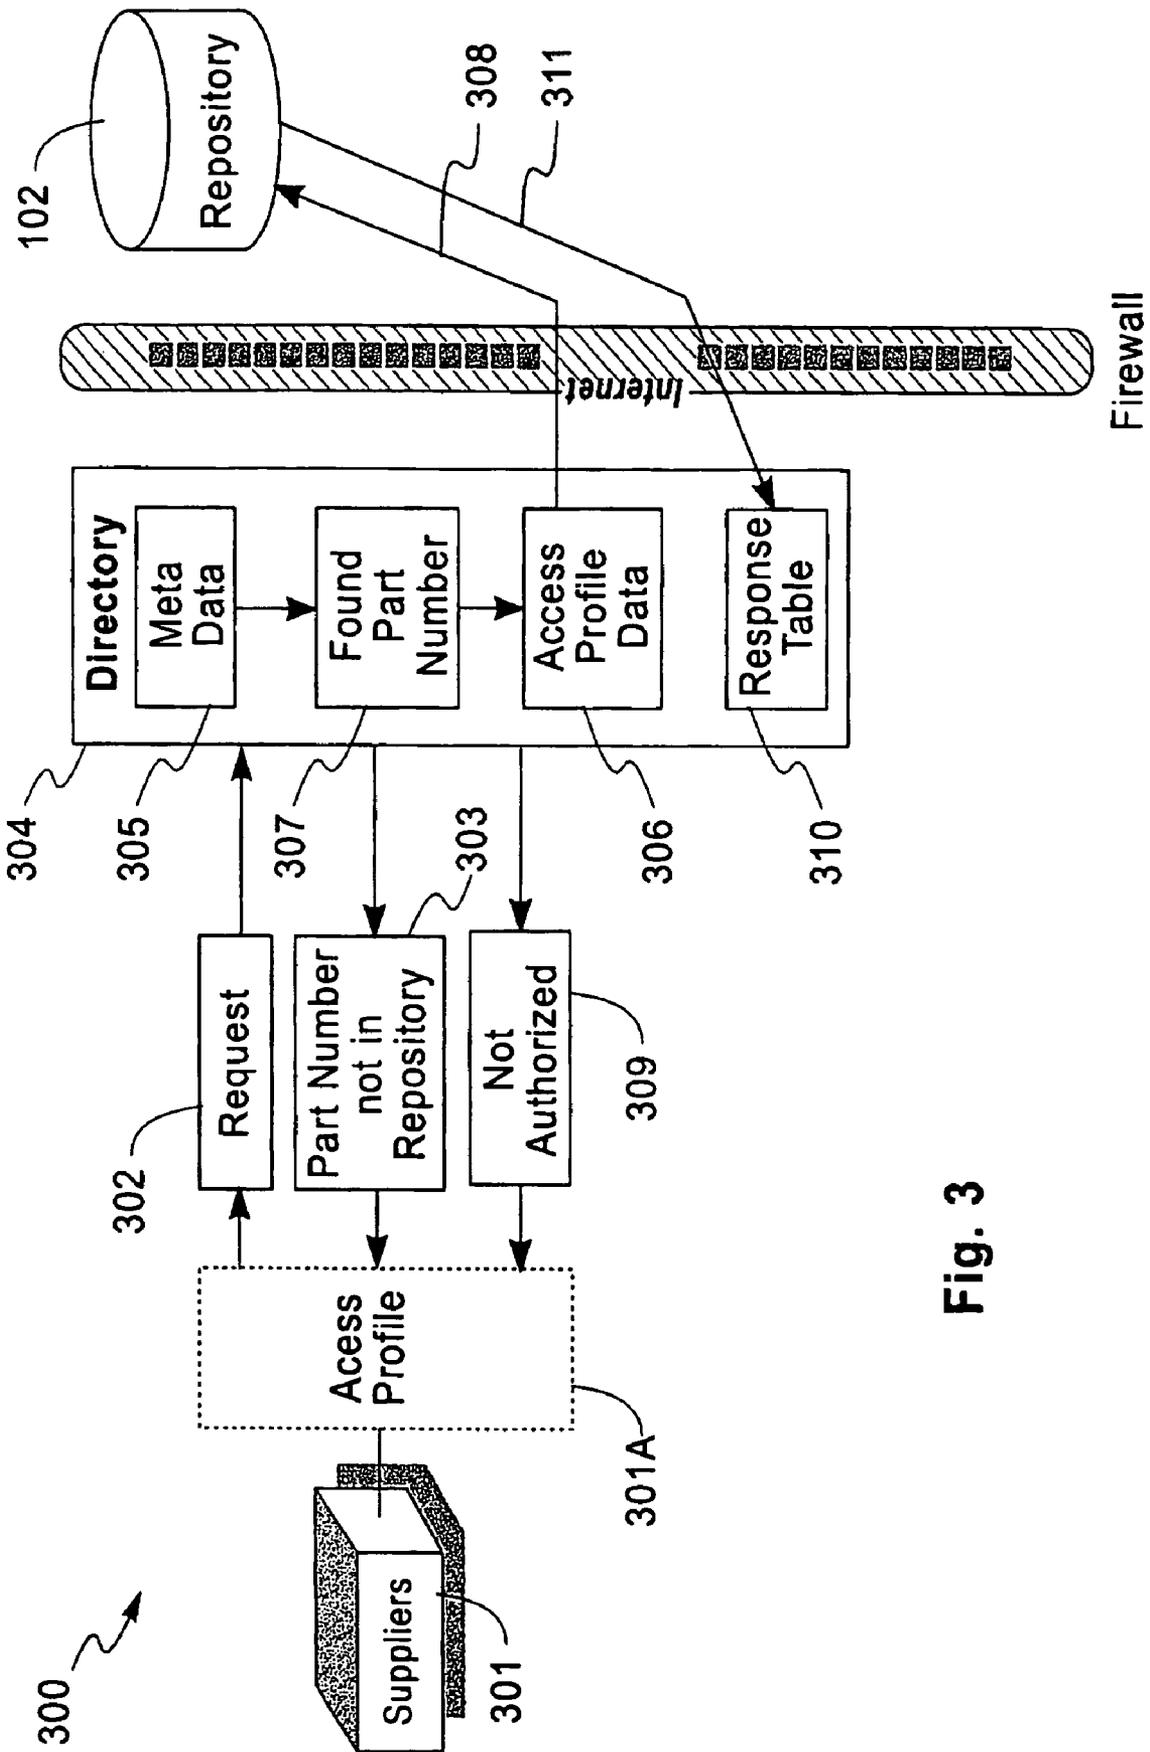
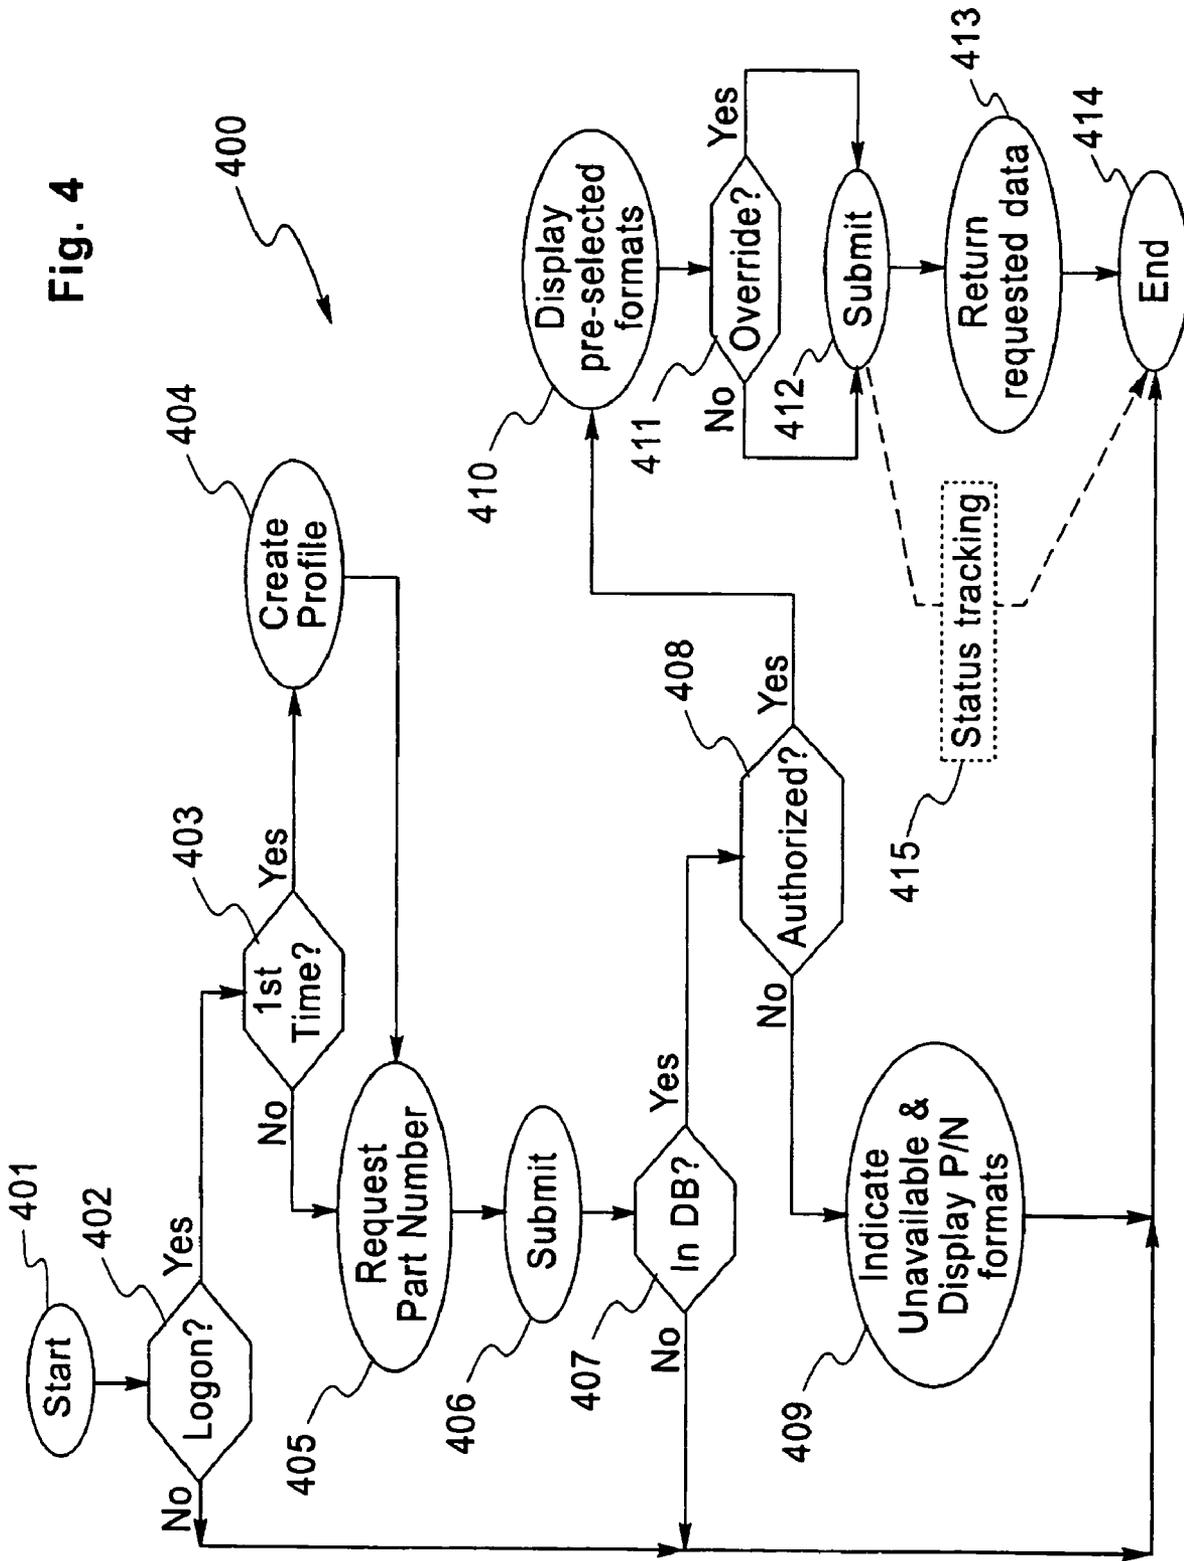


Fig. 3

Fig. 4



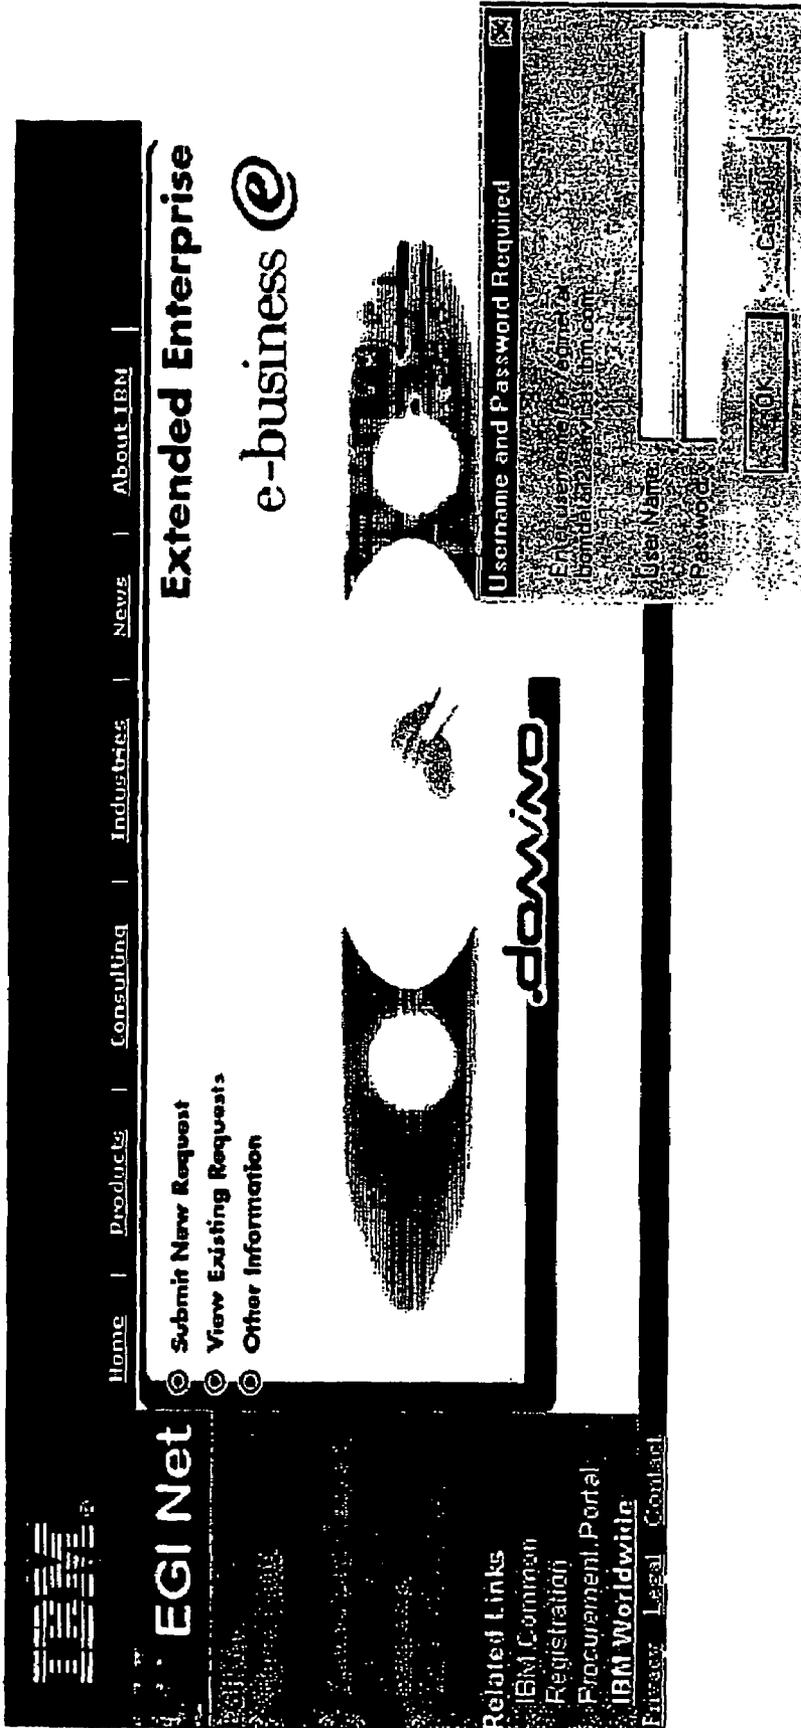


Fig. 5A

<i>User File Format Preferences</i>		
2D Format:	3D Format:	Other Format:
<input type="checkbox"/> 2D CADAM Model <input type="checkbox"/> 2D DXF - Drafting Data <input checked="" type="checkbox"/> 2D HPGL - Drafting Data <input type="checkbox"/> 2D HPGL - Schematic Data <input type="checkbox"/> 2D IGES - Drafting Data <input type="checkbox"/> 2D PDF - Drafting Data <input checked="" type="checkbox"/> 2D TIFF - Drafting Data <input type="checkbox"/> 2D Viewport - Drafting Data <input type="checkbox"/> CATIA Model(CATEXP) <input type="checkbox"/> CoreIDRAW Data <input type="checkbox"/> CoreIDRAW PDF Data <input type="checkbox"/> DDLOGIC Data <input type="checkbox"/> DDPHYSI Data <input type="checkbox"/> ECNOTICE Text <input type="checkbox"/> Gerber Data <input type="checkbox"/> IGES Data <input type="checkbox"/> IMAGE Data (IBM IOCA) <input type="checkbox"/> Lotus WordPro Document <input type="checkbox"/> MIF Data <input type="checkbox"/> NCDRIL Data <input type="checkbox"/> PKZIP (Compressed) Data <input type="checkbox"/> PostScript Data <input type="checkbox"/> TDIBOM Data <input type="checkbox"/> TDITXT Data <input type="checkbox"/> WordPro PDF Data	<input type="checkbox"/> 3D DXF - Wireframe Geometry <input type="checkbox"/> 3D IGES - Surface Geometry <input checked="" type="checkbox"/> 3D IGES- Wireframe Geometry <input type="checkbox"/> 3D Pro/E Part <input type="checkbox"/> 3D STEP - Geometry Data <input type="checkbox"/> CATIA Model (CATEXP) <input type="checkbox"/> IGES Data	<input type="checkbox"/> Nothing

Fig. 5B

Electronic Graphic Interchange Request

Request Number:

IBM Site:

Amsterdam

Submitted By:

Matthew Rosenthal@IBM

IBM Contact Name:

IBM Part Number	Engineering Change #	Formats Available	Status	Release Date	Basic Name
0000037L0319	10000E73488X	<input type="checkbox"/> 2D PDF - Drafting Data <input type="checkbox"/> 2D DXF - Drafting Data <input checked="" type="checkbox"/> 2D HPGL - Drafting Data <input type="checkbox"/> 2D IGES - Drafting Data <input type="checkbox"/> 2D Viewport - Drafting Data <input type="checkbox"/> 3D DXF - Wireframe Geometry <input checked="" type="checkbox"/> 3D IGES - Wireframe Geometry <input type="checkbox"/> 3D Pro/E Part <input type="checkbox"/> 3D STEP - Geometry Data <input type="checkbox"/> CATIA Model(CATEXP) <input type="checkbox"/> 3D IGES - Surface Geometry <input type="checkbox"/> Bill of Materials	RD	2000-06-15	Bracket

Fig. 5C



[Home](#) | [Products](#) | [Consulting](#) | [Industries](#) | [News](#) | [About IDB](#)

View existing requests

Download IBM Part# EC Num File Type Date Sent Date Downloaded Sent By

- ▶ 1: New Requests
- ▶ 2: Work in Progress
- ▶ 3: Ready for Download
- ▶ 4: Download Complete

View existing requests

Download IBM Part# EC Num File Type Date Sent Date Downloaded Sent By

- ▶ 1: New Requests
 - 000003ZL0319 10000E73488X 2D HPGL Drafting Data
- ▶ 2: Work in Progress
 - 000001LDP001 10000SYTST1M 2D DXF - Drafting Data
- ▶ 3: Ready for Download
 - 000001LDP003 10000SYTST2A 2D HPGL -Drafting Data 09/14/2000 02:19:45 PM Eginet Support
 - 000001LDP003 10000SYTST2A 2DIGES - Surface Geometry 09/14/2000 02:20:25 PM Eginet Support
- ▶ 4: Download Complete
 - 000001LDP003 10000SYTST2A 2D DXF - Drafting Data 09/14/2000 02:19:48 PM 09/14/2000 04:14:16 PM Eginet Support

Fig. 5D

Fig. 6


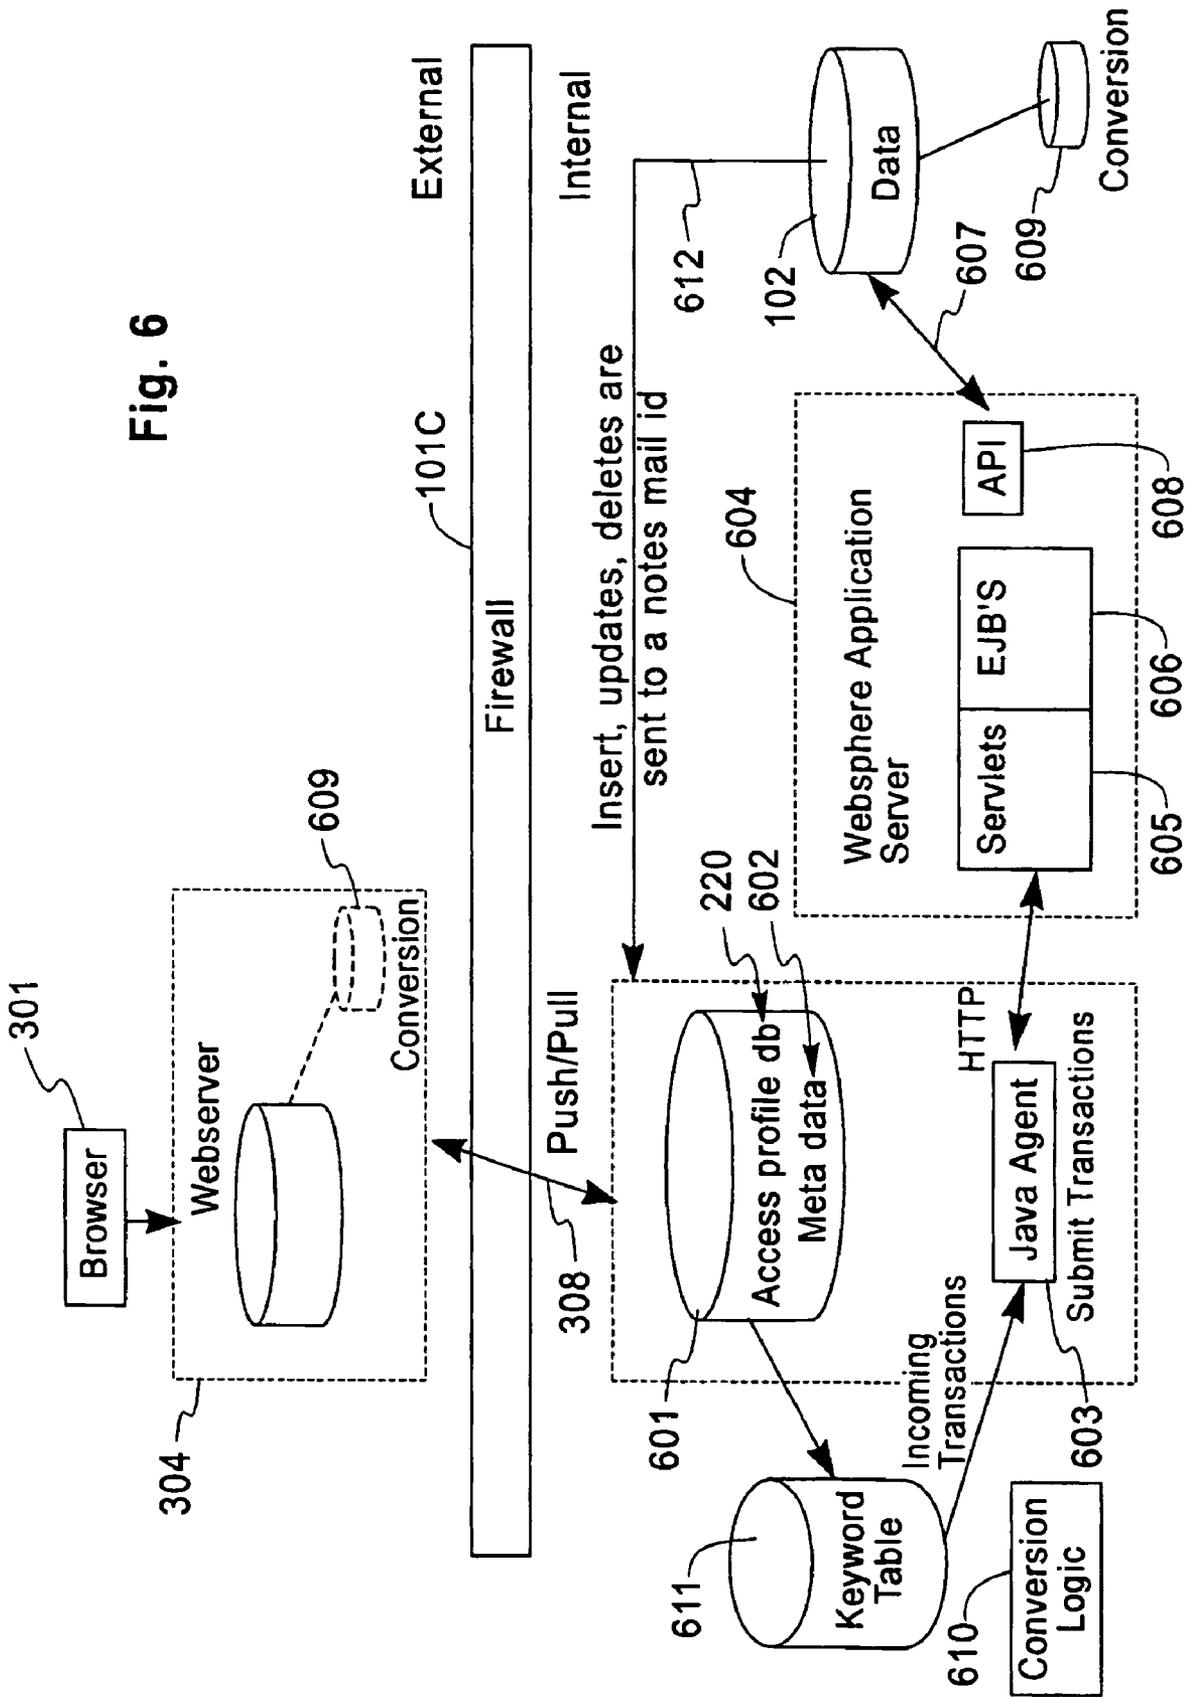


Fig. 7

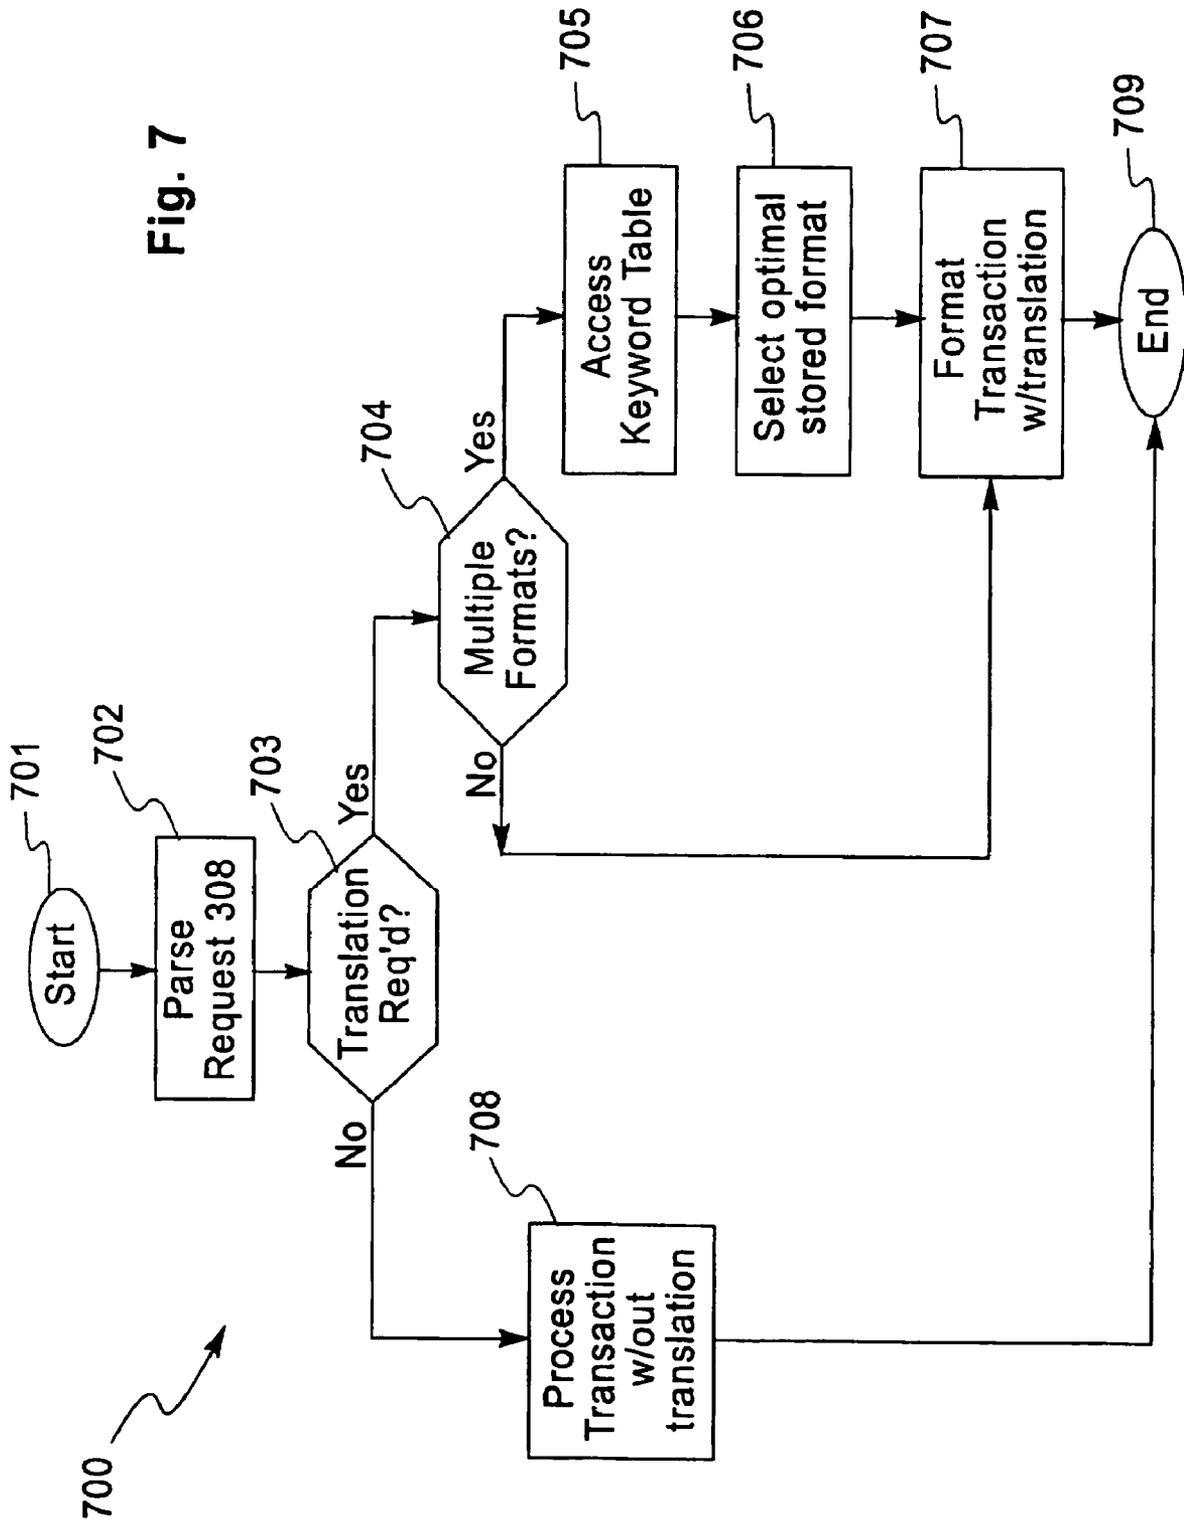

800

Keyword Table

EGINET Map Tables	Precedence	DType	DForm	Format
Keywords				
Supplier Restrictions				
By Location Name				
By Location Number				
By Supplier Number				
SupplierParms				
2D				
By Description				
Lookup				
3D				
By Description				
By Format Precedence				
By Lookup				
Agents				

801	802	Precedence	DType	DForm	Format
2D CADAM Model		1	CADAM	DRAW	2D Format File
2D DXF - Drafting Data		1	CATIA	DRAW	2D Format File
		2	CATIA	MODEL	2D Format File
		3	CATIA	SIMPL	2D Format File
2D HPGL - Drafting Data		1	HPGL	*(all dforms)	2D Format File
		2	CATIAPLT	HPGL	2D Format File
		3	CADAM	DRAW	2D Format File
		4	CATIA	DRAW	2D Format File
		5	CATIA	MODEL	2D Format File
2D HPGL - Schematic Data		1	HPGLSCH	*(all dforms)	2D Format File
2D IGES - Drafting Data		1	IGESE	DRAW	2D Format File
		2	CATIA	DRAW	2D Format File
		3	CATIA	MODEL	2D Format File
		4	CATIA	SIMPL	2D Format File

Fig. 8

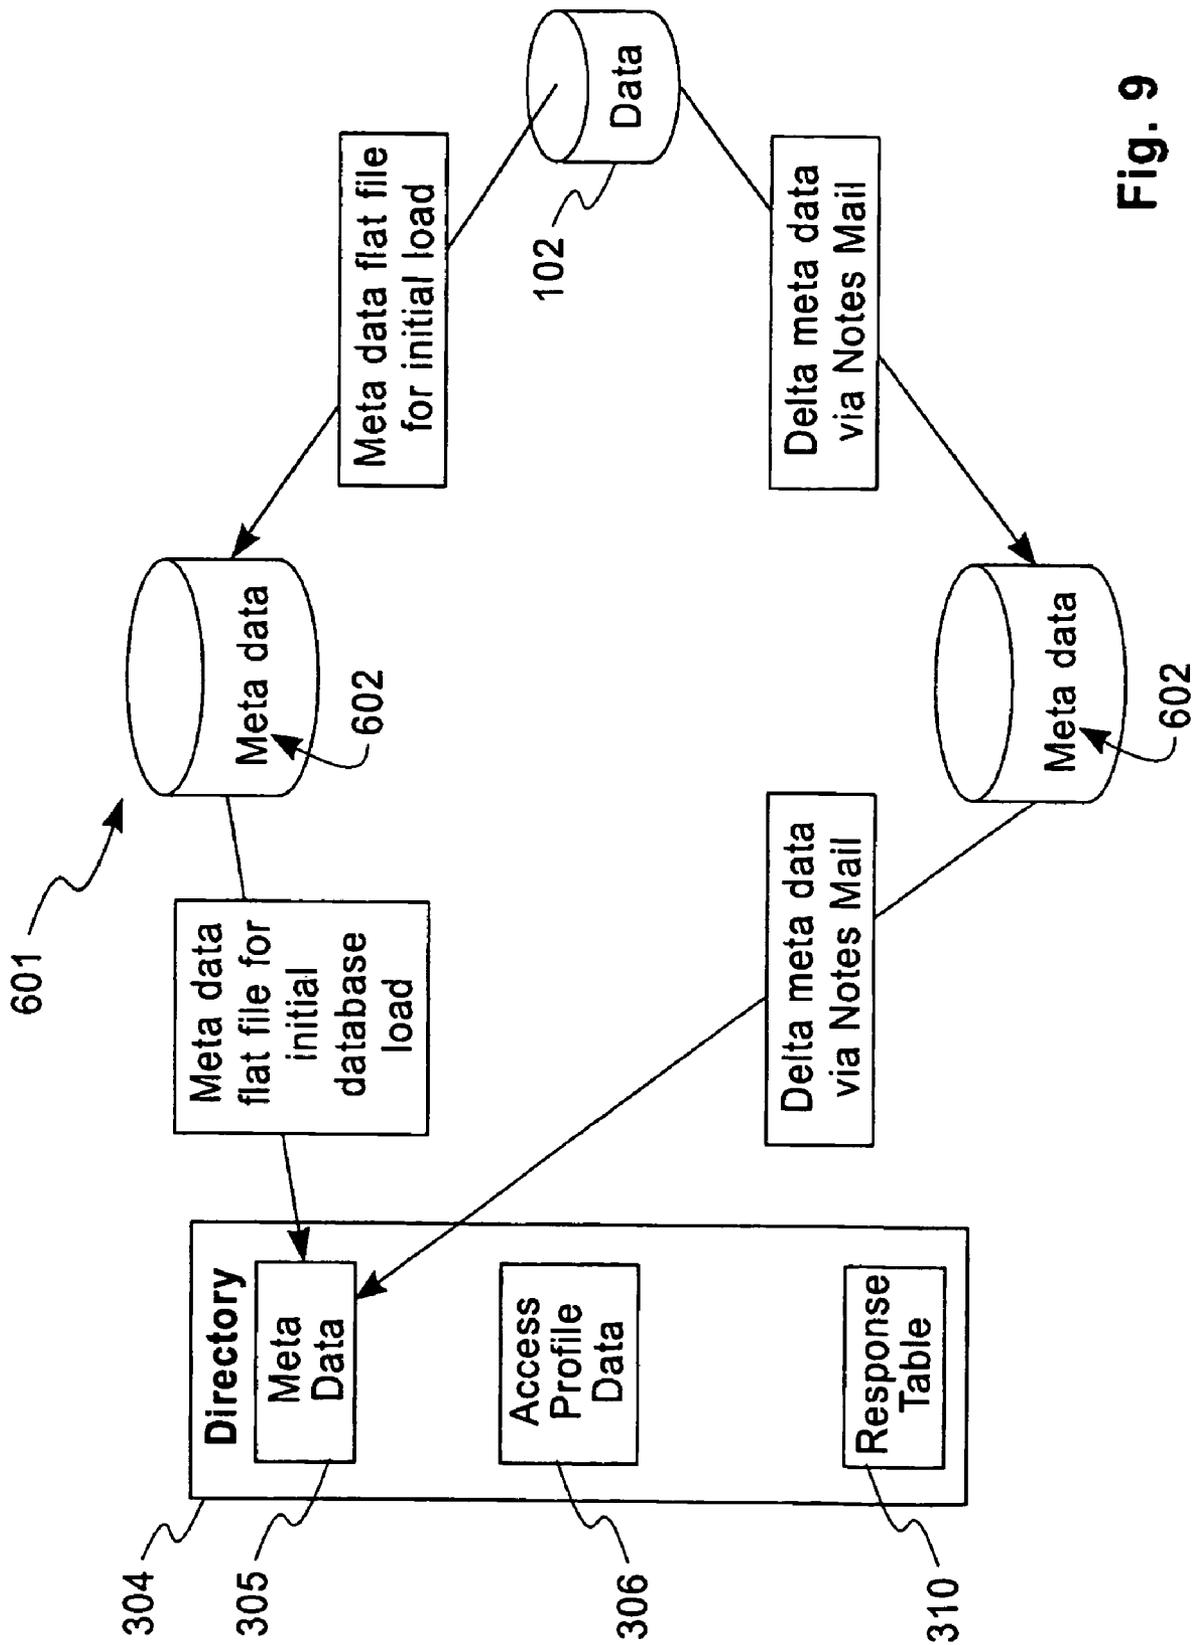


Fig. 9

1

**PROVIDING AUTHORIZED ACCESS AND
REQUEST-INITIATED TRANSLATION OF
DATA FILES**

CROSS REFERENCE TO RELATED
APPLICATIONS

This application is a divisional of U.S. Ser. No. 09/730,224, filed Dec. 5, 2000, now U.S. Pat. No. 7,062,486 the contents of which is incorporated by reference herein in its entirety.

FIELD OF THE INVENTION

The present invention generally relates generally to the field of networked data processing and, more particularly, to the provision of a method, system and program product for enabling network access to a repository of formatted data files. The access is restricted to a set of authorized requesters and among the requesters, access is preferably further restricted based upon the characteristics of the stored data and on its intended use by the requester. A requester may require access to the stored file in a format other than the format(s) in which it is stored. A request-initiated translation is provided to enable such access. The request-initiated translation may further be governed by a rules-based translation service which heuristically determines which of the stored file formats should be used as the basis for a translation to a requested file format.

BACKGROUND OF THE INVENTION

The advent of network-based e-commerce has had a dramatic impact on the way in which businesses interact with each other. The fact that business enterprises operating on different computing platforms, can leverage the platform independent power of the Internet to seamlessly interchange data with one another has created a new awareness of the competitive advantages that may be secured by closely integrating the members of a commercial supply chain. A manufacturing entity, for example, can now share real-time data regarding its production operations with its raw material suppliers to enable a more efficient allocation of those raw materials, in turn decreasing inventory costs and ensuring that production by the manufacturer more closely reflects product demand. As a consequence, production cycles run more efficiently and dollar advantages garnered by the supply chain members should markedly increase. However, the mere existence of the Internet as a backbone for supporting the business-to-business interactions of the members of a supply chain is not itself sufficient for the full realization of such marketplace efficiencies.

While the Internet provides a readily available common backbone for inter-enterprise communication, the data processing environments within each enterprise may be markedly dissimilar, thus, merely enabling data flow between enterprises does not address fundamental processing system incompatibilities therebetween. In certain areas this issue is being addressed by adoption of standardized data description paradigms such as those found in the widely adopted extensible Markup Language (XML) which, along with the older Electronic Data Interchange (EDI) has established some standards for inter-enterprise data exchange. While EDI and XML may address many issues regarding inter-enterprise data communication, it is an inevitability that much of the data exchange required for an efficiently functioning supply chain, will involve data which is resident in legacy data processing systems in the various enterprises, and exists in for-

2

mats that are incompatible with the processing systems of the various members of the supply chain. Moreover, it is a certainty that in most cases, these enterprises will not undertake the expensive, time-consuming and risk-laden task of converting their voluminous legacy data into the format of the currently accepted standard. Accordingly, it can be seen that there is a need to provide a seamless data format translation or transcoding scheme to further improve inter-enterprise data exchange.

Since it may often be the case that a requested data file exists within an enterprise in many different formats other than the requested format, a further advantageous aspect of the transcoding scheme would provide logic for selecting the optimal version of a requested data file from which to perform the translation.

A concomitant issue arising from the enhanced ability for inter-enterprise data communications relates to data security. Much of the data that is most important to the efficient operation of an enterprise is the same data for which inter-enterprise communication is necessary to enjoy the aforementioned market efficiencies. Thus, a tension exists between the desire to provide authorized supply chain partners with access to the data that they require to manage their portion of the supply chain, while at the same time ensuring that the data does not become available to unintended recipients such as competitors, customers, and other suppliers.

General Electric Global eXchange Services provides a service called Tradanet (R) (Tradanet is a registered trademark of General Electric Company, USA, headquartered in Gaithersburg, Md.) which offers some of these features. In particular, Tradanet offers the ability for an enterprise to transmit formatted documents via a secure Internet or other network connection to its authorized global trading partners. However the Tradanet service requires that the formats for such documents be pre-established at the enterprise and does not afford a mechanism whereby a partner may request a document in a format other than those pre-established by the enterprise. Hence, in the absence of a translation or transcoding feature, the Tradanet solution fails to address the aforementioned compatibility issues and is, in essence, merely a secure document repository.

In view of the foregoing it can be seen that a solution is needed which addresses these security and compatibility issues so as to enable an enterprise to provide access to any and all data it deems valuable in promoting the efficient operation of its supply chain.

SUMMARY OF THE INVENTION

The foregoing problems and shortcomings of the prior art are overcome and further advantageous features are provided by the present invention wherein a method, an apparatus and a computer program product are provided for controlling access to a set of stored formatted data files and for enabling translation of the stored files from a stored format to another format. The method includes receiving a request for a data file from a requester. The request specifies a data format preference for receiving the data file. The requested data format is different than either of a data format used to create the data file and a data format in which the data file is stored at the time of the request. The method also includes determining if the requester is authorized to access the requested data file and translating the requested data file from a stored data format into the requested data format responsive to receiving the request if the stored format differs from the requested format.

The method further includes making the translated data file accessible to the requester if it is determined that the requester is authorized.

BRIEF DESCRIPTION OF THE DRAWINGS

The subject matter which is regarded as the invention is particularly pointed out and distinctly claimed at the conclusion of the specification. The foregoing and other beneficial features of the invention will be apparent from the following detailed description of a preferred implementation of the invention which is to be read in conjunction with the accompanying drawings wherein:

FIG. 1 depicts a typical manufacturing and design value chain environment wherein the present invention may be implemented;

FIG. 2 illustrates an exemplary format for data storage in the enterprise repository;

FIG. 3 depicts an access control system for restricting access to the data in the repository to authorized suppliers;

FIG. 4 illustrates the process flow undertaken when a supplier submits a request for a data record in the repository through the access control system;

FIG. 5 comprising FIGS. 5a-5d depict screen shots that a supplier would see in interacting with the Web-based front end of the access control system;

FIG. 6 illustrates the structures and processes within the enterprise that enable a response to a supplier's request from the access control system for a data record in the enterprise repository;

FIG. 7 illustrates the process flow undertaken by the conversion logic for determining whether a file format translation is required and, if so, which stored file format should be used as input for the translation;

FIG. 8 depicts an illustrative structure for the keyword table used in conjunction with the conversion logic to enable file format translation;

FIG. 9 illustrates the process for initially loading the meta data into the staging data base and the directory of the access control system as well as providing updates of the meta data thereto.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT OF THE INVENTION

The present invention will be described in terms of an implementation whereby computer-readable graphics files and related product design data which might include text files, spread sheets, and the like, all required for the design and manufacture of computer related equipment are made available to members of a value chain for an enterprise engaged in the manufacturing and design of computer systems. It will, however, be readily apparent to those skilled in the relevant art that this preferred embodiment of the invention is merely illustrative and it is readily contemplated that the unique features of the present invention may be put to myriad uses wherein it is desired to provide access to data in various formats to an authorized population of requesters of that data.

Turning now to the invention in greater detail, reference may be had to FIG. 1 wherein is illustrated a representation of a manufacturing and design infrastructure value chain 100 wherein an embodiment of the present invention may be advantageously implemented. At the center of the infrastructure is an enterprise 101 which, in our example, is engaged in the design and manufacture of computer system. An example of such an enterprise is International Business Machines Corporation, the assignee of the present invention. Within the

enterprise, a repository 102 houses information related to the design and manufacture of the computer systems. In a preferred embodiment, the information might take the form of computer aided design (CAD) models representing two-dimensional (2D) and/or three dimensional (3D) renderings of elements utilized in the manufacture of a computer system, such elements might include, without limitation electronic components, mechanical hardware, enclosures, power supply, heat sinks, the repository may further include software files such as bit patterns representing the electrical configuration of programmable components. Additionally, it is contemplated that associated design and use data embodied in word processing documents, spread sheets and the like may be included as well as the CAD data.

The data repository 102 may be implemented as a centralized database such as a DB2(R) database (DB2 is a registered trademark of International Business Machines Corporation) or any other available database system or file system or simple as a set of flat files stored on server computers within the enterprise. Moreover, the repository may be implemented in a centralized or distributed fashion with elements of the repository residing on a single or on separate computer servers residing in different locations throughout the enterprise.

The enterprise 101 receives raw materials such as components and manufacturing resources as well as design resources, and provides finished products and occasional design data to customers. Accordingly, FIG. 1 further depicts the interaction among the various members of the value chain 100 for the creation, by the enterprise 101 of its computer systems. It is apparent via this depiction, which is a simplification of a typical manufacturing and design value chain, that the members of the chain would desire access to aspects of the data contained in the repository 102, related to their particular participation in the chain. Such access may be enabled by providing a network 101b for supporting the interaction between the enterprise and the other entities comprising the value chain (103-106) which in a preferred embodiment would take the form of an Internet connection or Extranet connection through the firewall 101c of the enterprise 101. FIG. 1 illustratively depicts the interaction between suppliers 103 and the enterprise 101 accessible to the members of the value chain through a Web browser interface. Suppliers, in a preferred embodiment connote those firms responsible for providing the enterprise with building blocks used in the manufacture of its computer systems. Such building blocks might, for example, be in the form of electronic components provided from a component supplier such as Intel Corporation for microprocessors or Amp Corporation for electrical connectors, or alternatively, in the form of mechanical hardware from a supplier such as North American Bolt and Screw Company, Inc. The enterprise 101 may additionally out-source its manufacturing requirements to a set of suppliers engaged in supplying services to the enterprise. Contract manufacturers 104 such as Solectron Corporation are an example. Moreover, the enterprise 101 may out-source details of the system design to an external design contractor 105. In certain instances, it may also be necessary for the enterprise to provide information regarding product design to a customer. Such a necessity may arise if the customer is providing, for example value, added reselling for the systems provided by the enterprise or for any of a variety of other reasons. The data in the repository may be entered by employees of enterprise 101 based upon technical information amassed by those employees alone or in conjunction with members of the value chain 100.

It is also noted that employees of the enterprise may wish to forward data from their personal computers to suppliers out-

side of the enterprise. To do so, these employees may make use of the security and translation facilities associated with the repository which will be subsequently addressed herein. In this manner, and by making use of the subsequently described techniques employed for securely transferring data from within the enterprise to external members of the value chain, information stored locally on an employee's computer may be passed to a supplier without first being stored in the repository, in a manner that ensures proper security and enables the translation of the file into the format desired by the receiving supplier.

From the foregoing explanation of the value chain it is apparent that the data stored in the repository **102**, is central to the efficient functioning of the value chain **100**. Each member of the chain has different access requirements depending on the data that relates to its role in the value chain **100**. To further amplify this point, reference may be had to FIG. **2** wherein is illustrated an exemplary representation of the manufacturing and design data stored in repository **102**. The repository **102** includes data records **201** which may be logically or physically partitioned in accordance with the nature of the components stored therein. For example, an individual data record **201** may include an indication as to whether the record is to be treated as confidential **202**, whether the information in the record is at released status **203** (i.e., in a final unalterable state), in a release ready state (wherein the data is presumed final and awaiting approval for promotion to released state), or a pre-released state wherein it is likely that the data will change. The location within the enterprise controlling the data for the record can also be listed **206**. In our example record **201** is listed as a confidential, release ready data record which is owned the Austin, Tex. branch of enterprise **101**. Each of these levels of classification assist in the creation of an access control system **300** as is subsequently described herein.

Other data that may also be stored regarding the data file **201** include the part number **207** and the engineering change (EC) number **208** of the document (a designation used for tracking the progress of the constituent part number(s) that are the subject of the data file). Additionally, information regarding the data type (DTYPE) **209**, and data format (DFORM) **210** of the record may be stored. The data type **209** of a record indicates the native environment in which the data record was created. For example, a word processing file create in Lotus WORD PRO would have a designation of WORD PRO as its data type, while a CAD document created in CATIA would have a data type of CATIA. The data format field **210** indicates the format in which the data record **201** is currently stored in the repository. Referring to our WORD PRO example, it may be desirable, owing to its universal popularity, to save a copy of the Word Pro file in PDF format, in which case the data format field for the record would indicate PDF. A version of the WORD PRO file which was stored in WORD PRO format would indicate this by listing either WORD PRO or SRC (source) as its data format. CAD drawing, as is known to those skilled in the art, comprises elements which are used to create renderings of increasing complexity. A rudimentary CAD element in a solid modeling system might be a CUBIOD which could be combined with other elements into an ASSEMBLY, which in turn may be stored as a WIRE (faceted) rendering or a SOLID rendering which can be shaded and/or rotated for visualization purposes. A CAD drawing with data type CATIA might then have a data format of WIRE or SOLID, etc. depending upon the stored format of the data record. The foregoing CAD DFORMs are exemplary, other such formats are well known

to those skilled in the art and are contemplated to be included in the data format field as well.

In addition to information specific to stored data records **201**, the enterprise preferably stores information regarding the members of value chain **100** with authority to access the data records in the repository in an access profile database **212**, which may be implemented in the same or different data space than the data records **201**. The access profile database **212** is instrumental in controlling whether requesting suppliers and other members of the value chain **100** will be granted permission to access the repository **102**, and if so, it serves to control which data records **201** within the repository **102** they are authorized to receive and in what format they wish to receive them.

Referring in detail to the access profile database **212**, it can be seen that the database includes a listing of each value chain member that has been granted access to the repository **102**. Access to the repository **102** is enabled through a registration process wherein a supplier **103** or other value chain member applies for and is granted authority to access certain designated data records **201** in the repository **102**. For ease of explanation we shall refer, by way of example, to the designation of access control for a supplier **103** in value chain **100**, however, it is to be understood that any member of the value chain **100** would be handled in a substantially identical manner.

Each supplier is listed in the database **212** by supplier name **213**, as well as by a designated supplier number **214**. The location of the supplier is listed **215** as well as the e-mail address(es) **216** for contacts at the supplier and a userid (s) **235** and password(s) **236** to enable a user to log in to the system. Moreover, a listing of the supplier's data format preferences **217** is maintained in the database **212**. Format preferences may include a variety of information regarding the format(s) in which the supplier **103** wishes to access the data record **201**. Next, access control data is listed **218** which as will be shown, include a level of detail regarding the types of records **201** that may be accessed by the supplier. In a preferred embodiment, the data record attributes for determining access include the confidential status of the record **202**, the release status **203-205** and the location owning the data record **206**.

Entry **219** illustrates the database **212** record for a given supplier Acme Corp., an electronic assembly supplier located in Akron, Ohio **215**. As can be seen the supplier name **213** entry lists Acme Corp., the supplier number **214** is designated as 86.times.1241. The supplier's e-mail address is data@acme.com **216**, and the format preferences **217** are presented in a exploded fashion in box **220**. The suppliers access control data **218** is listed in an exploded fashion in box **221**.

As is seen via an examination of box **220**, Acme has indicated certain data format preferences for certain types of data. That is, upon registering, Acme has provided it's preferred formats in which to receive certain types of information. The data format preference refers to the particular encoding that the data has/will undergo prior to provision to the supplier. This data format preference **220** will be relevant in permitting the enterprise **101** to assess whether a requested record **201** is available in a preferred format and, if not, whether a translation to a preferred format may be undertaken, and, if so, which stored format for the record should be used to best accomplish the translation. These features of the present invention will be subsequently addressed in detail herein. Box **220** illustrates Acme's data format preferences. Here we see that Acme has indicated it's preferences to receive 2D CAD data **221** in PDF format or HPGL format which ever is available as well as

Word Pro format **222** depending upon availability. 3D files **223** are preferred in either 3DD.times.F Wireframe geometry format or 3dIGES surface geometry formats **224**. This is list merely illustrative and it is contemplated that other formats could be included. Moreover, other formatting features may be offered, for example, and as will be detailed subsequently, the supplier may indicate a particular preference associated with a specific request for a data record **201** which conflicts with the supplier's stored preference **220**, the system permits this specifically requested format to override the supplier's stored format preferences **220**, this override might be useful in any number of circumstances, for example when a supplier seeks to access the data in the repository via a mobile networked device such as a cellular telephone or PDA wherein the data format preference of the requesting supplier is likely to be dictated by bandwidth and device display limitations.

As can be seen via an examination of box **225**, Acme, is granted authority to access confidential files which are at released or release-ready status level and which are owned by the Austin, Tex. location of the enterprise **101**, and from the Poughkeepsie, N.Y. location if they are at released status. Further, it can be seen that the supplier has authority to access all non-confidential files in any release status from any location. The functionality of this stored data will be further described below in conjunction with the use of the access control system **300**.

FIG. **3** depicts an access control system **300** for managing access to data in the repository **102** by the members of the value chain **100**. By way of example, FIG. **3** depicts a supplier **301**. As described above, this supplier has an access profile entry **225** in the access profile database **212** associated with it, which is illustrated via the dashed lined drawing as **301a**. This profile is maintained in database **212** and is established upon the supplier's registration to the value chain network **101b**. The entry may be subsequently updated and/or deleted by the enterprise **101** upon request by the supplier **301**. The profile is integrated into the access control system **300** to ensure that the supplier **301** is granted the proper level of authority to access designated data record types in repository **102** and to facilitate data transmission in accordance with the supplier's format preferences.

In a preferred embodiment of the invention an overview of the access control system **300** is as follows: Supplier's **301** access to the repository is enabled by way of a directory **304** which consists of meta-data **305** representative of the data in the repository **102**, as well as a replica **306** of the supplier access profile database **212**. The directory **304** is kept in up to date with changes to the repository **102** in a manner that will be subsequently detailed herein. Each supplier **301** may generate requests **302** for information from the repository **102** over the network **101B**. The directory **304** receives these requests and determines whether the requested data is resident in the repository. If not, the directory responds to the supplier with an indication that the requested data does not exist in the repository **303**. If the supplier requests data existing in the repository **307**, the directory **304** executes an access control function, determining whether the request should be completed based upon the supplier's access profile data **306**. If the supplier requests information which, based upon its profile, it is entitled to receive, the directory forwards the request to repository **308** and the data is thereafter provided to the supplier. Alternatively, if the supplier requests information that conflicts with the access privileges established in the suppliers profile as seen in **306**, the directory will reject the access request **309**. Responses to successful requests **311** are subsequently retrieved from the repository **102** and made available to the supplier **301** in response table **310**. Responses

may be maintained in table **310** for a predetermined time period even after successful download by the requesting supplier **301** to accommodate subsequent authorized requests for the same part number by the same or by other authorized suppliers.

As previously noted, the repository **102** is mirrored outside the enterprise's Internet firewall **101c** in the form of a directory **304**, which includes a meta-data representation **305** of the data records stored in repository **102**. In a preferred embodiment, the directory **304** is maintained as a Lotus Notes database on a Lotus Domino server belonging to enterprise **101** (Lotus and Notes are registered trademarks and Domino is a trademark of International Business Machines Corporation). The directory **304** serves as a filter for access requests **302** from the suppliers, determining which requests will be rejected and which will be forwarded to the repository **102**.

It will be illustrative to analyze the steps undertaken in transmitting a request for a data record using the access control system **300**. FIG. **4** depicts a flow diagram **400** for the process of transmitting a request from supplier **301** for a data record **201** in repository **102** via access control system **300**. Starting at step **401** the supplier accesses the software for submitting a request which is preferably implemented as a Web-based application, and is prompted to log onto the system by providing a userid and password **402**. This is shown for example in the user logon screen in FIG. **5a**. It will be recalled that the supplier's userid **235** and password data **236** are stored in the access control database **212** and mirrored in the copy **306** in the directory **304**. The userid and password entered by the supplier **402** are compared against the access profile database **306** and if a match is found the process **400** continues, while if no match is found the supplier is not authorized to access the repository and the process ends **414**. Upon successful log on, it is determined whether this is the first time a supplier has logged onto the system **403**, if so, the supplier may be given the option of creating their format preference portion of their profile **404** (as shown in FIG. **5b**) if not, or after creating the preference profile the supplier will create a request for information on a data record **405** by entering the part number **207** and EC number **208** for the part. The supplier submits the request **406** and the request is routed to the meta data table **305** in directory **304** to determine whether the requested part number and EC exist in the repository **407**. If the requested part number and EC do not exist there is no data available on the requested record and the process is ended **414**. If the part number and EC are located in the meta data **305** the process continues to step **408** wherein the details for the requested data record as identified in the meta data **305** in step **407** are compared with the suppliers access profile information **306** as identified upon logging into the system **402**, to determine if the supplier is authorized to receive information on the requested data record. Thus, a determination is made in step **408** as to whether the data record matches the access control information described as part of table **225** of the database **212** and mirrored in the access profile database **306**. If the supplier is not authorized to retrieve this data file the system **300** will indicate that this record is not available for retrieval by the supplier **409** thereby ending the process **414**. Alternatively, if the supplier is authorized **408** the system **300** displays the retrieved information from the meta data **305** including the part number, EC and list of available formats with the preferred data formats for the supplier preselected **410** (see FIG. **5c**). As can be seen in **5c** the supplier is given the option of selecting formats other than those preselected by the system **300** based upon the suppliers data format preferences located in the access profile data base **306**. Irrespective of whether the supplier overrides its pre-

ferred formats **411**, the process next requires that the supplier submit this request **412**, at which point the request will pass through the directory **304** and the firewall **101c** to the repository **102** where it is handled in a manner that will be subsequently described. Thereafter the repository returns the information **413** requested by the supplier through the directory **304** in response table **310** for access by the supplier thereby ending the process **414**. The status of a request once submitted at step **412** is tracked **415** through its completion as is shown in FIG. **5D** which displays new requests, work in progress, files available for download and files which have previously been downloaded which are maintained on the directory for a predetermined time after the download in case the supplier needs to access the record again (for example if the supplier inadvertently deletes the downloaded record).

Having examined the process undertaken by a supplier for the submission and fulfillment of a request, it will now be instructive to consider how the enterprise **101** manages its response to a request from the supplier. Turning to FIG. **6** we can see that a request **308** from supplier **301** is sent through the firewall **101C** into the enterprise **101**. From the directory **304** it can be seen that the request **308** is forwarded to a Notes repository **601** which is comprised of the access profile database **220** and the original copy **602** of the parts meta-data **305** which is derived from the parts repository **102**. In operation, the directory **304** has meta data **305** and access profile databases **306** which are replicated from the Notes database **601** via its constituent tables **220** and **602** respectively. At this point the supplier **301** when accessing the directory **304** would be informed FIG. **5d** via status tracking **415** that his request is being processed.

The request **308** passes through **601** to a conversion processing logic **610** which includes a keyword prioritization table **611**. The conversion logic element **610** functions to determine whether the requested format will necessitate a translation from a file format stored in the repository **102** and further to determine which of such stored formats should be used for the translation.

FIG. **7** illustrates the process flow **700** implemented by the conversion logic **610**. Starting at step **701** the request coming through the database **601** is parsed **702** and the requested part number, requesting supplier, format requested (DFORM, DTYPE) as well as the results of the matching of the part number against the meta data table **602**, in particular the formats in which the requested part number are stored in the repository **102** are accessed. The flow continues to step **703** wherein it is determined whether a translation is required. A translation will be required where a supplier requests a format other than those stored in the repository **102** for the requested part number. If no translation is required no further processing for the conversion logic **610** is required and process continues to step **708** wherein a transaction indicating a request for the requested part number in the requested stored format is passed forward and the conversion process **700** is ended **709**.

Alternatively, if the requested format is not stored in repository **102**, the flow passes to step **704** wherein it is determined whether the requested part is stored in multiple formats. If the part is stored in only one format then that format will be the format used as the starting point for the translation of the part number file to the requested format. The transaction for such a request is created in step **707**. Alternatively, if the requested part number file is stored in multiple formats **704**, processing continues to step **705** wherein the keyword table **611** is accessed.

The keyword table is shown in FIG. **8**. In essence, the keyword table presents a two level list, the first level showing

potentially requested formats **801** and each item in the first list is related to a second level list **802** which is a prioritized list of formats, each of which might be used as a starting point for performing the required format translations to the request format **801**. The organization of the second level prioritized list is preferably based upon the level of information required for the request file format **801**, and the list proceeds in decreasing order listing first the file formats having at least as much or more data than the request format and continuing forwarding in decreasing order of data content. In an alternative implementation the listing order may be based upon other criteria such as minimizing the amount of processing required for a translation to the requested format. In still a further refinement it is contemplated that multiple versions of the keyword table might be utilized, each comprising a second level list that is prioritized based upon a different criteria. Responsive to a requester provided indication of translation criteria such as preservation of data, the appropriate keyword table version, with a second level list prioritized in accordance with the requester's preference, would be used to determine the appropriate stored file format to be used as a starting point for the translation.

Following the process **700**, the keyword table **611** is accessed and the requested format is accessed in the first level list. Thereafter the second level list is accessed compared against the results of the meta data **602** portion of the parsed request (indicating the formats of the stored part number file) and the highest priority listed format which is stored in the repository is chosen **706**. Thereafter the transaction requesting translation to the chosen format is created **707** and the process is ended **709**.

After processing via the conversion logic **610** and the request for the part number file and translation (if needed) are passed through a secure agent **603** which in a preferred embodiment is a Java program which functions to securely transfer the processed request **308** via HTTP to the Application server **604** which in this case is a Websphere Application server. This request includes the part number, the requested file format, and if a translation is required, it will also include the format which should be used as the basis for the translation.

The application server **604** builds a transaction request **607** which will be processed by the repository **102** to generate a properly formatted response containing the requested part number data.

In a preferred embodiment the repository is a DB2(R) database running on an MVS operating system. The server **604** includes Java servlets **605** and Enterprise Java Beans **606** which instantiate the transaction request **607** to be submitted via an application program interface API **608** to the repository **102**. The server **604**, in a preferred embodiment, builds the required set of messages into the API **608** for transmission **607** to the repository **102** so as to interface with the MVS-based database **102** to extract the requested information therefrom.

The API **608** provides the interface between the server **604** and the repository **102**. The repository receives the request from the server **604** and extracts the requested part number file in the appropriate format. If the supplier **301** requests a part number file in a previously stored format, then no translation will be required, and the file as extracted from the repository is forwarded to the database **601** where from it is replicated to the directory database **304** and made available to the requesting supplier **301** upon subsequent successful logon thereto. Alternatively, if the supplier requests a part number file in a format not previously stored, the conversion logic **610**

will have previously designated a format from which to perform a translation to the request file format.

The request 608 will prompt the repository 102 to extract this designated part number file in the determined format and pass it to the conversion engine 609 for translation into the requested format. The repository interprets the messages sent from the server 604 which instructs the extraction of the required part number file in the appropriate format, and which directs the file to be translated, if necessary, by the conversion engine 609 into the requested format.

The conversion engine 609 includes software for translating the request files from stored format to the requested formats. Such software is well known to those skilled in the art and as such will not be covered in detail herein. It is sufficient to note that the tools required to perform a translation from a given file format to another file format are readily incorporated into the conversion engine 609 and that the conversion engine functions to provide output in a format requested by the supplier 301 when such a requested format is not previously available in the repository 102.

In a further preferred embodiment a conversion engine 609 might be alternatively or additionally implemented in the external access control system's directory 304. In such an embodiment the translation of the requested data file might initially take place in the directory 304 after the selected starting file format is extracted from the repository as described above. Moreover, once provided to the directory 304, the translated data file may be retained thereat for a predetermined time period and further translated based upon subsequent authorized requests for the data file in different file formats. In such an embodiment, the number of accesses via requests to the enterprise may be minimized at the expense of processing overhead in the directory 304 and the limitation that a translation operation based upon a given request for a data file retained at the directory 304 will likely have only one stored format in the directory 304 upon which to base the translation.

The result of the transaction which extracts the part number file from the repository 102 and optionally performs the conversion 609 is a properly formatted part number file 612 responsive to a supplier's 301 request. The output 612 is forwarded to database 601 whereat the part number and format are matched with authorized requests received at the database 601 for the part number file in the format of output 612. The output is thereafter transmitted through firewall 101c outside of the enterprise 101 to the directory database 304 at table 310 and made available to the requesting supplier 301. The supplier by logging in 402 will be presented with an indication (FIG. 5d) via the status tracking feature 415 of the access control system, that the requested part number file is now available for download from the directory database 304.

It is possible that the request part number may be requested in the format of the output 612 contemporaneously by multiple suppliers. This is especially true when a part number has undergone a recent engineering change which affects multiple suppliers. The likelihood in such situations is that the part number file will be requested by multiple suppliers over a span of days and/or weeks surrounding the change. Accordingly, and as previously described, once a file is transmitted to the response table 310 for the directory database 304 it may be cached thereat for a predetermined time period so that subsequent requests to access the part number file may be handled completely out of the directory database 304 without requiring access to the repository 102. As with any caching operation, the files maintained that are provided to the repository with an expiration date 310a after which the data will be considered unreliable (i.e., it has become stale) and the files

are thereafter purged. Moreover, and as previously described, the presence of optional conversion engine 609 at the directory 304 enables the conversion from a cached file format to a different subsequently requested format without requiring reference to the repository 102.

Finally, the process for creating and updating the repository meta data file will be considered. In order to ensure that the meta data 305 in directory 304 is kept current, it is necessary to provide periodic updates to the directory based upon changes in the data stored in the repository 102. Such changes might for example include additions, deletions or modification of existing data files, as well as the availability of previously stored data files in new formats. FIG. 9 illustrates the mechanisms for moving data from the repository 102 to the meta data table 305 in directory 304. For the initial loading of data into the directory 304, a flat file is created including a meta data representation of the data file information present in the repository. This flat file is loaded into the meta data database 602 of the Notes database 601 and thereafter forwarded to the meta data table 305 of the directory 304. Accordingly, an initial mass-loading of the meta data table 305 is affected.

In order to keep the meta data table current, periodic updates are provided from the repository to the directory 304. Accordingly, a second data flow is shown in FIG. 9 for update data whereby changes to the repository 102 are captured as so-called delta meta data and sent via Notes mail to the meta data database 602 of the Notes database 601 and thereafter forwarded to the meta data table 305 of directory 304 outside the firewall. The delta updates may be forwarded by a scheduled query that generates and mails the data as output on a predetermined basis. Additionally, it is contemplated that certain high priority change may immediately trigger such an update or alternatively, that a system administrator can manually affect such an update.

As described above, embodiments can be embodied in the form of computer-implemented processes and apparatuses for practicing those processes. In exemplary embodiments, the invention is embodied in computer program code executed by one or more network elements. Embodiments include computer program code containing instructions embodied intangible media, such as floppy diskettes, CD-ROMs, hard drives, or any other computer-readable storage medium wherein, when the computer program code is loaded into and executed by a computer, the computer becomes an apparatus for practicing the invention. Embodiments include computer program code, for example, whether stored in a storage medium, loaded into and/or executed by a computer, or transmitted over some transmission medium, such as over electrical wiring or cabling, through fiber optics, or via electromagnetic radiation, wherein, when the computer program code is loaded into and executed by a computer, the computer becomes an apparatus for practicing the invention. When implemented on a general-purpose microprocessor, the computer program code segments configure the microprocessor to create specific logic circuits.

While the invention has been described in detail above in the context of a preferred embodiment it is readily apparent to those of skill in the art that various modifications, substitutions, enhancements or the application of these principals in a different manner are all contemplated to be within the scope of the invention which may be practiced with such modifications while still falling within the scope of the appended claims.

13

The invention claimed is:

1. A computer-implemented method for providing access to data files stored in a data repository comprising the steps of: receiving a request for a data file from a requester, the request specifying a data format preference for receiving the data file, the requested data format being different than at least one of a data format used to create the data file and a data format in which the data file is stored at the time of the request; parsing said request into at least a metadata portion being stored in a metadata directory indicating the contents of the repository; receiving said request at a staging database; creating a flat file that includes said metadata portion; loading said flat file into said metadata directory; accessing a keyword table that is stored in the repository, said keyword table having a first level showing requested formats and a second level list which is a prioritized list of formats; accessing said data format preference from the first level; comparing said prioritized list of formats to said metadata portion of said parsed request; selecting a highest priority that is listed in said prioritized list of formats; determining if said requester is authorized to access said requested data file; translating the requested data file from a stored data format into said requested data format responsive to said receiving of said request from said requester, if said stored format differs from said requested format; making said translated data file accessible to said requester if it is determined that said requester is authorized; and providing periodic updates of said meta data directory, said updates reflecting changes to data in the data repository, wherein said changes to the data in the data repository are captured via delta metadata and forwarded by a schedule query that generates and mails the data to said metadata directory on at least one of a predetermined basis and an immediately triggered update based on a high priority change.
2. A method according to claim 1 wherein the repository resides behind a secure firewall, and said metadata directory resides outside of said firewall.
3. A method according to claim 1 wherein said determining step further including the step of: providing an access control element including data indicating whether a requester is to be permitted to access said requested data file.
4. A method according to claim 1 wherein said repository resides behind a secure firewall and wherein said translated data file is retained at a response repository outside of said firewall in response to said request and is accessible from said response repository by any authorized requester.
5. A method according to claim 1 wherein said repository resides behind a secure firewall, the method further comprising the steps of: providing an access control system outside of said firewall for receiving said request for said data file; determining via said access control system if the requested data file is stored in the repository; and passing said request to said repository if said requester is authorized and said requested data file is stored in said repository.
6. A method according to claim 5 wherein said translated data file is retained at a response repository outside of said firewall in response to said request and is accessible from said response repository by any authorized requester.

14

7. A method according to claim 6 wherein: said translating step is undertaken at said response repository; and said translated file retained at said response repository may be further translated based upon requests from said authorized requesters.
8. A method according to claim 7 further including the steps of: determining based on said received request which of said stored data formats is to be used to perform said translating into said requested file format; and using the results of said determination to retrieve the data file having the determined format from said repository, wherein said staging database is within said firewall.
9. A method according to claim 8 wherein said access control system includes said response repository outside of said firewall and wherein said translated data file is transferred from said staging database to said response repository outside of said firewall and retained at said response repository outside of said firewall in response to said request.
10. A method according to claim 1 further comprising the steps of: providing the requester with the status of the fulfillment of the request for the data file; providing an indication of stored formats for the requested data file; and storing a requester's format preferences for the requested data file.
11. A computer program product for providing access to data files stored in a data repository, the computer program product embedded on a computer-readable storage medium including executable instructions for causing a computer to implement a method, the method comprising: receiving a request for a data file from a requester, the request specifying a data format preference for receiving the data file, the requested data format being different than at least one of a data format used to create the data file and a data format in which the data file is stored at the time of the request; parsing said request into at least a metadata portion being stored in a metadata directory indicating the contents of the repository; receiving said request at a staging database; creating a flat file that includes said metadata portion; loading said flat file into said metadata directory; accessing a keyword table that is stored in the repository, said keyword table having a first level showing requested formats and a second level list which is a prioritized list of formats; accessing said data format preference from the first level; comparing said prioritized list of formats to said metadata portion of said parsed request; selecting a highest priority that is listed in said prioritized list of formats; determining if said requester is authorized to access said requested data file; translating the requested data file from a stored data format into said requested data format responsive to said receiving of said request from said requester, if said stored format differs from said requested format; making said translated data file accessible to said requester if it is determined that said requester is authorized; and providing periodic updates of said meta data directory, said updates reflecting changes to data in the data repository, wherein said changes to the data in the data repository are captured via delta metadata and forwarded by a schedule query that generates and mails the data to said metadata

15

directory on at least one of a predetermined basis and an immediately triggered update based on a high priority change.

12. A computer program product according to claim 11 wherein the repository resides behind a secure firewall, and said metadata directory resides outside of said firewall. 5

13. A computer program product according to claim 11 wherein said determining step further including the step of: providing an access control element including data indicating whether a requester is to be permitted to access said requested data file. 10

14. A computer program product according to claim 11 wherein said repository resides behind a secure firewall and wherein said translated data file is retained at a response repository outside of said firewall in response to said request and is accessible from said response repository by any authorized requester. 15

15. A computer program product according to claim 11 wherein said repository resides behind a secure firewall, the method further comprising the steps of: 20

providing an access control system outside of said firewall for receiving said request for said data file;

determining via said access control system if the requested data file is stored in the repository; and

passing said request to said repository if said requester is authorized and said requested data file is stored in said repository. 25

16. A computer program product according to claim 15 wherein said translated data file is retained at a response repository outside of said firewall in response to said request and is accessible from said response repository by any authorized requester. 30

16

17. A computer program product according to claim 16 wherein:

said translating step is undertaken at said response repository; and

said translated file retained at said response repository may be further translated based upon requests from said authorized requesters.

18. A computer program product according to claim 17 wherein the method further comprises the steps of:

determining based on said received request which of said stored data formats is to be used to perform said translating into said requested file format; and

using the results of said determination to retrieve the data file having the determined format from said repository, wherein said staging database is within said firewall.

19. A computer program product according to claim 18 wherein said access control system includes said response repository outside of said firewall and wherein said translated data file is transferred from said staging database to said response repository outside of said firewall and retained at said response repository outside of said firewall in response to said request.

20. A computer program product according to claim 11, wherein the method further comprises the steps of:

providing the requester with the status of the fulfillment of the request for the data file;

providing an indication of stored formats for the requested data file; and

storing a requester's format preferences for the requested data file.

* * * * *