US007779015B2

(12) **United States Patent**
Abbott et al.

(10) **Patent No.: US 7,779,015 B2**
(45) **Date of Patent: Aug. 17, 2010**

(54) **LOGGING AND ANALYZING CONTEXT ATTRIBUTES**

(75) Inventors: **Ken Abbott**, Kirkland, WA (US); **Josh Freedman**, Mercer Island, WA (US); **Dan Newell**, Medina, WA (US); **Jim Robarts**, Redmond, WA (US)

(73) Assignee: **Microsoft Corporation**, Redmond, WA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1088 days.

(21) Appl. No.: **10/984,511**

(22) Filed: **Nov. 8, 2004**

(65) **Prior Publication Data**

US 2005/0086243 A1 Apr. 21, 2005

Related U.S. Application Data

(63) Continuation of application No. 09/541,326, filed on Apr. 2, 2000, now abandoned, and a continuation-in-part of application No. 09/464,659, filed on Dec. 15, 1999, now Pat. No. 6,513,046, which is a continuation-in-part of application No. 09/216,193, filed on Dec. 18, 1998, now Pat. No. 6,466,232.

(51) **Int. Cl.**
G06F 17/30 (2006.01)

(52) **U.S. Cl.** **707/754**; 707/804; 707/921; 707/941; 707/962; 702/127

(58) **Field of Classification Search** ..... None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,973,251	A *	8/1976	Stephans	340/309.7
4,283,712	A *	8/1981	Goody	377/5
4,458,331	A	7/1984	Amezcua et al.	
4,569,026	A	2/1986	Best	
4,815,030	A	3/1989	Cross et al.	
4,905,163	A	2/1990	Garber et al.	
4,970,683	A	11/1990	Harshaw et al.	

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0661627 A1 7/1995

(Continued)

OTHER PUBLICATIONS

Bishop, Todd., "Hard ware", Jul. 28, 2000, Puget Sound Business Journal, print edition, pp. 1-4.*

(Continued)

Primary Examiner—Pierre M Vital
Assistant Examiner—Christopher P Nofal
(74) *Attorney, Agent, or Firm*—Wolf, Greenfield & Sacks, P.C.

(57) **ABSTRACT**

A facility for logging context attributes is described. For each of a set of selected context attributes, the facility determines a target frequency with which values of the selected context attribute are to be logged. For each of the set of selected context attributes, the facility obtains values of the selected context attribute at a frequency approximating the target frequency determined for the selected context attribute. Then, for each obtained context attribute value, the facility writes the obtained value to a storage device in a manner that identifies its context attribute.

32 Claims, 10 Drawing Sheets



U.S. PATENT DOCUMENTS

4,991,087	A		2/1991	Burkowski et al.
5,032,083	A		7/1991	Friedman 434/112
5,133,075	A		7/1992	Risch
5,201,034	A		4/1993	Matsuura et al. 395/155
5,208,449	A		5/1993	Eastman et al. 235/462
5,214,757	A		5/1993	Mauney et al. 395/161
5,227,614	A		7/1993	Danielson et al. 235/380
5,237,684	A		8/1993	Record et al.
5,251,294	A		10/1993	Abelow
5,267,147	A		11/1993	Harshaw et al.
5,278,946	A		1/1994	Shimada et al.
5,285,398	A		2/1994	Janik
5,317,568	A		5/1994	Bixby et al. 370/85.6
5,327,529	A		7/1994	Fults et al.
5,335,276	A		8/1994	Thompson et al. 380/21
5,339,395	A		8/1994	Pickett et al.
5,353,399	A		10/1994	Kuwamoto et al.
5,388,198	A		2/1995	Layman et al. 395/155
5,398,021	A		3/1995	Moore
5,416,730	A		5/1995	Lookofsky 364/708.1
5,454,074	A		9/1995	Hartel et al.
5,470,233	A		11/1995	Fruchterman et al. 434/112
5,471,629	A		11/1995	Risch
5,481,667	A		1/1996	Bieniek et al.
5,493,692	A		2/1996	Theimer et al. 455/26.1
5,506,580	A		4/1996	Whiting et al. 341/51
5,513,646	A		5/1996	Lehrman et al.
5,522,026	A		5/1996	Records et al.
5,535,323	A		7/1996	Miller et al.
5,537,618	A		7/1996	Boulton et al.
5,539,665	A		7/1996	Lamming et al. ..... 364/514 R
5,544,321	A		8/1996	Theimer et al. 395/200.11
5,553,609	A		9/1996	Chen et al. 128/630
5,555,376	A		9/1996	Theimer et al. 395/200.09
5,559,520	A		9/1996	Barzegar et al. 342/357
5,568,645	A		10/1996	Morris et al. 395/800
5,572,401	A		11/1996	Carroll
5,592,664	A		1/1997	Starkey
5,601,435	A		2/1997	Quy ..... 434/307 R
5,603,054	A		2/1997	Theimer et al. 395/826
5,611,050	A		3/1997	Theimer et al. 395/200.09
5,642,303	A		6/1997	Small et al. 364/705.05
5,646,629	A		7/1997	Loomis et al. 342/357
5,659,746	A		8/1997	Bankert et al.
5,689,619	A		11/1997	Smyth
5,689,708	A		11/1997	Regnier et al.
5,701,894	A		12/1997	Cherry et al.
5,704,366	A		1/1998	Tacklind et al. 128/716
5,710,884	A		1/1998	Dedrick
5,715,451	A		2/1998	Marlin 395/615
5,717,747	A		2/1998	Boyle, III et al.
5,719,744	A		2/1998	Jenkins et al. 361/683
5,726,660	A		3/1998	Purdy et al. 342/357
5,726,688	A		3/1998	Siefert et al.
5,740,037	A		4/1998	McCann et al.
5,745,110	A		4/1998	Ertemalp
5,751,260	A		5/1998	Nappi et al. 345/8
5,752,019	A		5/1998	Rigoutsos et al.
5,761,662	A		6/1998	Dasan
5,781,913	A		7/1998	Felsenstein et al. 707/501
5,787,234	A		7/1998	Molloy
5,787,279	A		7/1998	Rigoutsos
5,790,974	A		8/1998	Tognazzini 701/204
5,796,952	A		8/1998	Davis et al.
5,798,733	A		8/1998	Ethridge 342/357
5,812,865	A	*	9/1998	Theimer et al. 709/228
5,818,446	A		10/1998	Bertram et al.
5,826,253	A		10/1998	Bredenberg
5,831,594	A		11/1998	Tognazzini et al.
5,832,296	A		11/1998	Wang et al.
5,835,087	A	*	11/1998	Herz et al. 715/810
5,852,814	A		12/1998	Allen
5,873,070	A		2/1999	Bunte et al. 705/28
5,878,274	A		3/1999	Kono et al. 395/828
5,879,163	A		3/1999	Brown et al.
5,899,963	A		5/1999	Hutchings 702/145
5,902,347	A		5/1999	Backman et al. 701/200
5,905,492	A		5/1999	Straub et al.
5,910,799	A		6/1999	Carpenter et al. 345/333
5,911,132	A		6/1999	Sloane
5,913,030	A		6/1999	Lotspiech et al.
5,924,074	A		7/1999	Evans 705/3
5,937,160	A	*	8/1999	Davis et al. 709/203
5,938,721	A		8/1999	Dussell et al. 701/211
5,942,986	A		8/1999	Shabot et al.
5,945,988	A		8/1999	Williams et al.
5,948,041	A		9/1999	Abo et al. 701/207
5,953,718	A		9/1999	Wical
5,959,611	A		9/1999	Smailagic et al. 345/156
5,966,126	A		10/1999	Szabo
5,966,533	A		10/1999	Moody 395/702
5,966,710	A		10/1999	Burrows
5,971,580	A		10/1999	Hall et al.
5,974,262	A		10/1999	Fuller et al.
5,977,968	A		11/1999	Le Blanc
5,983,335	A		11/1999	Dwyer, III 712/23
5,991,687	A		11/1999	Hale et al. 701/207
5,991,735	A		11/1999	Gerace
5,995,956	A		11/1999	Nguyen
5,999,932	A		12/1999	Paul
5,999,943	A		12/1999	Nori et al.
5,999,975	A		12/1999	Kittaka et al.
6,003,082	A		12/1999	Gampper et al.
6,006,251	A		12/1999	Toyouchi et al.
6,012,152	A		1/2000	Douik et al.
6,014,638	A		1/2000	Burge et al. 705/27
6,023,729	A		2/2000	Samuel et al.
6,041,331	A		3/2000	Weiner et al.
6,041,365	A		3/2000	Kleinerman
6,044,415	A		3/2000	Futral et al.
6,047,301	A		4/2000	Bjorklund et al. 708/139
6,047,327	A		4/2000	Tso et al.
6,055,516	A		4/2000	Johnson et al.
6,064,943	A		5/2000	Clark, Jr. et al. 702/2
6,067,084	A		5/2000	Fado et al.
6,081,814	A		6/2000	Mangat et al.
6,085,086	A		7/2000	La Porta et al.
6,088,689	A		7/2000	Kohn et al.
6,091,411	A		7/2000	Straub et al.
6,092,101	A		7/2000	Birrell et al.
6,094,625	A		7/2000	Ralston
6,098,065	A		8/2000	Skillen et al.
6,105,063	A		8/2000	Hayes, Jr.
6,108,197	A		8/2000	Janik 361/683
6,108,665	A		8/2000	Bair et al.
6,112,246	A		8/2000	Horbal et al.
6,122,348	A		9/2000	French-St. George et al.
6,122,960	A		9/2000	Hutchings et al. 73/493
6,127,990	A		10/2000	Zwern 345/8
6,131,067	A		10/2000	Girerd et al.
6,134,532	A		10/2000	Lazarus et al.
6,154,745	A		11/2000	Kari et al.
6,155,960	A		12/2000	Roberts et al.
6,164,541	A		12/2000	Dougherty et al.
6,169,976	B1		1/2001	Colosso
6,185,534	B1		2/2001	Breese et al.
6,188,399	B1		2/2001	Voas et al.
6,195,622	B1		2/2001	Altschuler et al. 703/2
6,198,394	B1		3/2001	Jacobsen et al.
6,199,099	B1		3/2001	Gershman et al.
6,215,405	B1		4/2001	Handley et al.
6,218,958	B1		4/2001	Eichstaedt et al.
6,230,111	B1		5/2001	Mizokawa 702/182
6,236,768	B1		5/2001	Rhodes et al.

6,256,633	B1	7/2001	Dharap	
6,262,720	B1	7/2001	Jeffrey et al.	
6,263,268	B1	7/2001	Nathanson	
6,263,317	B1	7/2001	Sharp et al.	
6,272,470	B1 *	8/2001	Teshima	705/3
6,272,507	B1	8/2001	Pirolli et al.	
6,282,517	B1	8/2001	Wolfe et al.	
6,285,757	B1	9/2001	Carroll et al.	
6,285,889	B1	9/2001	Nykanen et al.	
6,289,316	B1 *	9/2001	Aghili et al.	705/3
6,289,513	B1 *	9/2001	Bentwich	717/106
6,292,796	B1	9/2001	Drucker et al.	
6,294,953	B1	9/2001	Steeves	329/341
6,305,007	B1 *	10/2001	Mintz	717/116
6,305,221	B1	10/2001	Hutchings	73/488
6,308,203	B1	10/2001	Itabashi et al.	
6,311,162	B1 *	10/2001	Reichwein et al.	705/1
6,314,384	B1 *	11/2001	Goetz	702/177
6,317,718	B1	11/2001	Fano	
6,321,158	B1	11/2001	DeLorme et al.	
6,321,279	B1	11/2001	Bonola	
6,327,535	B1	12/2001	Evans et al.	
6,349,307	B1	2/2002	Chen	
6,353,398	B1	3/2002	Amin et al.	
6,353,823	B1	3/2002	Kumar	
6,356,905	B1	3/2002	Gershman et al.	
6,363,377	B1	3/2002	Kravets et al.	
6,385,589	B1	5/2002	Trusheim et al.	
6,392,670	B1	5/2002	Takeuchi et al.	
6,401,085	B1	6/2002	Gershman et al.	
6,405,159	B2	6/2002	Bushey et al.	703/13
6,405,206	B1	6/2002	Kayahara	
6,418,424	B1	7/2002	Hoffberg et al.	
6,421,700	B1	7/2002	Holmes et al.	
6,427,142	B1	7/2002	Zachary et al.	
6,430,531	B1	8/2002	Polish	
6,438,618	B1	8/2002	Lortz et al.	
6,442,549	B1	8/2002	Schneider	
6,442,589	B1	8/2002	Takahashi et al.	
6,442,620	B1	8/2002	Thatte et al.	
6,446,076	B1	9/2002	Burkey et al.	
6,446,109	B2	9/2002	Gupta	
6,460,036	B1 *	10/2002	Herz	1/1
6,462,759	B1	10/2002	Kurtzberg et al.	
6,466,232	B1	10/2002	Newell et al.	
6,477,117	B1	11/2002	Narayanaswami et al.	
6,483,485	B1	11/2002	Huang et al.	
6,484,200	B1	11/2002	Angal et al.	
6,487,552	B1 *	11/2002	Lei et al.	707/4
6,490,579	B1 *	12/2002	Gao et al.	707/4
6,505,196	B2	1/2003	Drucker et al.	
6,507,567	B1	1/2003	Willars	
6,507,845	B1	1/2003	Cohen et al.	
6,513,046	B1	1/2003	Abbott, III et al.	707/104.1
6,519,552	B1	2/2003	Sampath et al.	
6,526,035	B1	2/2003	Atarius et al.	
6,529,723	B1	3/2003	Bentley	
6,539,336	B1 *	3/2003	Vock et al.	702/182
6,542,889	B1	4/2003	Aggarwal et al.	
6,546,425	B1	4/2003	Hanson et al.	
6,546,554	B1	4/2003	Schmidt et al.	
6,549,915	B2	4/2003	Abbott, III et al.	707/104.1
6,549,944	B1 *	4/2003	Weinberg et al.	709/224
6,553,336	B1	4/2003	Johnson et al.	
6,563,430	B1	5/2003	Kemink et al.	
6,568,595	B1 *	5/2003	Russell et al.	235/462.01
6,571,279	B1	5/2003	Herz et al.	709/217
6,578,019	B1	6/2003	Suda et al.	
6,625,135	B1	9/2003	Johnson et al.	
6,636,831	B1	10/2003	Profit, Jr. et al.	
6,643,684	B1 *	11/2003	Malkin et al.	709/206
6,652,283	B1	11/2003	Van Schaack et al.	
6,661,437	B1	12/2003	Miller et al.	
6,672,506	B2	1/2004	Swartz et al.	
6,697,836	B1	2/2004	Kawano et al.	
6,704,722	B2	3/2004	Wang Baldonado	
6,704,785	B1	3/2004	Koo et al.	
6,704,812	B2	3/2004	Bakke et al.	
6,707,476	B1	3/2004	Hochstedler	
6,712,615	B2	3/2004	Martin	
6,714,977	B1	3/2004	Fowler et al.	
6,738,040	B2	5/2004	Jahn et al.	
6,738,759	B1	5/2004	Wheeler et al.	
6,741,188	B1	5/2004	Miller et al.	
6,741,610	B1	5/2004	Volftsun et al.	
6,747,675	B1	6/2004	Abbott et al.	
6,751,620	B2	6/2004	Orbanes et al.	
6,766,245	B2	7/2004	Padmanabhan	
D494,584	S	8/2004	Schlieffers et al.	
6,791,580	B1	9/2004	Abbott et al.	
6,795,806	B1	9/2004	Lewis et al.	
6,796,505	B2	9/2004	Pellaumail et al.	
6,801,223	B1	10/2004	Abbott et al.	
6,812,937	B1	11/2004	Abbott et al.	
6,829,639	B1	12/2004	Lawson et al.	
6,834,195	B2	12/2004	Brandenberg et al.	
6,834,208	B2	12/2004	Gonzales et al.	
6,837,436	B2	1/2005	Swartz et al.	
6,842,877	B2 *	1/2005	Robarts et al.	715/708
6,853,966	B2	2/2005	Bushey et al.	
6,868,525	B1	3/2005	Szabo	
6,874,017	B1	3/2005	Inoue et al.	
6,874,127	B2	3/2005	Newell et al.	
6,885,734	B1	4/2005	Eberle et al.	
6,963,899	B1	11/2005	Fernandez et al.	
6,968,333	B2	11/2005	Abbott et al.	
7,000,187	B2	2/2006	Messinger et al.	
7,010,501	B1	3/2006	Roslak et al.	
7,010,603	B2	3/2006	Martin, Jr. et al.	
7,040,541	B2	5/2006	Swartz et al.	
7,046,263	B1	5/2006	Abbott et al.	
7,055,101	B2	5/2006	Abbott et al.	
7,058,893	B2	6/2006	Abbott et al.	
7,058,894	B2	6/2006	Abbott et al.	
7,062,715	B2	6/2006	Abbott et al.	
7,063,263	B2	6/2006	Swartz et al.	
7,076,737	B2	7/2006	Abbott et al.	
7,080,322	B2	7/2006	Abbott et al.	
7,089,497	B2	8/2006	Abbott et al.	
7,096,253	B2 *	8/2006	Vinson et al.	709/203
7,103,806	B1 *	9/2006	Horvitz	714/43
7,107,539	B2	9/2006	Abbott et al.	
7,110,764	B1	9/2006	Blair et al.	
7,120,558	B2 *	10/2006	McIntyre et al.	702/183
7,124,125	B2	10/2006	Cook et al.	
7,137,069	B2	11/2006	Abbott et al.	
7,155,456	B2	12/2006	Abbott, III et al.	
7,162,473	B2	1/2007	Dumais et al.	
7,171,378	B2	1/2007	Petrovich et al.	
7,195,157	B2	3/2007	Swartz et al.	
7,203,906	B2	4/2007	Abbott et al.	
7,225,229	B1	5/2007	Abbott et al.	
7,231,439	B1	6/2007	Abbott et al.	
7,260,453	B2	8/2007	Poier et al.	
7,349,894	B2	3/2008	Barth et al.	
7,360,152	B2	4/2008	Capps et al.	
7,385,501	B2	6/2008	Miller et al.	
7,386,477	B2	6/2008	Fano	
7,392,486	B1	6/2008	Gyde et al.	
7,395,221	B2	7/2008	Doss et al.	
7,444,594	B2	10/2008	Abbott et al.	
7,464,153	B1	12/2008	Abbott et al.	
7,512,889	B2	3/2009	Newell et al.	
7,533,052	B2	5/2009	Tilfors et al.	
7,533,082	B2	5/2009	Abbott et al.	
7,561,200	B2	7/2009	Garvey, III et al.	

7,571,218	B2	8/2009	Tanaka et al.	
7,614,001	B2	11/2009	Abbott et al.	
7,647,400	B2	1/2010	Abbott et al.	
2001/0030664	A1	10/2001	Shulman et al.	
2001/0040590	A1	11/2001	Abbott et al.	
2001/0040591	A1	11/2001	Abbott et al.	
2001/0043231	A1	11/2001	Abbott et al.	
2001/0043232	A1	11/2001	Abbott et al.	
2002/0032689	A1	3/2002	Abbott, III et al.	707/104.1
2002/0044152	A1	4/2002	Abbott et al.	
2002/0052930	A1	5/2002	Abbott et al.	
2002/0052963	A1	5/2002	Abbott et al.	
2002/0054130	A1	5/2002	Abbott et al.	
2002/0054174	A1	5/2002	Abbott et al.	
2002/0078204	A1	6/2002	Newell et al.	
2002/0080155	A1	6/2002	Abbott et al.	
2002/0080156	A1	6/2002	Abbott et al.	
2002/0083025	A1*	6/2002	Robarts et al.	706/12
2002/0083158	A1	6/2002	Abbott et al.	
2002/0087525	A1	7/2002	Abbott et al.	
2002/0099817	A1	7/2002	Abbott et al.	
2002/0147880	A1	10/2002	Wang Baldonado	
2002/0191034	A1	12/2002	Sowizral et al.	
2003/0046401	A1	3/2003	Abbott et al.	
2003/0154476	A1	8/2003	Abbott, III et al.	725/37
2003/0186201	A1	10/2003	Martin	
2003/0229900	A1*	12/2003	Reisman	725/87
2004/0088328	A1	5/2004	Cook et al.	
2004/0133600	A1	7/2004	Homer	
2004/0186854	A1	9/2004	Choi	
2004/0201500	A1	10/2004	Miller et al.	
2004/0215663	A1	10/2004	Liu et al.	
2004/0267700	A1*	12/2004	Dumais et al.	707/2
2004/0267812	A1	12/2004	Harris et al.	
2005/0027704	A1*	2/2005	Hammond et al.	707/5
2005/0034078	A1	2/2005	Abbott et al.	
2005/0066282	A1	3/2005	Abbott et al.	
2005/0160113	A1	7/2005	Sipusic et al.	
2005/0165843	A1	7/2005	Capps et al.	
2005/0193017	A1	9/2005	Kim	
2005/0266858	A1	12/2005	Miller et al.	
2005/0272442	A1	12/2005	Miller et al.	
2006/0004680	A1	1/2006	Robarts et al.	
2006/0019676	A1	1/2006	Miller et al.	
2006/0136393	A1	6/2006	Abbott et al.	
2006/0259494	A1*	11/2006	Watson et al.	707/10
2007/0022384	A1	1/2007	Abbott et al.	
2007/0043459	A1	2/2007	Abbott et al.	
2007/0089067	A1	4/2007	Abbott et al.	
2007/0130524	A1	6/2007	Abbott et al.	
2007/0168502	A1	7/2007	Abbott et al.	
2007/0185864	A1*	8/2007	Budzik et al.	707/5
2007/0266318	A1	11/2007	Abbott et al.	
2008/0090591	A1	4/2008	Miller et al.	
2008/0091537	A1	4/2008	Miller et al.	
2008/0147775	A1	6/2008	Abbott et al.	
2008/0161018	A1	7/2008	Miller et al.	
2008/0313271	A1	12/2008	Abbott et al.	
2009/0013052	A1	1/2009	Robarts et al.	
2009/0055752	A1	2/2009	Abbott et al.	
2009/0094524	A1	4/2009	Abbott et al.	
2009/0150535	A1	6/2009	Abbott et al.	
2009/0228552	A1	9/2009	Abbott et al.	
2009/0234878	A1*	9/2009	Herz et al.	707/102

FOREIGN PATENT DOCUMENTS

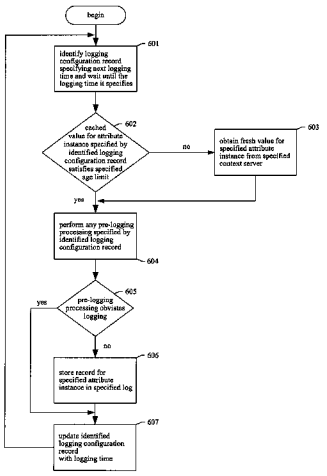EP	0759591	A1	2/1997
EP	0801342	A2	10/1997
EP	0846440	A2	6/1998
EP	0924615	A2	6/1999
JP	05-260188		10/1993
JP	11306002	A	11/1999
WO	WO 90/08361		7/1990
WO	WO-9531773	A1	11/1995
WO	WO 97/03434		1/1997
WO	WO-9734388	A2	9/1997
WO	WO-9800787	A1	1/1998
WO	WO 98/47084		10/1998
WO	WO 99/17228		4/1999
WO	WO-9926180	A1	5/1999
WO	WO-9966394	A1	12/1999
WO	WO-9967698	A2	12/1999
WO	WO-0036493	A1	6/2000

OTHER PUBLICATIONS

Cochran, Shannon, "The Development of Wearable Computing", Dr. Dobb's, online edition, pp. 1-2.*

Budzik et al., "Watson: Anticipating and Contextualizing Information Needs", May 1, 1999, In Proceedings of the Sixty-second Annual Meeting of the American Society for Information Science, pp. 1-14.*

Goharian et al., "Enterprise Text Processing: A Sparse Matrix Approach", 2001, IEEE, pp. 71-75.*

International Search Report, PCT/US01/10538, Aug. 14, 2002, 3 pages.

National Instruments, "BridgeVIEW and LabVIEW G Programming Reference Manual," Jan. 1998.

National Instruments, "LabVIEW User Manual,", Jan. 1998.

"'Affective Understanding:' Modeling and Responding to User Affect," retrieved Oct. 2, 1998, from http://www.media.mit.edu/affect/AC_research/understanding.html, pp. 1-3.

"Alps GlidePoint," retrieved Oct. 2, 1998, from http://www.alps.com/p17.html, 1 page.

"GyroPoint Technology," retrieved Oct. 2, 1998, from http://www.gyration.com/html/gyropoint.html, pp. 1-3.

"Haptics," retrieved Oct. 2, 1998, from http://www.ai.mit.edu/projects/handarm-haptics/haptics.html, pp. 1-2.

"Research Areas in Affective Computing," retrieved Oct. 2, 1998, from http://www.media.mit.edu/affect/, 1 page.

"Research on Affective Pattern Recognition and Modeling," retrieved Oct. 2, 1998, from http://www.media.mit.edu/affect/AC_research/recognizing.html, pp. 1-4.

"Research on Sensing Human Affect," retrieved Oct. 2, 1998, from http://www.media.mit.edu/affect/AC_research/sensing.html, pp. 1-5.

"Smart Rooms," retrieved Oct. 2, 1998, from http://vismod.www.media.mit.edu/vismod/demos/smartroom/, pp. 1-3.

"SmartDesk Home Page," retrieved Oct. 2, 1988, from http://vismod.www.media.mit.edu/vismod/demos/smartdesk/, pp. 1-4.

"The MIT Wearable Computing Web Page," retrieved Oct. 2, 1998, from http://wearables.www.media.mit.edu/projects/wearables/, pp. 1-3.

"Wearable Computer Systems for Affective Computing," retrieved Oct. 2, 1998, from http://www.media.mit.edu/affect/AC_research/wearables.html, pp. 1-5.

Aoki, H., et al., "Realtime Personal Positioning System for a Wearable Computer," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.

Amon et al., "Integration of Design Education, Research and Practice at Carnegie Mellon University: A Multi-Disciplinary Course in Wearable Computer Design," *In Proceedings of the Frontiers in Education Conference*, Nov. 1995, pp. 4a1, 14a1, vol. 2.

Bauer et al., "A Collaborative Wearable System with Remote Sensing," University of Oregon, Feb. 1996.

Billinghurst, M., et al., "New Ways to Manage Information," *IEEE*, pp. 57-64, Jan. 1999.

Bowskill, J., et al., "Wearable Location Mediated Telecommunications; A First Step Towards Contextual Communication," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.

Dey, A., et al., "The Conference Assistant: Combining Context-Awareness with Wearable Computing," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.

Fickas, S., et al., "Software Organization for Dynamic and Adaptable Wearable Systems," 1997, 8 pages.

Finger et al., "Rapid Design and Manufacture of Wearable Computers," Communication of the ACM, vol. 39, No. 2, Feb. 1996, pp. 63-68.
Gabbard, J., et al., "A Taxonomy of Usability Characteristics in Virtual Environments," Nov. 1997, retrieved from http://csgrad.cs.vt.edu/~jgabbard/ve/taxonomy/.
Gavrilova, T., et al., "An Approach to Mapping of User Model to Corresponding Interface Parameters," 1997, pp. 24-29, retrieved from http://citiseer.nj.nec.com/context/109679/352175>.
Golding, A., et al., "Indoor Navigation Using A Diverse Set of Cheap, Wearable Sensors," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.
Hull et al., "Towards Situated Computing," Hewlett-Packard Laboratories, HPL-97-66 (1997).
Kirsch, D., "The Sentic Mouse: A Tool for Measuring Emotional Valence," retrieved Oct. 2, 1998, from http://www.media.mit.edu/affect/AC_research/projects/sentic_mouse.html, pp. 1-2.
Kortuem et al., "Context-Aware, Adaptive Wearable Computers as Remote Interfaces to 'Intelligent' Environments," University of Oregon, Oct. 1998.
Kortuem, G., "When Cyborgs Meet: Building Communities of Cooperating Wearable Agents," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.
Lashkari, Y., et al., "Collaborative Interface Agents," Proceedings of AAAI '94 Conference, Seattle, WA, Aug. 1994.
Lehikoinen, J., et al., "MEX: A Distributed Software Architecture for Wearable Computers," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.
Leonhardi, A., et al., "Virtual Information Towers—A Metaphor for Intuitive, Location-Aware Information Access in a Mobile Environment," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.
Lunt, T., et al., "Knowledge-Based Intrusion Detection," *Proceedings of the Annual Artificial Intelligence Systems in Government Conference*, IEEE Comp. Soc. Press, vol. Conf. 4, 1989, pp. 102-107.
Maes, P., "Agents that Reduce Work and Information Overload," *Communications of the ACM 37*(7), Jul. 1994.
Mann, S., "'Smart Clothing': Wearable Multimedia Computing and 'Personal Imaging' to Restore the Technological Balance Between People and Their Environments," *ACM Multimedia*, pp. 163-174, Nov. 1996.
Metz, C., "MIT: Wearable PC's, Electronic Ink, and Smart Rooms," *PC Magazine*, pp. 192-193, Jun. 1998.
Oakes, C., "The Truman Show Realized?, " retrieved Oct. 21, 1998, from http://www.wired.com/news/news/technology/story/15745.html, pp. 1-4.
Ockerman et al., "Wearable Computer For Performance Support; Initial Feasibility Study," *International Symposium in Wearable Computers*, Oct. 1997, pp. 10-17.
Picard, R., et al., "Affective Wearables," Personal Technologies vol. 1:231-240, MIT Media Laboratory, 1997.
Rekimoto et al., "The World Through the Computer: Computer Augmented Interaction with Real World Environments," ACM, Nov. 1995, pp. 29-36.
Rhodes, B., "WIMP Interface Considered Fatal," retrieved Oct. 2, 1998, from http://rhodes.www.media.mit.edu./people/rhodes/Papers/no-wimp.html, pp. 1-3.
Rhodes, B., "The Wearable Remembrance Agent: A System for Augmented Memory," *Proceedings of the First International Symposium on Wearable Computers* (*ISWC '97*), Cambridge, MA, Oct. 13-14, 1997.
Rogers, E., et al., "Outbreak Agent: Intelligent Wearable Technology for Hazardous Environments," *1997 IEEE International Conference*, Orlando Florida, Oct. 12-15, 1997, pp. 3198-3203.
Sato, J., et al., "Autonomous Behavior Control of Virtual Actors Based on the AIR Model," *Proceedings Computer Animation*, Jun. 5, 1997.
Schneider, J., et al., "Modeling Wearable Negotiation in an Opportunistic Task Oriented Domain," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.
Smailagic et al., "Matching Interface Design with User Task: Modalities of Interaction with CMU Wearable Computers," IEEE Personal Communications, Feb. 1996, pp. 14-25.
Smailagic, A., et al., "MoCCA: A Mobile Communication and Computing Architecture," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.
Starner et al., "Visual Contextual Awareness in Wearable Computing," Media Lab, MIT, Oct. 1998.
Tan, H., et al., "Tactual Displays for Wearable Computing," *IEEE*, Massachusetts Institute of Technology Media Laboratory, pp. 84-88, 1997.
Yang, J., et al., "Smart Sight: A Tourist Assistant System," *3rd International Symposium on Wearable Computers*, San Francisco, CA, Oct. 18-19, 1999.
[No Author Listed] "Context Recognition by User Situation Data Analysis (Context)". Http://www.cs.helsinki.fi/group/context/. Last accessed Dec. 9, 2008, 7 pages.
[No Author Listed] "Context-Awareness in Wearable and Ubiquitous Computing." Future Computing Environments, 1997. GVU Technical Report GIT-GVU-97-11.
[No Author Listed] "Intelligent User Interface Prompt level,"IBM Technical Decision Bulletin, IBM Corp, New Yor,vol. 35, No. 1A, Jun. 1992, pp. 25-26.
[No Author Listed] "Workshop on Wearable Computing Systems," Aug. 19-21, 1996.
Bacon, et al. "Using Events to Build Distributed Applications," University of Cambridge, 1996. http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.34.4545. Last accessed Dec. 9, 2008, 8 pages.
Bates et al., Middleware Support for Mobile Multimedia Applications, ICL System Journal, Nov. 1997, 20 pages.
Bier, et al. "Toolglass and Magic Lenses: The See-Through Interface," Proceedings of SIGGRAPH'93, Computer Graphics and Annual Conference Series, ACM, pp. 73-80, Anaheim, California, 1993. http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.36.9741. Last accessed Dec. 9, 2008, 8 pages.
Billinghurst, et al., An Evaluation of Wearable Information Spaces, Proceedings of the Virtual Reality Annual International Symposium, 1998, 8 pages.
Billinghurst. Research Directions in Wearable Computing, University of Washington, May, 1998, 48 pages.
Biskup, et al, "Towards Secure Mediation", Oct. 1989.
Brown et al., "Using Explicit Requirements and Metrics for Interface Agent User Model Correction," Autonomous Agents '98.
Brown, et al. "Utility Theory-Based User Models for Intelligent Interface Agents," Proceedings of the Twelth Canadian Conference on Artificial Intelligence (AI'98), Jun. 1998.
Chen, et al., A Survey of Context-Aware Mobile Computing Research, Dartmouth Computer Science Technical Report, 2000, 16 pages.
Crabtree, et al. "Wearable Computing and the Remembrance Agent," BT Technology Journal, vol. 16, No. 3, Jul. 1998, pp. 118-124. http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.31.8514. Last accessed Dec. 9, 2008, 7 pages.
Cugola et al., Exploiting an Event-Based Infrastructure to Develop Complex Distributed Systems, 20th International Conference on Software Engineering (ICSE'98) Apr. 1998, p. 261-70, 10 pages.
D'Orazio, et al. Mobile Robot Position Determination Using Visual Landmarks. IEEE Transactions on Industrial Electronics, vol. 41, issue 6, Dec. 1994, pp. 654-662. Last accessed 112/9/08, 9 pages.
Dechamboux et al., Using a Distributed Shared Memory for Implementing Efficient Information Mediators, Proceedings of the International Conference and Exhibition on High-Performance Computing and Networking, Apr. 1996, 5 pages.
Dey et al., CyberDesk: A Framework for Providing Self-Integrating Context-Aware Services, Knowledge-Based Systems, 11:3-13, 1998, 10 pages.
Doorenbos, et al. "A Scalable Comparison-Shoping Agent for the World-Wide-Web," Proceedings of the First International Conference on Autonomous Agents, Marina Del Rey, California, Feb. 5-8, 1997 pp. 39-48. http://www.cs.washington.edu/homes/etzioni/papers/agents97.pdf. Last accessed Dec. 9, 2008, 10 pages.
European Office Action dated Feb. 13, 2009 for EP Application No. 01964695.9, 4 pages.
Goh et al., "Content Interchange: New Features and Formalisms for the Intelligent Integration of Information." *ACM transactions on*

Information Systems, 1997. http://dspace.mit.edu/bitstream/handle/1721.1/2642/SWP-3941-36987967.pdf?sequence=1. Last accessed Dec. 10, 2008. 25 pages.
Goodridge, "The Environment Understanding Interfae: Decting and Tracking Human Activity Through Multimedia Sensors." 1995.
Han, et al., "DBMiner: A System for Mining Knowledge in Large Relational Database,"Proceedings 1996 International Conference on Data Mining and Knowledge Discovery, Portland, OR, Aug. 1996. http://www.cs.ualberta.ca/zaiane/postscript/kdd96.pdf. Last accessed Dec. 9, 2008, 6 pages.
Harter, et al. "A Distributed Location System for the Active Office", IEEE Network, 1994 pp. 62-70.
Horvitz et al., Attention-Sensitive Alerting in Computing Systems, Microsoft Research, Aug. 1999.
Horvitz et al., In Pursuit of Effective Handsfree Decision Support: Coupling Bayesian Interference, Speech Understanding, and Understanding, and User Models, 1995, 8 pages.
International Search Report dated Sep. 29, 2003 for PCT Application Serial No. 00/20685, 3 pages.
International Search Report for PCT Application No. PCT/US01/10394, Mailed Jun. 13, 2002, 5 pages.
International Search Report PCT/US01/32543, Oct. 27, 2003, 3 pages.
International Search Report, Application No. PCT/US01/10599, Nov. 28, 2002.
Jakobovits, "Integrating Autonomous Heterogeneous Information Sources." University of Washington, Technical Report UV-CSE-971205, Jul. 15, 1997, 29 pages.
Joachims, T., Text categorization with support vector machines: learning with many relevant features, Machine Learning, European Conference on Machine Learning, Apr. 21, 1998 pp. 137-142.
Leonhardt et al., Multi-Sensor Location Tracking, Department of Computing, London UK Oct. 1998.
Losee, Jr., Miniminizing Information Overload: the ranking of electronic messages, Journal of Information Science 15, Elsevier Science Publishers B.V. 1989, pp. 179-189.
Mott, et al., A Formalism for Context Mediation based on Feature Logi, Feb. 1998. http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.52.4473. Last accessed Dec. 10, 2008, 11 pages.
Ni. Attribute Name Evaluation and its Implementation, School of Computing and methematics, Deakin University, Geelong, Victoria, May 16, 1994. http://www.deakin.edu.au/scitech/sit/dsapp/archive/techreport/TR-C94-10.pdf. Last accessed Dec. 9, 2008, 32 pages.
OA Dated Aug. 1, 2008 for U.S. Appl. No. 11/179,822.
OA Dated Nov. 28, 2008 for U.S. Appl. No. 11/761,210, 11 pages.
OA Dated Dec. 3, 2008 for U.S. Appl. No. 09/981,320, 40 pages.
OA Dated Jul. 28, 2008 for U.S. Appl. No. 10/984,511, 28 pages.
OA Dated Sep. 17, 2008 for U.S. Appl. No. 09/894,642, 28 pages.
OA Dated Aug. 14, 2008 for U.S. Appl. No. 10/981,941, 14 pages.
OA dated Dec. 4, 2008 for U.S. Appl. No. 11/567,902.
OA dated Jan. 2, 2009 for U.S. Appl. No. 11/559,854, 23 pages.
OA Dated Oct. 30, 2008 for U.S. Appl. No. 11/490,540, 37 pages.
OA Dated Sep. 15, 2008 for U.S. Appl. No. 11/033,974, 17 pages.
Ockerbloom, Mediating Among Diverse Data Formats: Thesis Summary, PhD Thesis, Technical Report CMU-CS-98-102, Department of Computer Sciences, Carnegie Mellon University, Pittsburgh, PA, Jan. 14, 1998, 15 pages.
Papakonstantinou et al., "MedMaker: A Mediatation System Based on Declarative Specification." 1995 http://citeseerx.ist.psu.edu/viewsoc/summary?di=10.1.1.35.735. Last accessed Nov. 25, 2008, 10 pages.
Pascoe, Adding Generic Contextual Capabilities to Wearable Computers, Proceedings of the 2nd International Symposium on Wearable Computers (ISWC '98), Pittsburgh, PA, Oct. 19-20, 1998, 8 pages.
Rhodes, Remembrance Agent: A continuously running automated information retrieval system, The Proceedings of the First International Conference on the Practical Application of Intelligent Agents and Multi Agent Technology, 1996, pp. 487-495.
Rhodes, The Wearable Remembrance Agent: A System for Augmented Memory. Personal Technologies Journal Special Issue on Wearable Computing, 1997, 12 pages.
Rosis, et al. "Adaptive Interaction with Knowledge-Based System," ACM 1994.
Sawhney, Contextual awareness, messaging and communication in nomadic audio environments, Massachusetts Institute of Technology, Jun. 1998 pp. 80-105, 25 pages.
Schilit et al, Disseminating Active Map Information to Mbile Hosts, IEEE Network, 1994, pp. 22-32, vol. 8-No. 5.
Schilit et al., Context-Aware Computing Applications, In Proceedings of the Workshop on Mobile Computing Systems and Applications, Dec. 1994, pp. 85-90.
Schilit et al., Customizing Mobile Applications, Proceedings USENIX Symposiumon Mobile and Location Independent Computing, Aug. 1993, 9 pages.
Schilit, et al. The ParcTab Mobile Computer System, IEEE WWOS-IV, 1993, 4 pages.
Schilt. A System Architecture for Context-Aware Mobile Computer, Columbia University, 1995, 153 pages.
Schmidt et al., "There's More to Context Than Location: Environment Sensing Technologies for Adaptive Mobile User Interfaces." Nov. 1998.
Spreitzer et al., "Providing Location Information in a Ubiquitous Computing Environment," Xeriox Palo Alto Research Center, ACM, 1993, pp. 270-283. http://www.computing/staff/kc/Lecturing/MSc/wk10/p270-spreitzer.pdf. Last access Dec. 9, 2008, 14 pages.
Spreitzer et al., Architectural Considerations for Scalable, Secure, Mobile Computing with Location Information, In The 14th International Conference on Distributed Computing Systems, Jun. 1994, pp. 29-38.
Spreitzer et al., Scalable, Secure, Mobile Computingh with Location Information Communications of the ACM, Jul. 1993, 1 page, vol. 36-No. 7.
Starner, Wearable Computing and Contextual Awareness, Massachusetts Institute of Technology, Jun. 1999, 248 pages.
Starovic, An Event Based Object Model for Distributed Programming, Technical Report TCD-CS-95-28, Dept. of Computer Science, Trinity College Dublin, Ireland, 1995, retrieved from http://citeseer.ist.psu.edu/starovic95event.html, 15 pages.
Theimer et al., Operating System Issue for PDAs, in Fourt Workshop on Workstation Operating Systems, 1993, 7 pages.
Wachowicz et al., "Combining Location and Data Management in an Environment for Total Mobility." University of Cambridge, England 1996.
Want, Active Badges and Personal Interactive Computing Objects, IEEE Transactions on Consumer Electronics, 1992, 11 pages, vol. 38- No. 1.
Want, et al., The Active Badge Location System, ACM Transactions on Information Systems, Jan. 1992, pp. 91-102, vol. 10-No. 1.
Wardell, "Stardock.net Releases WindowBlinds." Stardock.net, Inc. Oct. 4, 1999. http://stardock.net/media/pr_wb10.html. Last accessed Dec. 9, 2008, 2 pages.
Weiser, Some Computer Science Issues in Ubiquitous Computing, Communications of the ACM, Jul. 1993, pp. 75-84, vol. 36-No. 7.
Weiser, The Computer for the 21st Century, Scientific American, Sep. 1991, 8 pages.
Zenel, et al. "A General Purpose Proxy Filtering Mechanism Applied to the Mobile Environment," Proceedings of the 3rd Annual ACM/IEEE Internatioanl conference on Mobile comptuing and networking, MOBICOM'97. Budapest, Hungary, pp. 248-259. http://portal.acm.org/citation.cfm?id=262153. Last accessed Dec. 9, 2008, 12 pages.
Salber et al., The Design and Use of a Generic Context Server. Technical Report GIT-GVU-98-32. GVU Center, College of Computing, Georgia Institute of Technology. 1998. Available at ftp://ftp.cc.gatech.edu/pub/gvu/tr/1998/98-32.pdf. Last accessed Mar. 12, 2010.

* cited by examiner

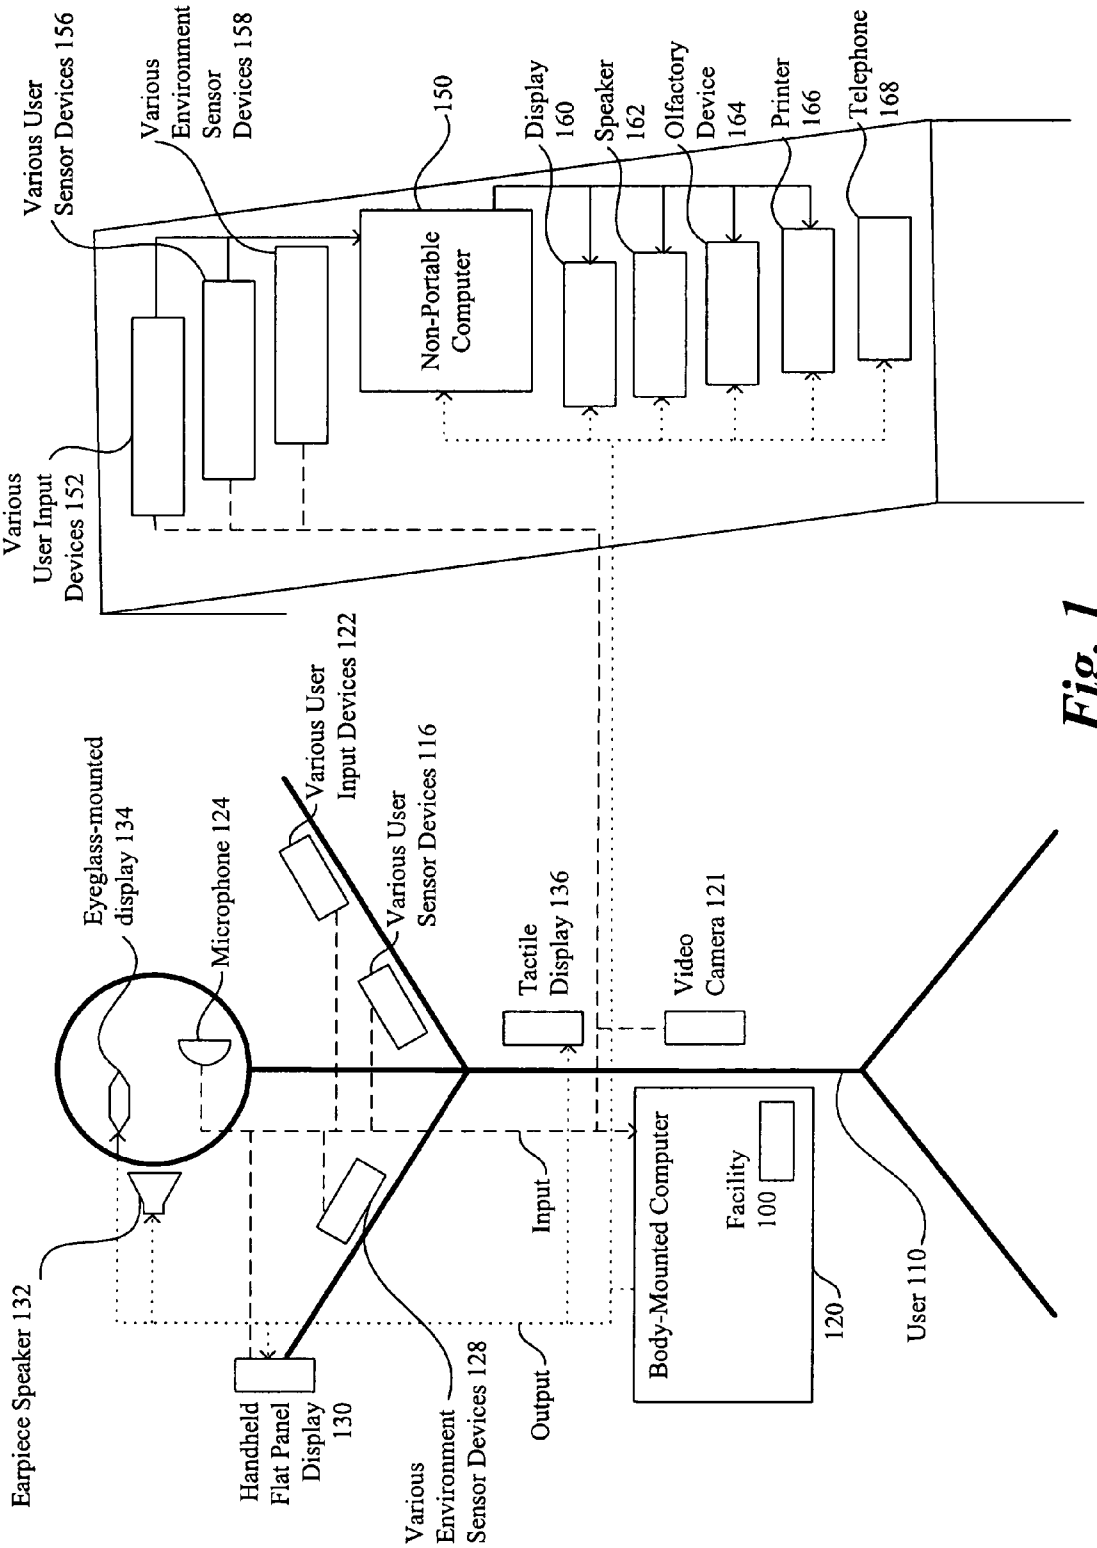
Various User Sensor Devices 156
Various Environment Sensor Devices 158
150
Display 160
Speaker 162
Olfactory Device 164
Printer 166
Telephone 168
Non-Portable Computer
Various User Input Devices 152
Various User Input Devices 122
Various User Sensor Devices 116
Eyeglass-mounted display 134
Microphone 124
Tactile Display 136
Video Camera 121
Earpiece Speaker 132
Handheld Flat Panel Display 130
Various Environment Sensor Devices 128
Input
Output
Body-Mounted Computer
Facility 100
120
User 110

Fig. 1

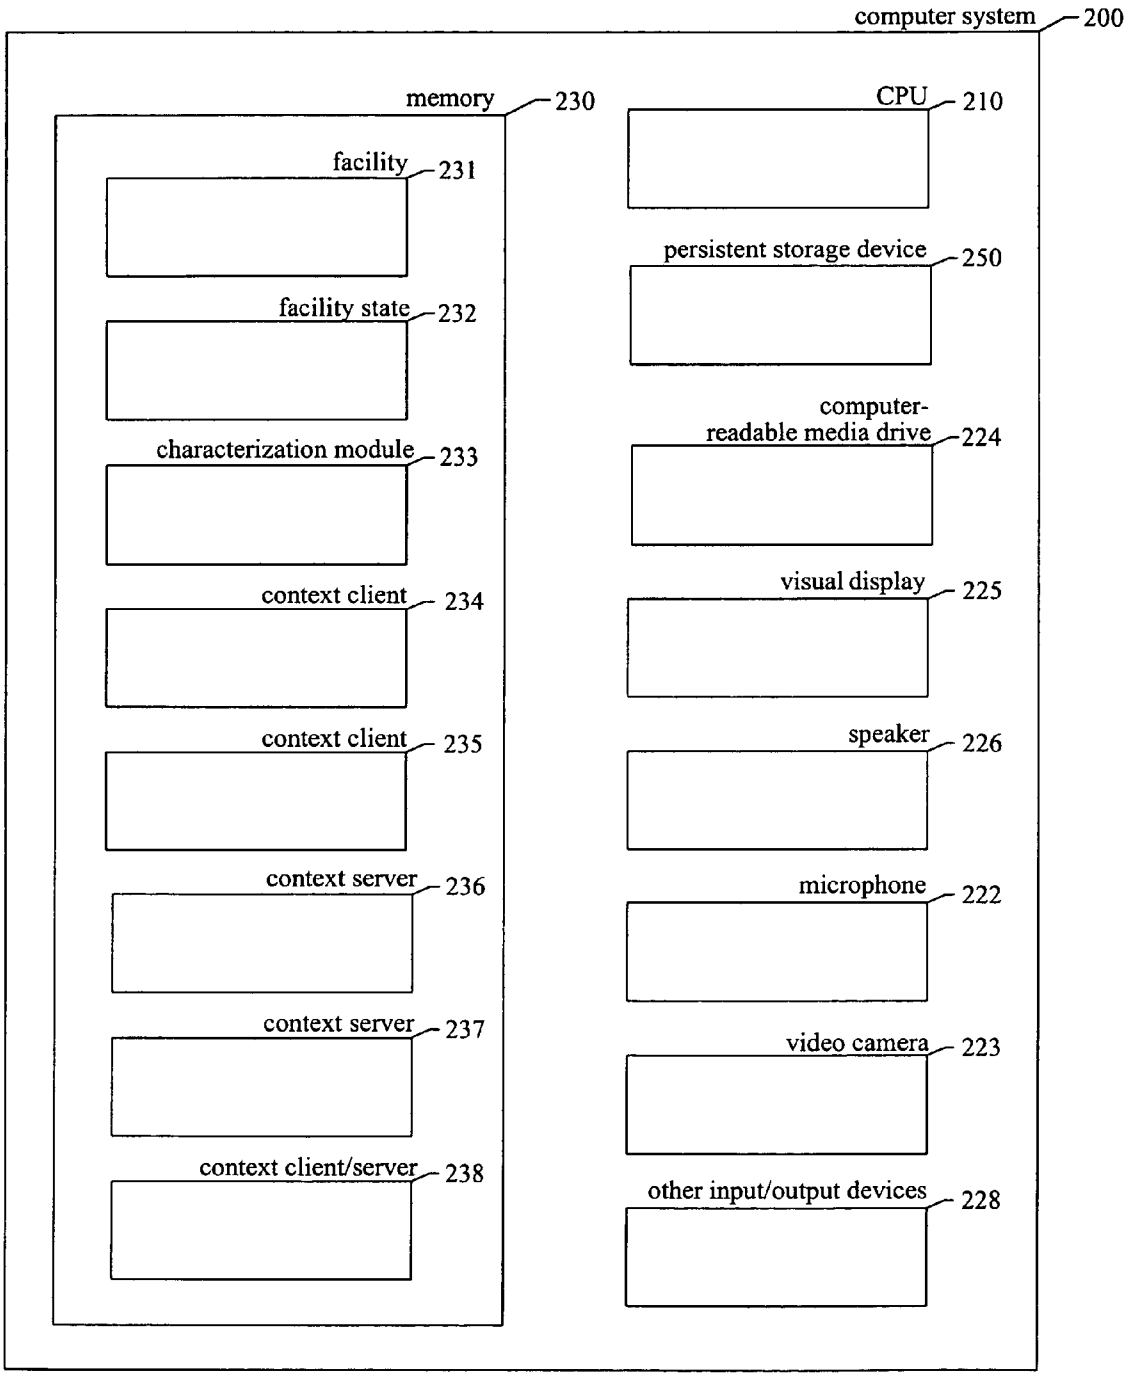
computer system 200
memory 230
facility 231
facility state 232
characterization module 233
context client 234
context client 235
context server 236
context server 237
context client/server 238
CPU 210
persistent storage device 250
computer-readable media drive 224
visual display 225
speaker 226
microphone 222
video camera 223
other input/output devices 228

Fig. 2

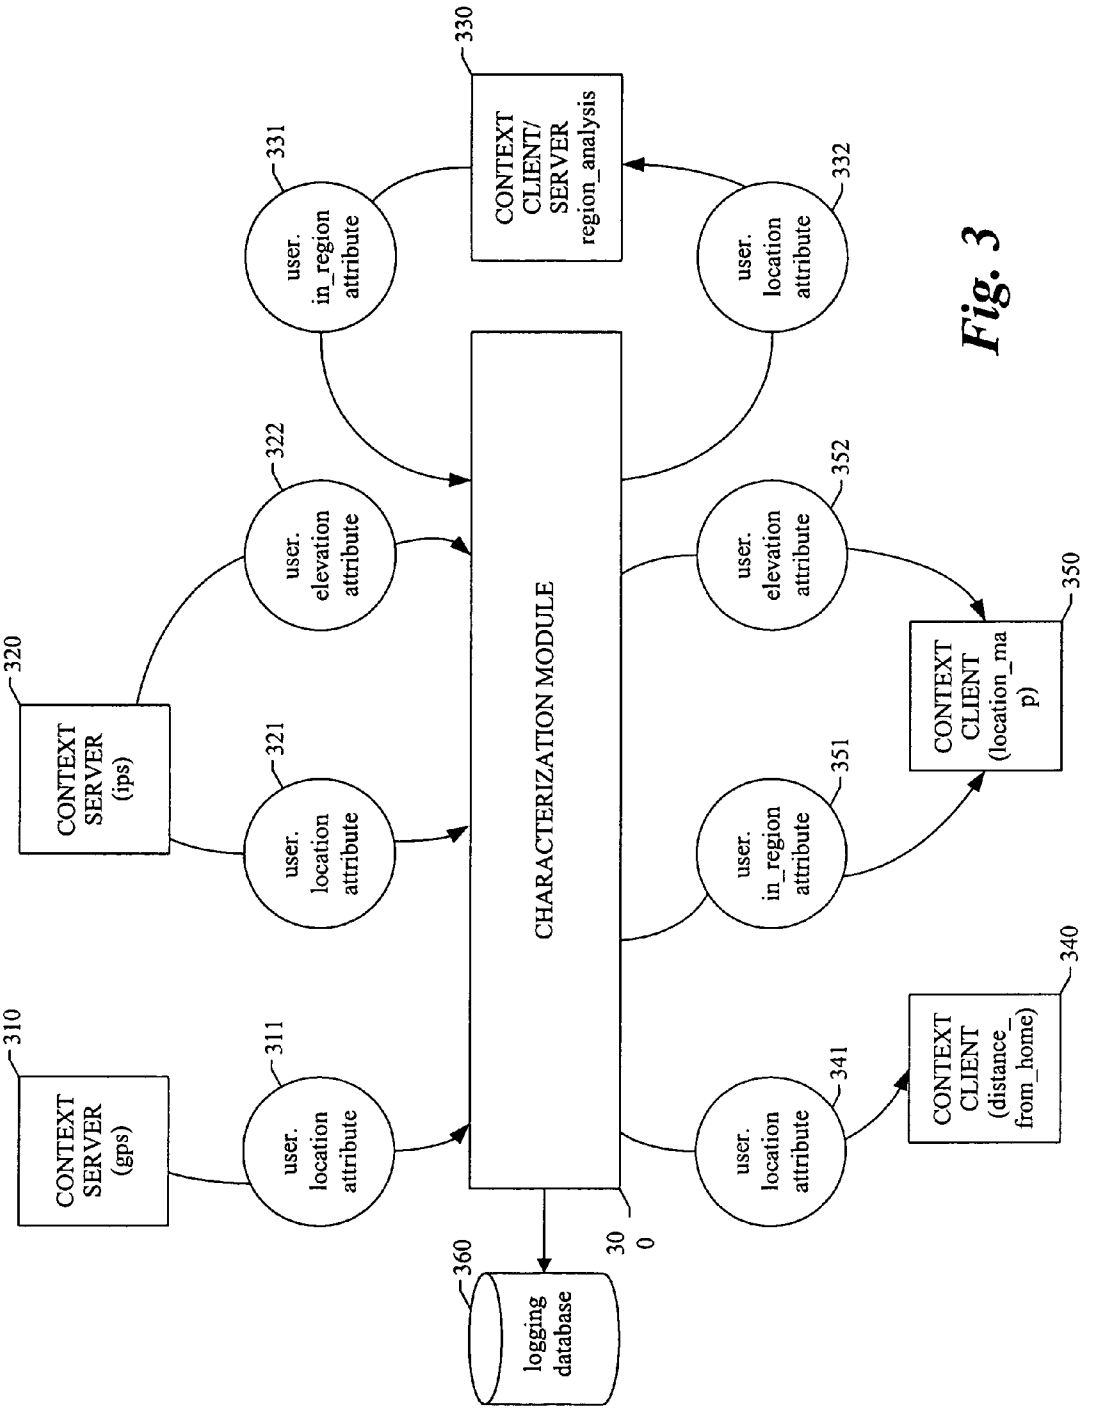
CONTEXT SERVER (gps)
310
user. location attribute
311
CONTEXT SERVER (ips)
320
user. location attribute
321
user. elevation attribute
322
user. in_region attribute
331
CONTEXT CLIENT/ SERVER region_analysis
330
user. location attribute
332
user. elevation attribute
352
user. in_region attribute
351
user. location attribute
341
CONTEXT CLIENT (distance_ from_home)
340
CONTEXT CLIENT (location_ma p)
350
CHARACTERIZATION MODULE
300
logging database
360

Fig. 3

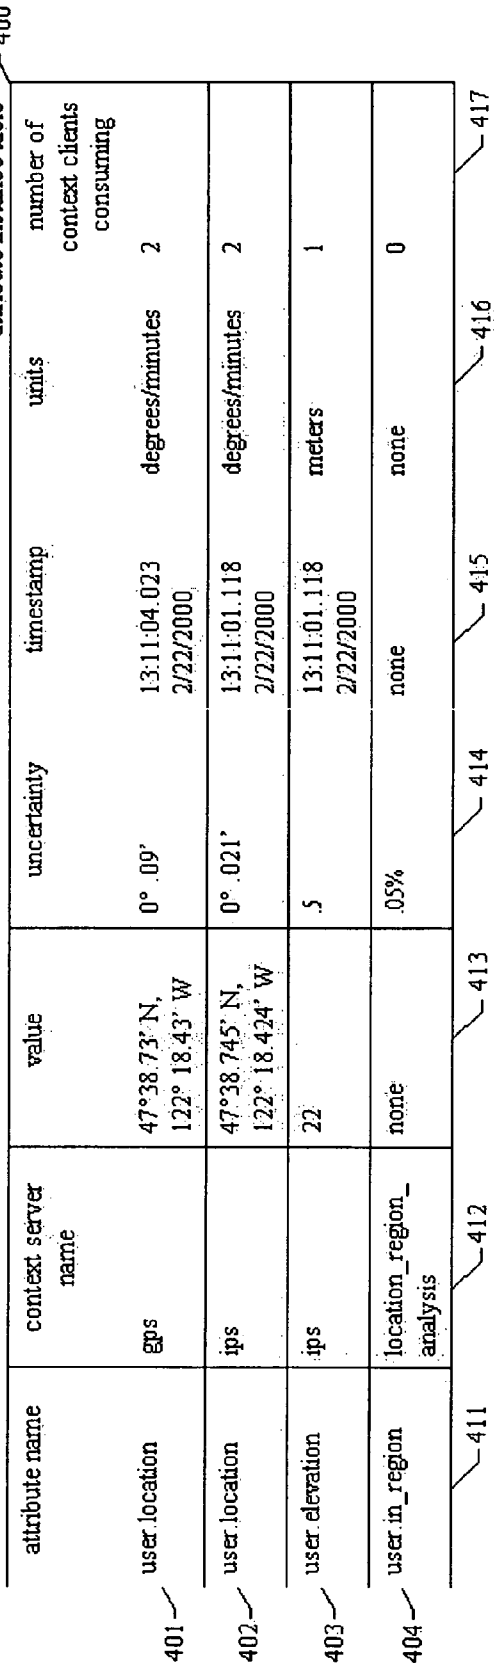
attribute instance table
400
attribute name
context server name
value
uncertainty
timestamp
units
number of context clients consuming
401
user location
gps
47°38.73' N, 122° 18.43' W
0° .09'
13:11:04.023 2/22/2000
degrees/minutes
2
402
user location
ips
47°38.745' N, 122° 18.424' W
0° .021'
13:11:01.118 2/22/2000
degrees/minutes
2
403
user elevation
ips
22
.5
13:11:01.118 2/22/2000
meters
1
404
user in_region
location_region_analysis
none
.05%
none
none
0
411
412
413
414
415
416
417

Fig. 4

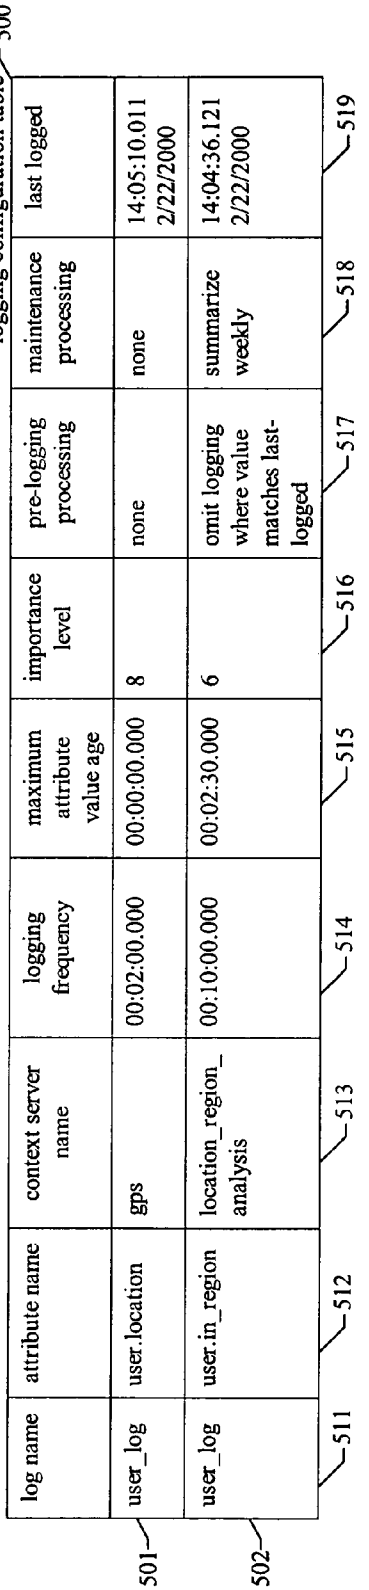
logging configuration table 500
log name
attribute name
context server name
logging frequency
maximum attribute value age
importance level
pre-logging processing
maintenance processing
last logged
user_log
user.location
gps
00:02:00.000
00:00:00.000
8
none
none
14:05:10.011 2/22/2000
user_log
user.in_region
location_region_analysis
00:10:00.000
00:02:30.000
6
omit logging where value matches last-logged
summarize weekly
14:04:36.121 2/22/2000
501
502
511
512
513
514
515
516
517
518
519

Fig. 5

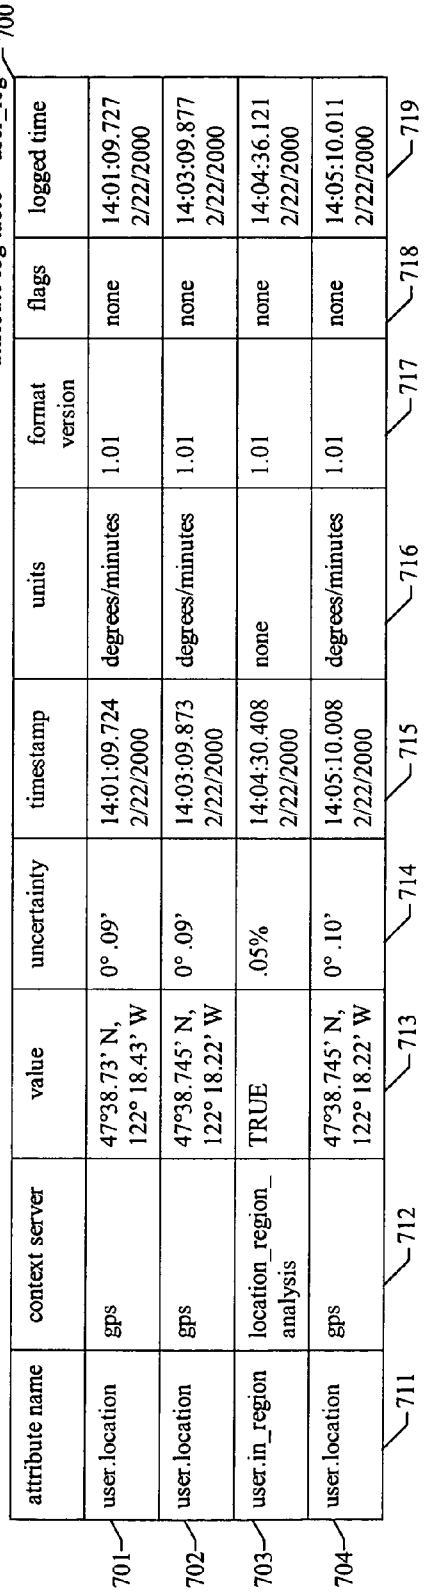
attribute log table -- user_log 700
attribute name
context server
value
uncertainty
timestamp
units
format version
flags
logged time
user.location
gps
47°38.73' N, 122° 18.43' W
0° .09'
14:01:09.724 2/22/2000
degrees/minutes
1.01
none
14:01:09.727 2/22/2000
user.location
gps
47°38.745' N, 122° 18.22' W
0° .09'
14:03:09.873 2/22/2000
degrees/minutes
1.01
none
14:03:09.877 2/22/2000
user.in_region
location_region_analysis
TRUE
.05%
14:04:30.408 2/22/2000
none
1.01
none
14:04:36.121 2/22/2000
user.location
gps
47°38.745' N, 122° 18.22' W
0° .10'
14:05:10.008 2/22/2000
degrees/minutes
1.01
none
14:05:10.011 2/22/2000
701
702
703
704
711
712
713
714
715
716
717
718
719

Fig. 7

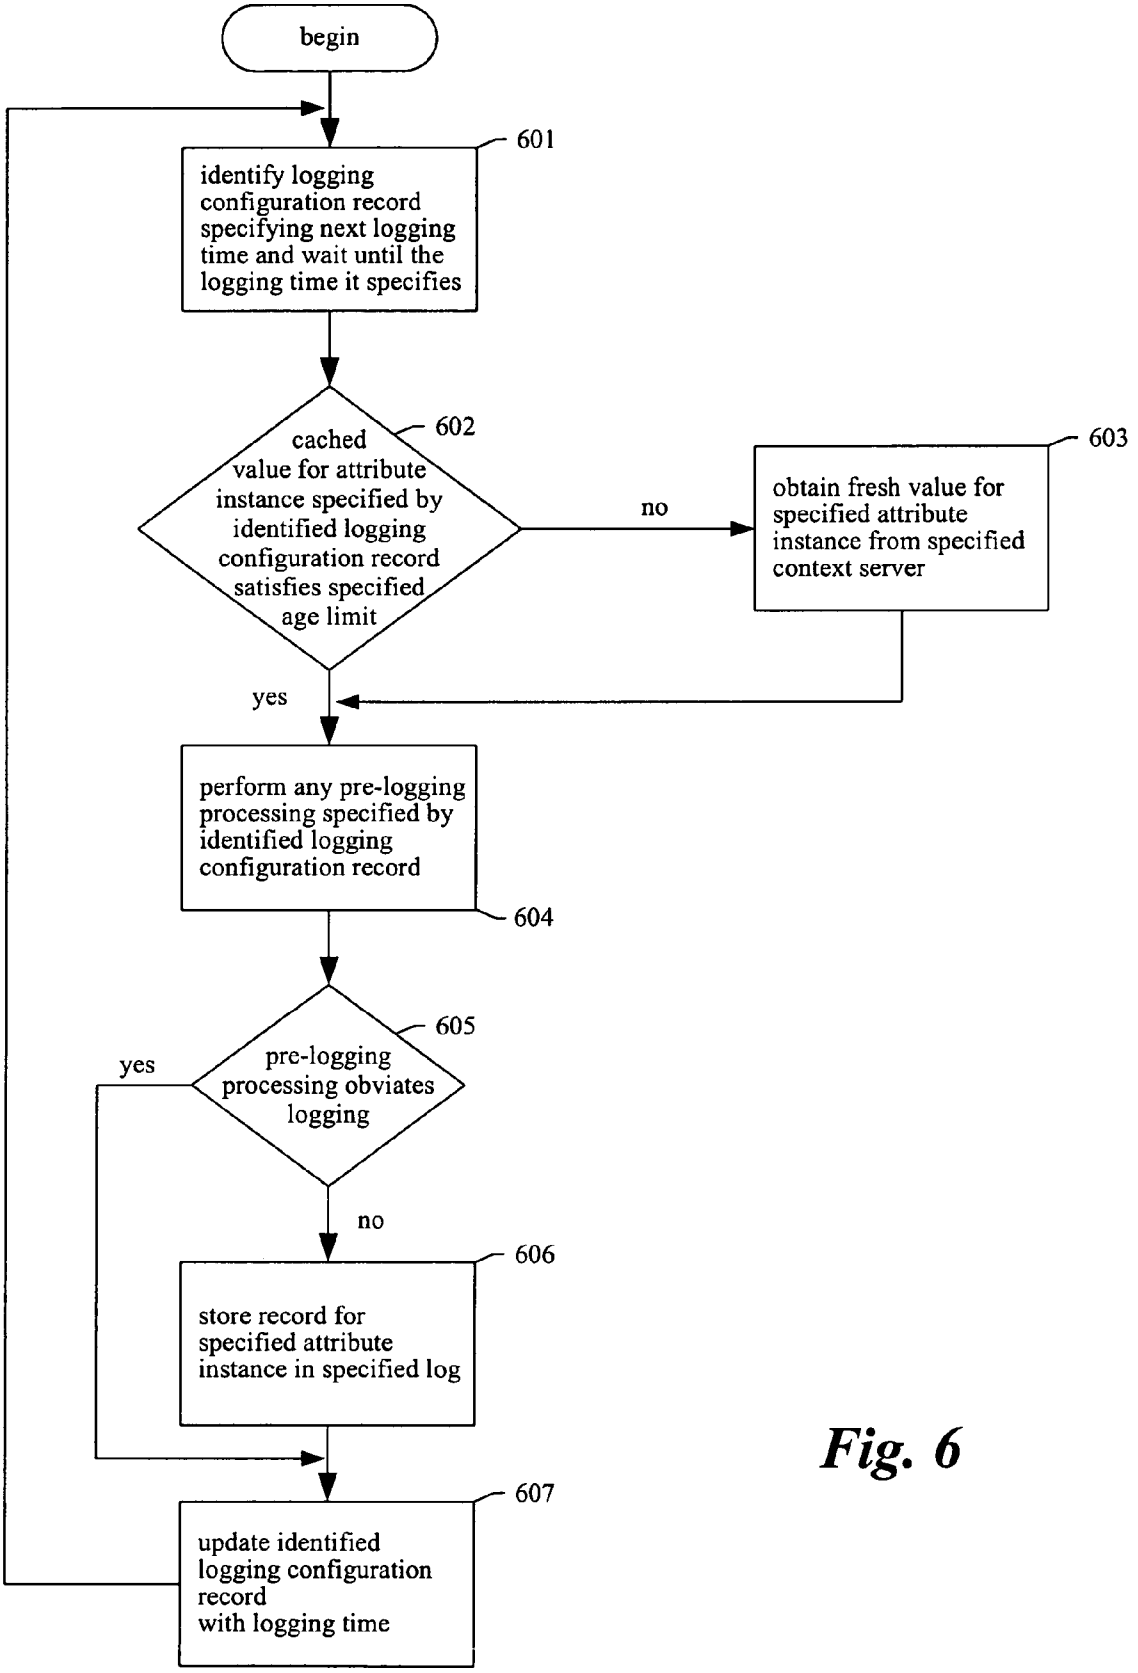
begin
601
identify logging configuration record specifying next logging time and wait until the logging time it specifies
602
cached value for attribute instance specified by identified logging configuration record satisfies specified age limit
no
603
obtain fresh value for specified attribute instance from specified context server
yes
perform any pre-logging processing specified by identified logging configuration record
604
605
pre-logging processing obviates logging
yes
no
606
store record for specified attribute instance in specified log
607
update identified logging configuration record with logging time

Fig. 6

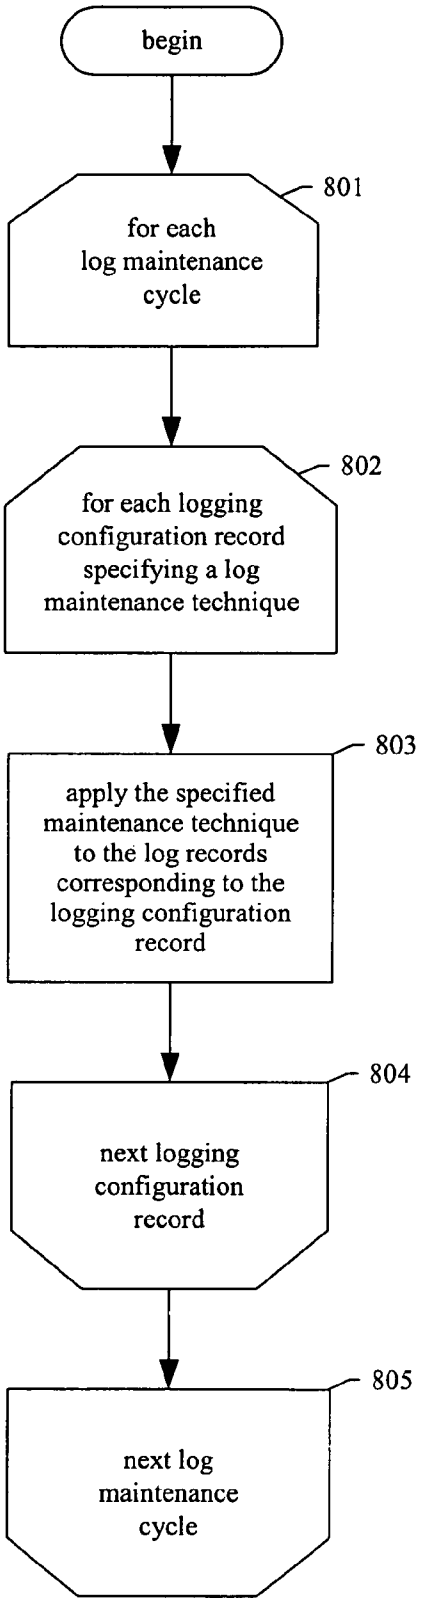
begin
801
for each log maintenance cycle
802
for each logging configuration record specifying a log maintenance technique
803
apply the specified maintenance technique to the log records corresponding to the logging configuration record
804
next logging configuration record
805
next log maintenance cycle

Fig. 8

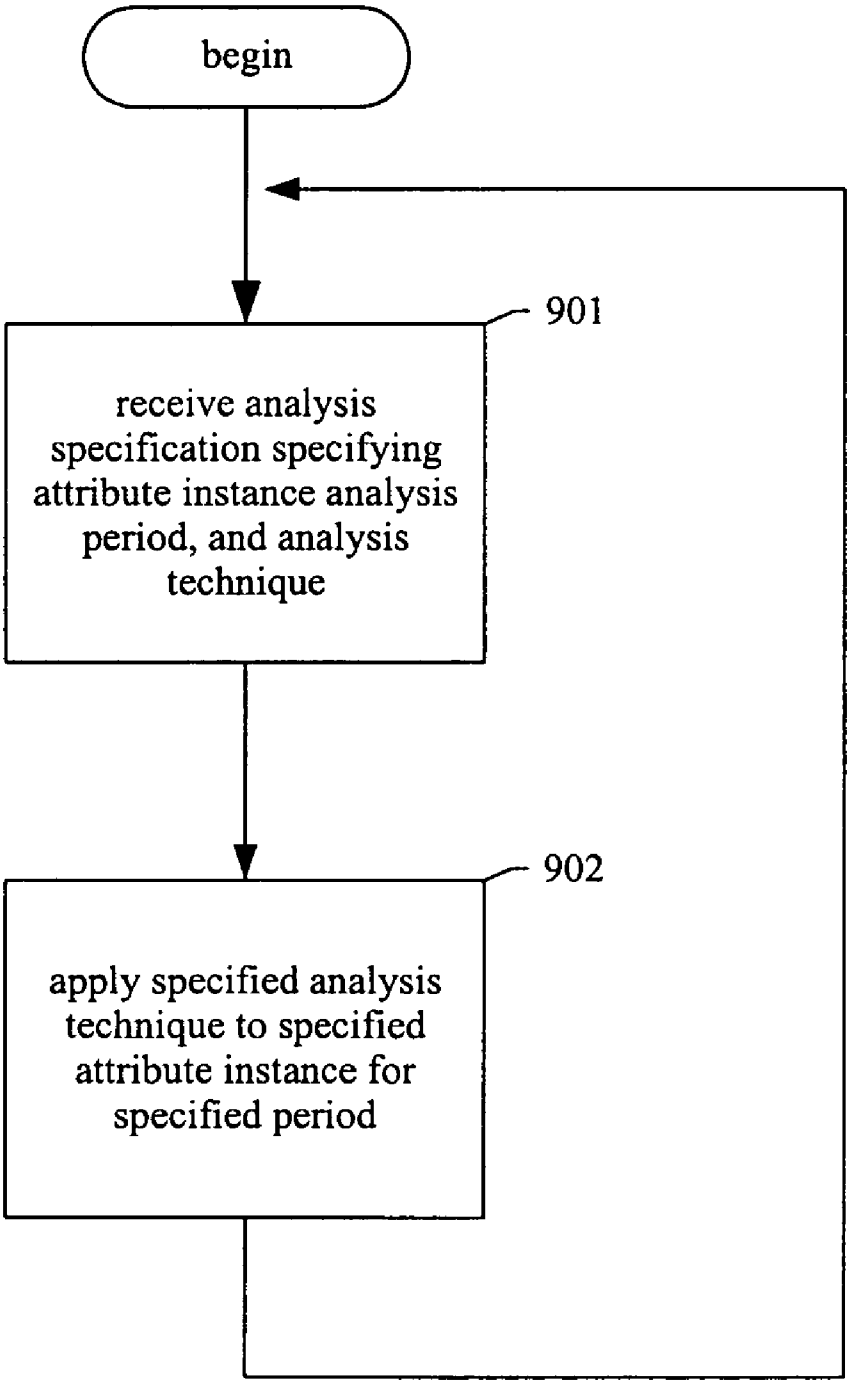
begin
901
receive analysis specification specifying attribute instance analysis period, and analysis technique
902
apply specified analysis technique to specified attribute instance for specified period

Fig. 9

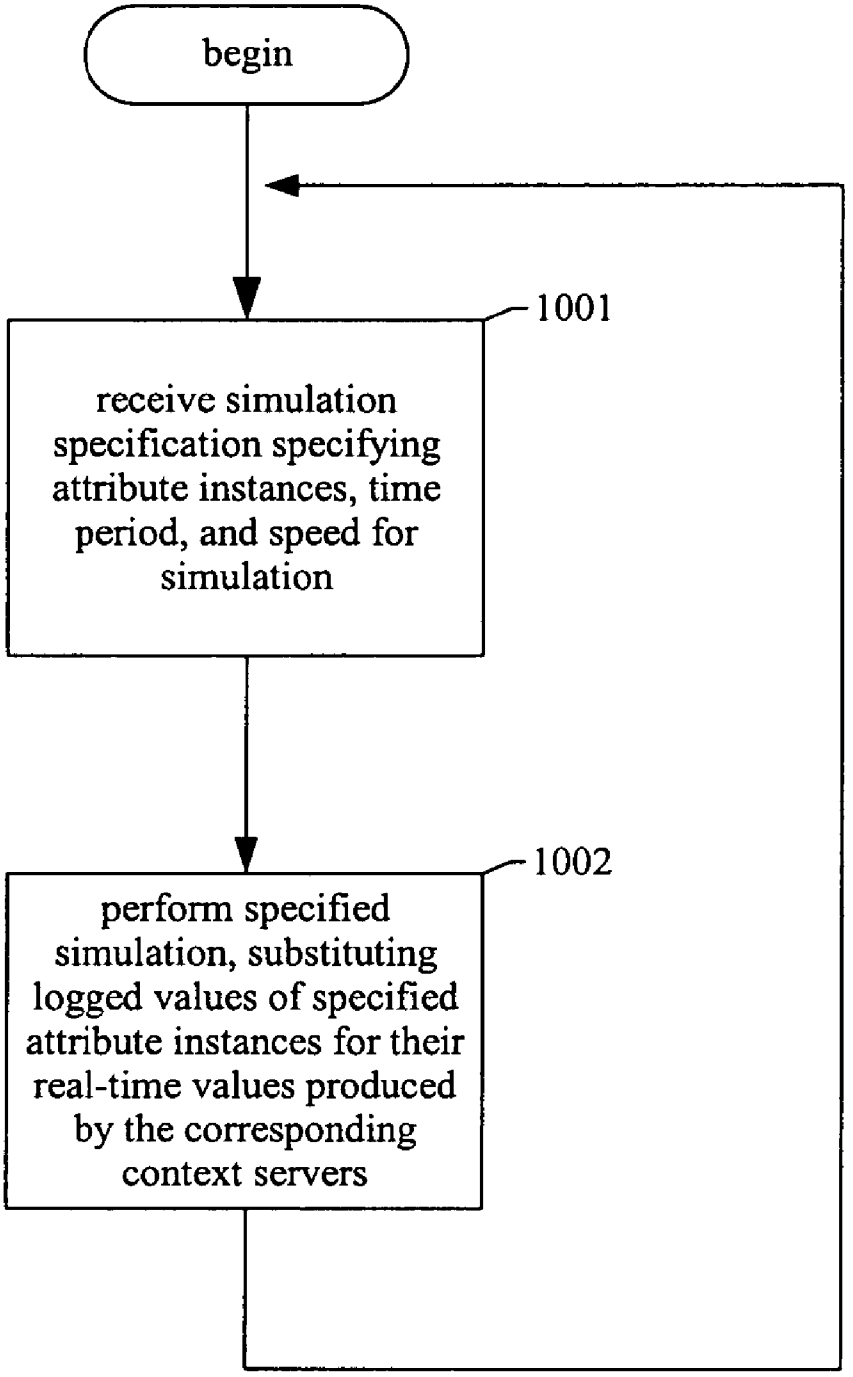
begin
1001
receive simulation specification specifying attribute instances, time period, and speed for simulation
1002
perform specified simulation, substituting logged values of specified attribute instances for their real-time values produced by the corresponding context servers

Fig. 10

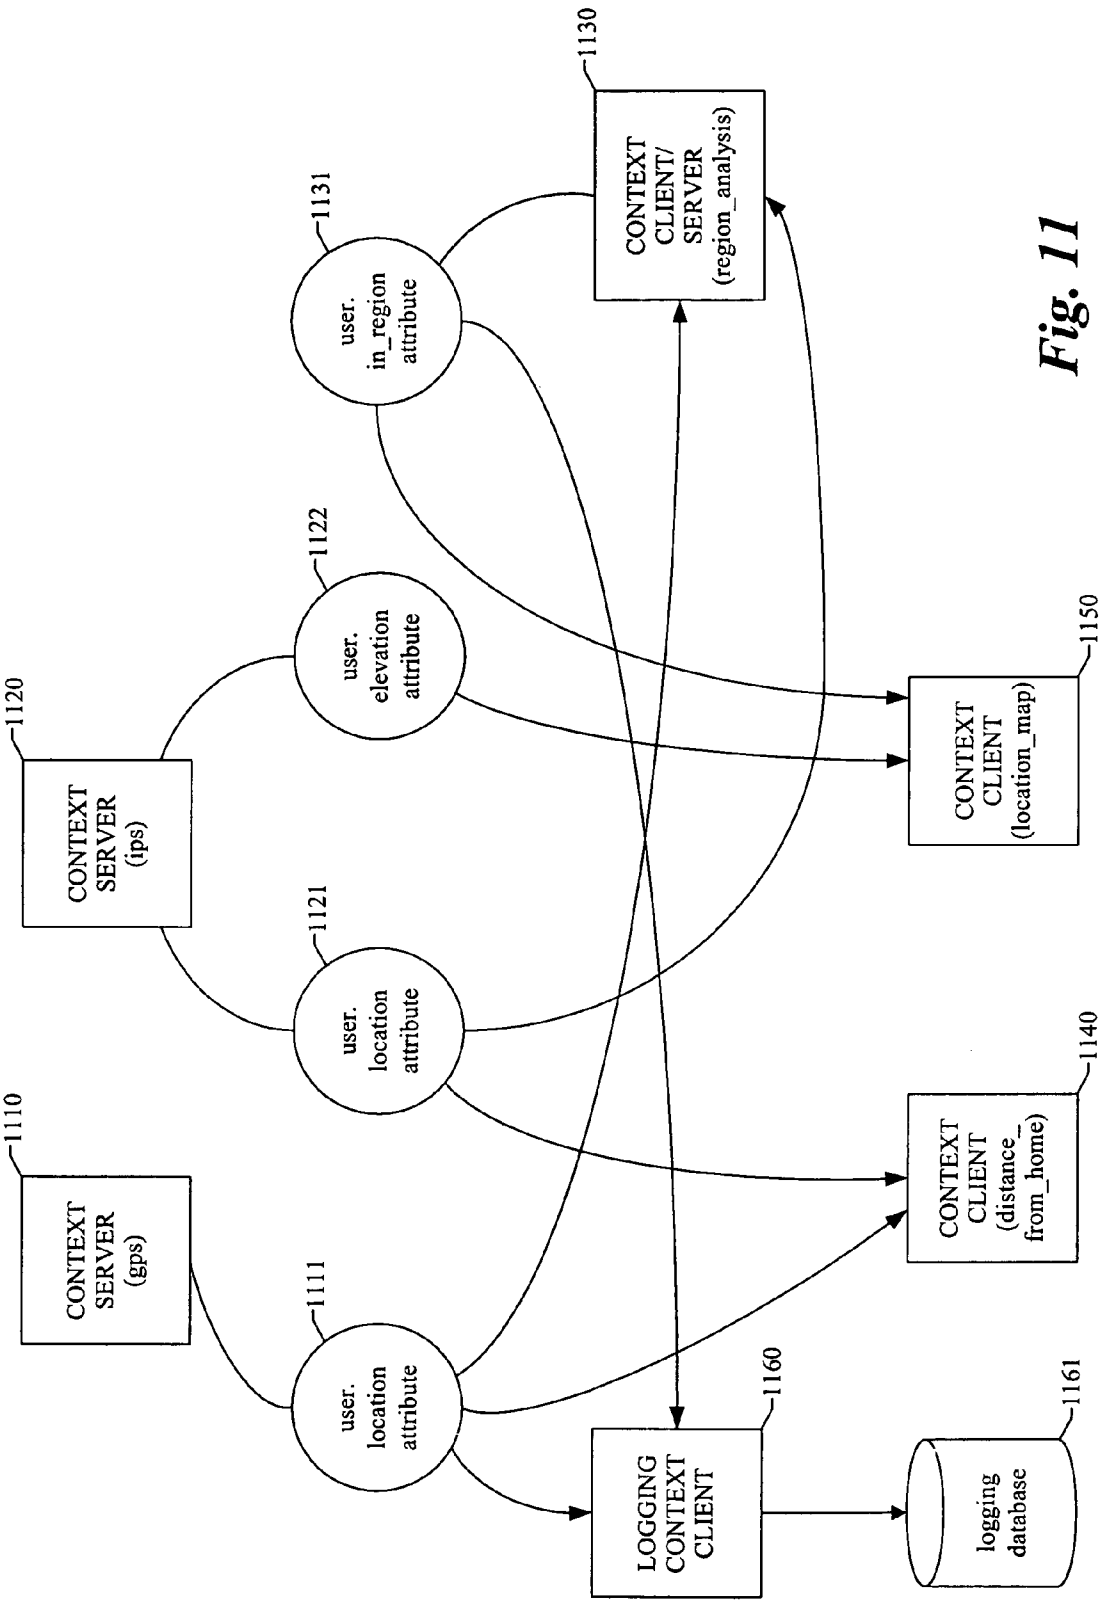
1110
CONTEXT SERVER (gps)
1120
CONTEXT SERVER (ips)
1111
user. location attribute
1121
user. location attribute
1122
user. elevation attribute
1131
user. in_region attribute
1130
CONTEXT CLIENT/ SERVER (region_analysis)
1150
CONTEXT CLIENT (location_map)
1140
CONTEXT CLIENT (distance_ from_home)
1160
LOGGING CONTEXT CLIENT
1161
logging database

Fig. 11

LOGGING AND ANALYZING CONTEXT ATTRIBUTES

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 09/541,326. U.S. patent application Ser. No. 09/541,326 is a continuation-in-part of U.S. patent application Ser. No. 09/216,193, entitled "Method And System For Controlling Presentation Of Information To A User Based On The User's Condition" and filed Dec. 18, 1998, and a continuation-in-part of U.S. patent application Ser. No. 09/464,659, entitled "Storing And Recalling Information To Augment Human Memories" and filed Dec. 15, 1999. Each of these three applications is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

The present invention is directed to the field of data storage and analysis, and, more particularly, to the field of storage and analysis of user context data, such as in a wearable personal computer.

BACKGROUND

Most general-purpose computer systems are designed to operate by processing commands as they are inputted. As a result, the only information such a computer system typically possesses about the condition of its user is the commands issued by the user. In particular, such a computer system generally only possesses this very limited type of information about the user's condition for the short time during which the computer system is processing the command.

A few special-purpose application programs that execute on general-purpose computer systems maintain a record of the commands issued by the user. For example, the Microsoft Internet Explorer and Netscape Navigator web browser applications accept commands to display particular web pages, and have a "history" feature that maintains and displays a list of web page requests made by the user. The history feature enables the user to review his or her web page requests, and to resubmit a web page request by selecting it from the list.

While such application history features can be useful, they are not extensively configurable, with respect to either the identity of the information that they record, the manner in which they record it, the manner in which they maintain it once recorded, or the nature of any later-performed analysis on the recorded information. Further, such history features are inherently limited to recording information in the possession of their host applications, and thus do not record other information such as the state of other applications, the operating system, or the computer system hardware. Such history features also fail to record information about the user, or about the environment surrounding the computer system and/or the user.

Accordingly, a facility in a general-purpose computer system for selectively recording, maintaining, and analyzing information about the computer system, a user, and/or their environment would have significant utility.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** illustrates an embodiment of the facility which executes on a general-purpose body-mounted wearable computer worn by a user.

FIG. **2** illustrates an exemplary computer system on which an embodiment of the facility is executing.

FIG. **3** is a data flow diagram showing a sample exchange of attributes performed by the characterization module.

FIG. **4** is a data structure diagram showing an attribute instance table in which the characterization module caches attribute instance values.

FIG. **5** is a data structure diagram showing a logging configuration table used by the facility to determine which attribute instances to log and when.

FIG. **6** is a flow diagram showing the steps preferably performed by the facility in order to log attribute instances.

FIG. **7** is a data structure diagram showing an attribute log table produced by the facility.

FIG. **8** is a flow diagram showing the steps preferably performed by the facility in order to maintain an attribute log.

FIG. **9** is a flow diagram showing the steps preferably performed by the facility to analyze log records for attribute instances.

FIG. **10** is a flow diagram showing the steps preferably performed by the facility in order to conduct a context simulation.

FIG. **11** is a data flow diagram showing the operation of the facility without a characterization module.

DETAILED DESCRIPTION

A software facility for recording, maintaining, and analyzing data regarding user context ("the facility") is provided. In a preferred embodiment, a characterization module operating in a computer system such as a wearable general-purpose computer system obtains context information, in the form of values for individual attributes each modeling an aspect of the wearable computer system, its user, or the surrounding environment, from one or more context servers, and provide it to one or more context clients that consume the context information. The facility, preferably implemented as part of the characterization module, periodically stores values of selected attributes obtained from context servers in a time-indexed log.

The log may be stored in a database, a sparse matrix, or a file of another type, on a storage device that is either local or remote with respect to the computer system. The identity of the logged attributes, as well as the frequency at which each is logged, is preferably configurable, either manually by the user, or by other programs executing on the computer system. The logged attributes are data gathered or derived to characterize the state of the computer system, its user, and the surrounding environment. The logged attributes may be very compact, such as a boolean value, or very voluminous, such as a color image.

The facility preferably further provides configurable pre-logging processing of logged attributes, such as determining whether data specified for logging should actually be logged, transforming data into a new form for logging, and/or combining data from different sources before logging it.

The facility preferably further provides configurable, selective maintenance of logged attribute data, enabling logged data to be compacted, abstracted, or otherwise further processed based on a variety of factors. This enables the facility to retain detailed, voluminous information for a short time, then process the information to reduce the volume of information that is retained for a longer time. In cases where the detailed information is interesting, such processing can be skipped or deferred to retain the detailed information.

The facility preferably further provides analysis of logged attribute data using later-defined analysis techniques. For

example, after data has been logged indicating that (1) a user was present in a particular location for a period of time, and that (2) the user thereafter moved away from that location at a particular direction and speed, an analysis technique could be defined and applied to this data to determine that the user waited for and embarked on a mode of transportation that takes on passengers at the logged location and moves in the logged direction at the logged speed.

Additional embodiments of the facility provide retrospective simulation of events represented in logged attribute data by substituting logged values of selected attributes for real-time attribute values in the attribute values provided to context clients by the characterization module. Such simulations may be conducted for a variety of purposes, including for training, to demonstrate how context clients perform in a particular situation, for usability texting, for debugging, or to repeat an experience represented by logged data. By modifying the logged data used in a simulation beforehand, the user can modify the represented experience. Indeed, completely new experiences may be presented to the user by manufacturing logged data that represent such new experiences.

In this way, the facility makes it possible to preserve, review, and analyze, and simulate historical context data. This enables programs executing on the computer system to make observations, and even judgments, in the present that are predicated on an understanding of events that occurred in the past, and to take initiative to assist the user on this basis. It also enables programs executing on the computer system to evaluate and understand in a retrospective context, rather than merely in an instantaneous context.

FIG. **1** illustrates an embodiment of the facility **100** which executes on a general-purpose body-mounted wearable computer **120** worn by a user **110**. Many wearable computers are designed to act as constant companions and intelligent assistants to a user, and are often strapped to a user's body or mounted in a holster. The computer system may also be incorporated in the user's clothing, be implanted in the user, follow the user, or otherwise remain in the user's presence. In one preferred embodiment the user is human, but in additional preferred embodiments, the user may be an animal, a robot, a car, a bus, or another entity whose context is to be logged. Indeed, the computer system may have no identifiable user, but rather operate as an independent probe, logging and/or reporting on the context in an arbitrary location.

The wearable computer **120** has a variety of user-worn user input devices including a microphone **124**, a hand-held flat panel display **130** with character recognition capabilities, and various other user input devices **122**. Similarly, the computer has a variety of user-worn output devices that include the hand-held flat panel display, an earpiece speaker **132**, an eyeglass-mounted display **134**, and a tactile display **136**. In addition to the various user-worn user input devices, the computer can also receive information from various user sensor input devices **116** and from environment sensor input devices **128**, including video camera **121**. The characterization module can receive and process the various input information received by the computer, such as from context servers that process the input information and generate attribute values, and can present information to the user on the various output devices accessible to the computer.

In the current environment, computer **120** is accessible to a computer **150** (e.g., by being in wireless proximity or by being reachable via a long-distance communication device such as a cellular phone) which also has a variety of input and output devices. In the illustrated embodiment the computer **150** is non-portable, although the body-mounted computer of the user can similarly communicate with a variety of other types of computers, including body-mounted computers of other users. The devices from which the non-portable computer can directly receive information include various user input devices **152** and various user sensor input devices **156**. The non-portable computer can output information directly to a display **160**, a speaker **162**, an olfactory device **164**, and a printer **166**. In the illustrated embodiment, the body-mounted computer can communicate with the non-portable computer via a wireless transmission medium. In this manner, the characterization module can receive information from the user input devices **152** and the user sensor devices **156** after the information has been transmitted to the non-portable computer and then to the body-mounted computer. Alternately, the body-mounted computer may be able to directly communicate with the user input devices **152** and the user sensor devices **156**, as well as with other various remote environment sensor input devices **158**, without the intervention of the non-portable computer **150**. Similarly, the body-mounted computer may be able to supply output information to the display **160**, the speaker **162**, the olfactory device **164**, and the printer **166**, either directly or via the non-portable computer, and directly to the telephone **168**. As the user moves out of range of the remote input and output devices, the characterization module will be updated to reflect that the remote devices are not currently available.

The various input devices allow the characterization module or an application such as a context server (not shown) executing on the computer system **120** to monitor the user and the environment and to model their current condition. Such a model can be used by various applications, such as context clients, for various purposes. A model of the current conditions can include a variety of condition variables that represent information about the user, the computer, and the user's environment at varying levels of abstraction. For example, information about the user at a low level of abstraction can include raw physiological data (e.g., heart rate and EKG) and geographic information (e.g., location and speed), while higher levels of abstraction may attempt to characterize or predict the user's physical activity (e.g., jogging or talking on a phone), emotional state (e.g., angry or puzzled), desired output behavior for different types of information (e.g., to present private family information so that it is perceivable only to myself and my family members), and cognitive load (i.e., the amount of attention required for the user's current activities). Background information which changes rarely or not at all can also be included, such as the user's age, gender and visual acuity. The model can similarly hold environment information at a low level of abstraction, such as air temperature or raw data from a motion sensor, or at higher levels of abstraction, such as the number and identities of nearby people, objects, and locations. The model of the current conditions can additionally include information added explicitly from other sources (e.g., application programs), as well as user-specified or system-learned defaults and preference information.

Those skilled in the art will appreciate that computer systems **120** and **150**, as well as their various input and output devices, are merely illustrative and are not intended to limit the scope of the present invention. The computer systems may contain additional components or may lack some illustrated components. For example, it is possible that the characterization module can be implemented on the non-portable computer, with the body-mounted computer replaced by a thin context client such as a transmitter/receiver for relaying information between the body-mounted input and output devices and the non-portable computer. Alternately, the user may not wear any devices or computers.

In addition, the body-mounted computer may be connected to one or more networks of other devices through wired or wireless communication means (e.g., wireless RF, a cellular phone or modem, infrared, physical cable, a docking station, etc.), either with or without support from other computers such as the computer **150**. For example, the body-mounted computer of a user can make use of output devices in a smart room, such as a television and stereo when the user is at home, if the body-mounted computer can transmit information to those devices via a wireless or wired medium or if a cabled or docking mechanism is available. Alternately, kiosks or other information devices can be installed at various locations (e.g., in airports or at tourist spots) to transmit relevant information to body-mounted computers within the range of the information device.

Those skilled in the art will also appreciate that specialized versions of the body-mounted computer and characterization module can be created for a variety of purposes.

FIG. **2** illustrates an exemplary computer system **200** on which an embodiment of the facility is executing. The computer includes a memory **230**, a CPU **210**, a persistent storage device **250** such as a hard drive, and input/output devices including a microphone **222**, a video camera **223**, a computer-readable media drive **224**, such as a CD-ROM drive, a visual display **225**, a speaker **226**, and other devices **228**. The memory preferably contains the facility **231**, as well as information reflecting the current state of the facility (facility state) **232**. The memory further contains characterization module **233**, software modules **234**, **235**, and **238** that consume attributes and are therefore context clients, and software modules **236**, **237**, and **238** which provide attributes and are therefore context servers. While items **231-238** are preferably stored in memory while being used, those skilled in the art will appreciate that these items, or portions of them, can be transferred between memory and the persistent storage device for purposes of memory management and data integrity.

Attributes represent measures of specific context elements such as ambient temperature, location and current user task. Each attribute preferably has the following properties: a name, a value, an uncertainty level, units, and a time stamp. Attributes provided through the characterization module by a context server may either be "measured," in that they are directly received from an input device, or "derived," in that they are the result of performing processing on values directly obtained from input devices other attributes. Indeed, a derived attribute may be produced by performing additional processing on other derived attributes. Context servers, in addition to providing attributes through the characterization module, may also provide other functions. For example, an application, such as an electronic mail application, may serve as a context server by providing attributes through the characterization module. In addition to the source of attributes described above, such an "expanded" context server may provide attributes relating to the other functions of the expanded context server. For example, an electronic mail application context server could provide an attribute indicating other new messages are waiting. Indeed, the same program module may operate both as a context client and a context server.

Two or more different context servers may preferably supply to the characterization module their own values for a single attribute. For example, a first context server can supply a value for a user.location attribute based on data received from a global positioning system device, while a second context server can supply a value for the user.location attribute based on data received from an indoor positioning device. These alternate values for the same attribute provided by different context servers are referred to as separate "instances" of the attribute. Separate instances of an attribute provided by different context servers may be based on data obtained from the same sensor, or may be based on data obtained from different sensors. The characterization module preferably provides a variety of different approaches, called "mediators," for determining, when an attribute requested by a context client has more than one instance, what attribute value to provide in response to the attribute request.

When the characterization module obtains an attribute value from a context server, it preferably caches it for responding to future requests for the attribute from context clients. Such attribute requests may specify a specific instance of the attribute—that is, a specific context server from which the attribute is to be obtained—or may specify that the attribute is to be obtained by applying a particular mediator to whatever instances of the attribute are available, or may utilize a default mediator to mediate between available instances of the attribute. When the characterization module receives an attribute request from a context client, it identifies the attribute instances available to satisfy the request, and, for each, determines whether the value for the attribute instance cached by the characterization module was obtained sufficiently recently from the corresponding context server. If not, the characterization module requests an updated value for the attribute instance from the corresponding context server before performing any necessary mediation and returning a value to the context client.

The facility preferably supports the collaborative logging, in which attribute values produced in multiple computer systems are logged in a single consolidating computer system and there analyzed, or in which values logged in multiple computer systems are maintained, analyzed, or simulationed in a single consolidating computer system. Such collaborative logging is valuable where multiple computer systems are collecting and processing information about the same general subject. For example, information about a military battle collected and processed by separate computer systems carried by each of a number of soldiers may preferably by consolidated and analyzed by the facility in a strategist's computer system.

The characterization module preferably utilizes a plain-language, hierarchical, taxonometric attribute nomenclature to name attributes. The attribute names within the nomenclature are preferably specific so that there is no ambiguity as to what they represent. The characterization module preferably supports the extension of the nomenclature by adding new attribute names that conform to the hierarchical taxonomy of the nomenclature. The nomenclature preferably has attribute names relating to the user, such as user.position, user.speed, and user.direction, providing information about the user's position, speed, and direction, respectively. The nomenclature preferably contains attribute names for various user moods, or "affect," such as user.mood.happiness, user.mood.anger, and user.mood.confusion. The nomenclature preferably includes attribute names for user activities, such as user.activity.driving, user.activity.eating, and user.activity.sleeping. The nomenclature preferably includes attribute names for user physiology values, such as user.physiology.pulse, user.physiology.body_temperature, and user.physiology.blood_pressure. The nomenclature preferably includes attribute names for similar attributes of people other than the user, such as person.John_Smith.mood.happiness. The nomenclature preferably includes attribute names for aspects of the computer system or "platform." For example, the nomenclature preferably includes attribute names for aspects of the platform's user interface, such as platform.user_inter-

face.oral_input_device_availability and platform.user_interface.visual_output_device_availability. The nomenclature preferably includes attribute names for attributes relating to the central processing unit, or "CPU," of the platform, such as platform.cpu_load and platform.clock_speed. The nomenclature preferably also provides attribute names for aspects of the local environment, such as environment.local.time, environment.local.temperature, and environment.local.ambient_noise_level. The nomenclature preferably also includes attribute names for remote environments, such as environment.place.chicago.time and environment.place.san_diego.temperature. The nomenclature preferably further provides attribute names relating to specific applications. For example, the nomenclature preferably provides attribute names for aspects of an electronic mail application, such as application.mail.available, application.mail.new_messages_waiting, and application.mail.messages_waiting_to_be_sent. The nomenclature preferably further provides attribute names relating to data stored in or accessible to the computer system. The nomenclature preferably further provides attribute names relating to the connectivity of the computer system to other computer systems and similar devices, such as such as connectivity.Internet.available and connectivity.Internet.speed.

A single attribute may preferably be referred to by two or more names in the nomenclature. For example, the attribute names person.John_Smith.mood.happiness and user.mood.happiness may refer to the same attributes in a computer system whose user is John Smith.

In this manner, the attribute nomenclature used by the characterization module provides effective names for attributes relating to the user, the computer system, and the environment. Additional detail on the attribute nomenclature utilized by the facility is provided in U.S. patent application Ser. No. 09/724,902, entitled "Dynamically Exchanging Computer User's Context," which is hereby incorporated by reference in its entirety.

Additional embodiments of the facility preferably identify attributes in a variety of ways other than the plain-language, hierarchical, taxonometric attribute nomenclature discussed above. For example, attributes may be identified by arbitrary identifiers, or by the identity of associated events or messages.

Additional details of the operation of the characterization module to obtain attribute values from context servers is provided by U.S. Pat. No. 6,920,616 entitled "Interface for Exchanging Context Data", which is hereby incorporated by reference in its entirety.

FIG. **3** is a data flow diagram showing a sample exchange of attributes performed by the characterization module. The diagram shows characterization module **300**, as well as five other software modules, **310**, **320**, **330**, **340**, and **350**. Software modules **310**, **320**, and **330** are said to be context servers, in that they provide attributes to the characterization module. For example, context server **330** provides an user.in_region attribute **331**. It can be seen that context servers may provide more than one attribute. For example, context server **320** provides a user.location attribute **321** and an user.elevation attribute **322**. It can further be seen that a single attribute may be provided by more than one context server. For example, context server **310** provides user.location attribute **311**, while context server **320** provides user.location attribute **321**.

The diagram further shows the facility storing attribute instance values obtained from context servers by the characterization modules in a logging database **360** that is comprised of one or more attribute instance logs.

FIG. **4** is a data structure diagram showing an attribute instance table in which the characterization module caches attribute instance values. The attribute instance table contains a row for each attribute instance created by a context server. The attribute instance table **400** contains rows **401**-**404**, each corresponding to a different attribute instance. Each of these rows contains the following fields: an attribute name field **411** containing the name of the attribute, a context server name field **412** identifying the context server that created the attribute instance, a value field **413** containing the value of the attribute last provided by the context server, and uncertainty field **414** identifying the level of uncertainty of the value, a timestamp **415** indicating the time at which the value is effective, a units field **416** identifying the units for the value and the uncertainty, and an indication **417** of the number of context clients consuming the attribute instance. For example, row **401** indicates that an instance of the user.location attribute from the gps context server has the effective time of 13:11:04.023 on 2/22/2000. Its value is 47° 36.73' N, 122° 18.43' W degrees and minutes, with an uncertainty of 0° 0.09'. It further indicates that two context clients are presently consuming this attribute instance. It should be noted, as shown, the user's location, expressed in terms of latitude and longitude, is maintained in a single attribute. In alternative embodiments, such a location could be maintained in a larger number of attributes. For example, rather than being maintained in a single user.location attribute, such a location could be distributed across four separate attributes: user.location.latitude.degrees, user.location.latitude.minutes, user.location.longitude.degrees, and user.location.longitude.minutes. The characterization module preferably adds row **404** to the attribute instance table when the location_region_analysis context server calls the CreateAttributeInstance function for the user.in_region attribute.

FIG. **5** is a data structure diagram showing a logging configuration table used by the facility to determine which attribute instances to log and when. The information stored in the logging configuration table may be provided by a variety of sources, including the user, the facility, applications, and other programs running on the computer system. In particular, the facility or another program may dynamically determine that a particular attribute instance should be logged, and accordingly add a logging configuration record to the logging configuration table. For example, a program may determine that an altitude parameter should be logged when it observes that the user's location corresponds to the location of a helipad.

The logging configuration table **500** has two rows **501** and **502**. Each row corresponds to a particular attribute instance and specifies details of how that attribute instance is to be logged. Each row preferably contains a log name field **511** naming the logging which values of the attribute instance are to be stored; an attribute name field identifying the attribute name of the attribute instance to be logged; a context server name field **513** identifying the context server that is the source of the attribute instance to be logged; a logging frequency field **514** indicating the interval at which the attribute instance is to be logged; a maximum attribute value age field **515** indicating the maximum age of a cache value of the attribute instance that may be logged; an importance level field **516** indicating the importance of maintaining logged data for the attribute instance; a pre-logging processing field **517** indicating any processing to be performed on the attribute instance before storing in the log; a maintenance processing field **518** indicating any maintenance processing to be performed on log values of the attribute instance while they are stored in the

log; and a last logged field **519** indicating the time at which the attribute instance was most recently logged.

For instance, row **502** indicates that the instance of the user.in_region attribute supplied by the location_region_analysis context server is to be logged in the user_log log. While only one unique log name is shown in the logging configuration table, the use of the log name field enables the facility to log different attribute instances in different logs, for instance, when the attribute instances relate to different subjects, or where the information contained in the attribute instances belongs to different entities. Row **502** further indicates that this attribute instance is to be logged every ten minutes, and that a cached value for this attribute instance may be logged, rather than obtaining a fresh value from the context server, if the effective time of the cached value is less than 30 seconds before the logging time. Row **502** further indicates that the importance level of maintaining log data for this attribute instance is six, an intermediate importance level. A high importance level may preferably be attributed to a particular attribute based on such factors as whether logging the attribute is legally required or required by a business policy, or whether the attribute has implications for the user's safety. Row **502** further indicates that logging of this attribute instance should be omitted where the current value of the attribute instance matches the last-logged value of the attribute instance. In contrast, because row **501** specifies a maximum attribute value age of 00:00:00.000, the facility must request a fresh value for the instance of the user.location attribute obtained from the GPS context server each time the attribute instance is to be logged. Row **502** indicates that the logged information for this attribute instance is to be summarized weekly, for example, by removing the rows from the log that indicate that the value of this attribute instance has changed during the previous week, and replacing them with a single row indicating the total number of times that the value of this attribute instance changed during the week. Other summarization techniques may summarize the number of times that the user was at each of a number of common locations, such as work, home, and health club. Row **502** further indicates that this attribute instance was last logged at 14:04:36.121 on 2/22/2000. Based on the contents of fields **514** and **519**, this attribute instance is scheduled to be next logged at 14:14:36.121 on 2/22/2000.

FIG. **6** is a flow diagram showing the steps preferably performed by the facility in order to log attribute instances. In step **601**, the facility identifies the logging configuration record specifying the next logging time. By examining FIG. **5**, it can be determined that the logging configuration record shown in row **501** has the next logging time, which is 14:07:10.011 on 2/22/2000. In step **601**, the facility further waits until this next logging time arrives. In step **602**, if the value cached in the characterization module for the attribute instance specified by the logging configuration record identified in step **601** satisfies the maximum attribute value age limit specified by this logging configuration record, then the facility continues in step **604**, else the facility continues in step **603**. In step **603**, the facility uses the characterization module to obtain a fresh value of the specified attribute instance from the specified context server. For example, the facility uses the characterization module to obtain a fresh value of the user.location attribute from the GPS context server. In a further preferred embodiment, the facility in steps **602-603** may use a characterization module operating in a different computer system to obtain a value for the logged attribute instance. That is, the facility may log attributes obtained in computer systems other than the one in which the facility is executing.

After step **603**, the facility continues in step **604**. In step **604**, the facility performs any pre-logging processing specified by the identified logging configuration record. Examples of pre-logging processing techniques preferably supported by the facility include summarization, in which several values of one attribute instance, or values of a number of different attribute instances are summarized in a single log record; abstraction, in which the value of one or more attribute instances, are abstracted into a higher-level conceptualization; and compression, in which information to be stored in the log record is modified to fit in a smaller space.

In step **605**, if the pre-logging processing performed in step **604** obviates the current logging iteration, then the facility continues in step **607** to abort the current logging iteration, else the facility continues in step **606**. In step **606**, the facility stores a record for the specified attribute instance in the specified log. Those skilled in the art will appreciate that the facility may be straightforwardly adapted to support additional techniques of a similar nature. To maximize the accessibility of the data stored in the log, the log record is preferably stored as tab-delimited ASCII text or another widely-supported format. The contents of a stored log record are discussed further in conjunction with FIG. **7** below. After step **606**, the facility continues in step **607**. In step **607**, the facility updates the last logged field of the logging configuration record with the current time. After step **607**, the facility continues in step **601** to identify the logging configuration record specifying the next logging time.

FIG. **7** is a data structure diagram showing an attribute log table produced by the facility. The attribute log table **700** contains rows **701-704**, each corresponding to a single logged value of an attribute instance. Each row contains an attribute name field **711** indicating the attribute name of the logged attribute instance; a context field server field **712** identifying the context server from which the attribute instance is obtained; a value field **713** containing the logged value for the attribute instance; an uncertainty field **714** indicating the level of uncertainty of the logged value; a time-stamp field **715** indicating the effective time at which the logged value was most accurate; a units field **716** indicating the units in which the value and uncertainty are expressed; a format version field **717** indicating the version of the format in which the value and uncertainty are expressed; a flags field **718** containing additional information about the logged attribute instance; and a logged time field **719** indicating the time at which the value of the attribute instance was logged.

For example, it can be seen from row **704** that the most recently-logged attribute instance is the instance of the user location attribute provided by the GPS context server. The logged value of this attribute instance is 47° 38.72' N, 122° 18.22' W, with an uncertainty of 0°.10'. This attribute instance value has an effective time of 14:05:10.008 on 2/22/2000. The value and uncertainty are expressed in the units of degrees and minutes, the format version is 1.01, and there are no flags stored for attribute instance value. This attribute log record was generated at 14:05:10.011 on 2/22/2000.

FIG. **8** is a flow diagram showing the steps preferably performed by the facility in order to maintain an attribute log. In steps **801-805**, the facility loops through each attribute log maintenance cycle. Those skilled in the art will appreciate that the facility could be configured to perform attribute log maintenance cycles at a variety of frequencies, such as every hour, every day, or every month. In steps **802-804**, the facility loops through each log configuration record that specifies a maintenance technique in the maintenance processing field **518**. In step **803**, the facility applies the specified maintenance technique to the log records corresponding to the logging

configuration record, which may include log records stored in multiple logs and/or in multiple locations. Examples of maintenance techniques preferably supported by the facility include compression, summarization and abstraction, discussed above; thinning, in which some log records for an attribute instance are deleted from the log, while others are retained in the log; discarding, in which all values of an attribute instance during a particular time period are deleted from the log; and archiving, in which log records for a particular attribute instance are removed from the log and stored in another location, such as on a back-up storage device. Those skilled in the art will appreciate that the facility may be straightforwardly adapted to support additional techniques of a similar nature.

The facility preferably makes decisions regarding when and to which attribute instances to apply maintenance techniques based on a variety of factors, including the relative importance level specified for various attribute instances, as well as other indications of the need to retain the logged information, such as an indication that logging information for a particular attribute instance has become available from another source, such as a database accessible via the Internet.

In step **804**, if additional logging configuration records remain, then the facility continues in step **802** to process the next logging configuration record. In step **805**, the facility continues in step **801** to process the next context log maintenance cycle.

FIG. **9** is a flow diagram showing the steps preferably performed by the facility to analyze log records for attribute instances. In step **901**, the facility receives an analysis specification specifying an attribute instance, including the attribute name of the attribute instance and the context server from which the attribute instance is obtained, the time period in which to analyze the logged attribute instance, and an analysis technique. Such a specification may be received from the user via the user interface, or from an application or other program whose functionality includes logged attribute analysis.

Examples of analysis techniques preferably supported by the facility include the following: summarization, discussed above; combination, in which values of several different attribute instances from the same time period are combined; generating a new value of the context attribute that is made available via the characterization module; retrospective application of rules, in which a rule designed to be applied to real-time values of an attribute is applied to logged values of that attribute; and pattern analysis, where recurring patterns are identified in the logged attribute values, or where a pattern is identified in the logged attribute data that matches a pattern specified outside the logged attribute data—for example, matching a series of logged electrocardiogram attribute values to an external electrocardiogram model indicating a high likelihood of heart disease; and ongoing analysis, wherein interim results produced during earlier analysis are retrieved, employed in current processing, augmented, and stored, in some cases separately from the log. Those skilled in the art will appreciate that the facility may be straightforwardly adapted to support additional techniques of a similar nature.

In step **902**, the facility applies the specified analysis technique to logged values of the specified attribute instance having effective times during the specified period. After step **902**, the facility continues in **901** to receive the next analysis specification.

FIG. **10** is a flow diagram showing the steps preferably performed by the facility in order to conduct a context simulation. In step **1001**, the facility receives a simulation specification specifying one or more attribute instances, a time period, and a speed for a new simulation. Such a specification may be received from the user via the user interface, or from an application or other program whose functionality includes logged attribute analysis. In simulation step **1002**, the facility performs the simulation by causing the characterization module to, when it receives a request for one of the specified attribute instances, return a logged value for the attribute instance rather than returning a value for the attribute instance generated in real-time by the corresponding context server. (The characterization module preferably continues to respond to attribute instance requests for other attribute instances with a value for the attribute instance generated in real-time by the corresponding context server. The facility is preferably configurable, however, to disable provision of real-time values for some or all of the other attribute instances.) As the simulation advances in time, the logged times of the logged values that are returned are also advanced in accordance with the specified simulation speed. Simulations may preferably be used for compliance testing or other testing, to repeat an experience, or for other purposes. In one preferred embodiment, scheduled logging is suspended during performance of the simulation in step **1002**. After step **1002**, the facility continues in step **1001** to receive the next simulation specification.

FIG. **11** is a data flow diagram showing the operation of the facility without a characterization module. It can be seen in FIG. **11** that context servers **1110**, **1120**, and **1130** provide attributes directly to context clients **1130**, **1140**, and **1150**. For example, it can be seen that context server **1120** provides a user elevation attribute **1122** directly to context client **1150**. In this embodiment, the context client may itself cache attribute values recently obtained from a context server. Further, in this embodiment, context clients may themselves interrogate context servers for an enumeration of their attributes, and mediate between attribute instances provided by different context servers. For example, context client **1140** may mediate between the instance **1111** of the user.location attribute provided by context server **1110** and the instance **1121** of the user.location attribute provided by context server **1120**.

In this embodiment, the facility preferably uses a logging context client **1160** to obtain attribute instance values from a context server and store them in a logging database **1161**. For example, the diagram shows that the logging context client obtains values of the instance of the user.location attribute supplied by the gps context server and the instance of the in_region attribute supplied by the region analysis context server and stores them in the logging database.

It will be understood by those skilled in the art that the above-described facility could be adapted or extended in various ways. For example, the facility may be implemented in computing devices other than wearable computers, including other types of mobile computing devices, such as personal digital assistants. The facility may further be implemented on various types of stationary and/or distributed computing devices, as well as non-traditional computing devices, such as smart appliances. Further, the facility may use attribute instance tables, logging configuration tables, and attribute log tables of various forms other than those shown above or may maintain its state in ways that do not involve the use of such tables. The facility may also utilize various additional pre-logging processing, log maintenance, and log analysis techniques beyond those described above. In addition to the information discussed above, additional information may be included in a log record, including the values of other

attributes. Log records may preferably be ordered and/or indexed based upon any, all, or of the information contained in them.

While the foregoing description makes reference to preferred embodiments, the scope of the invention is defined solely by the claims that follow and the elements recited therein.

We claim:

1. A method in a computing device for specifying context attributes for logging, comprising:

employing a processor executing computer-executable instructions stored on a computer-reasonable storage medium to implement the following acts:

displaying a list of context attributes available in the computing device, each context attribute in the list of context attributes having values supplied by one or more data sources;

caching the values supplied by the one or more data sources as the values are obtained from the data sources;

receiving a first set of user inputs identifying a subset of context attributes from the list of context attributes for logging;

receiving a second set of user inputs specifying a logging frequency for each context attribute in the identified subset of context attributes;

receiving a third set of user inputs specifying a maximum value age for each context attribute in the identified subset of context attributes;

selecting the identified subset of context attributes for logging;

for each context attribute in the identified subset of attributes:

determining an age of a cached value associated with the context attribute at periodic intervals determined by the logging frequency specified for the context attribute;

determining whether the age of the cached value associated with the context attribute is less than the maximum value age specified for the context attribute;

logging the cached value associated with the context attribute when it is determined that the age of the cached value associated with the context attribute is less than the maximum value age specified for the context attribute; and

obtaining a new value from a data source corresponding to the context attribute when it is determined that the age of the cached value associated with the context attribute is greater than the maximum value age specified for the context attribute;

for each context attribute of the identified subset of selected context attributes, receiving user input identifying a log in which values of the context attribute are to be logged; and

for each context attribute of the identified subset of context attributes, at periodic times as a function of the logging frequency associated with the context attribute, storing values of the selected context attribute in the log identified for the context attribute.

2. The method of claim **1** wherein a proper subset of the displayed available context attributes is selected.

3. The method of claim **1** wherein a single displayed available context attribute is selected.

4. The method of claim **1** wherein a value of a distinguished one of the selected context attributes is available from each of a plurality of sources, the method further comprising employing a user-specified mediator to one of the sources from which to obtain the value of the distinguished context attribute that is to be logged.

5. The method of claim **4**, further comprising receiving user input specifying the source from which to obtain the value of the distinguished context attribute that is to be logged.

6. The method of claim **4**, further comprising identifying for a distinguished one of the selected context attributes an alternative source from which new attribute values for the distinguished one of the selected context attributes are likely to become available at a future time.

7. The method of claim **6** wherein the identified alternative source is specified by user input.

8. The method of claim **1**, further comprising determining for a distinguished one of the selected context attributes a processing technique to which the distinguished context attribute is to be subjected before logging.

9. The method of claim **8** wherein the determined processing technique is specified by user input.

10. The method of claim **1**, further comprising determining for a distinguished one of the selected context attributes a processing technique to which a logged value of the distinguished context attribute is to be subjected at a time subsequent to logging.

11. The method of claim **10** wherein the determined processing technique is specified by user input.

12. The method of claim **1** wherein the displayed list of available context attributes contains context attributes relating to travel.

13. The method of claim **1** wherein the computing device in which the method is performed is a mobile computer system.

14. The method of claim **1** wherein the computing device in which the method is performed is a body-supported computer system.

15. The method of claim **1** wherein the computing device in which the method is performed follows the user to remain in the user's presence.

16. A system for logging context data items, the system comprising:

at least one computing device for:

displaying a set of available context data items;

caching values for the available context data items obtained from respective data sources;

receiving user input identifying a subset of the available context data items to be logged;

receiving user input defining a logging frequency for each context data item in the subset of available context data items;

receiving user input defining a maximum age value for each data item in the subset of available context data items;

periodically logging a cached value for each context data item in accordance with the respectively defined logging frequencies, wherein logging the cached value comprises:

determining an age of the cached value for the context data item to be logged;

determining whether the age of the cached value exceeds the maximum value age defined for the context data item;

logging the cached value for the context data item when it is determined that the age of the cached value does not exceed the maximum value age defined for the context data item; and

obtaining a new value for the data item from a data source when it is determined that the age of the

cached value exceeds the maximum value age defined for the context data item; and

determining whether to retain or discard a logged value of a distinguished one of the context data items in the subset of available data items based on a determined importance level reflecting the importance of retaining the logged value of the distinguished one of the subset of available context data items,

wherein the determined importance level is specified by user input.

17. The system of claim **16**, wherein the at least one computing device comprises:

a selection module that specifies how values for context data items of the available context data items associated with a computer user are to be logged within a context attribute logging configuration data structure, the selection module allowing a user to associate a logging frequency and a maximum value age for each context data item;

a logging module containing a plurality of entries each corresponding to a logged context attribute value data item and logged in accordance with the data structure; and

a characterization module that caches received values for each of the context data item and logs the cached values for each context data item at periodic times as a function of the logging frequency associated with the context data item, wherein a cached value having an age that exceeds the maximum value age associated with its respective context data item is replaced with a newly obtained value from a source of the value prior to logging.

18. The system of claim **17** wherein each entry of the data structure is a record.

19. The system of claim **17** wherein one or more selected entries of the data structure corresponding to a context data item for which values are available from more than one source further specifies a particular source from which to obtain a value for the context data item to which it corresponds.

20. The system of claim **17** wherein each of one or more selected entries of the data structure specifies a processing technique to which a corresponding context data item is to be subjected before logging.

21. The system of claim **17** wherein each of one or more selected entries of the data structure specifies a processing technique to which a corresponding context data item is to be subjected at a time subsequent to logging.

22. The system of claim **17** wherein each of one or more selected entries of the data structure specifies an importance level reflecting an importance of retaining information produced by logging a corresponding context data item.

23. The system of claim **17** wherein each of one or more selected entries of the data structure specifies an alternative source from which a corresponding context data item may become available at a future time.

24. The system of claim **16**, wherein:

the system comprises at least one logging component, the logging component periodically logging the cached values, the cached values being logged in an instance of a data structure such that each entry contains at least information identifying a context data item, an effective time, and a value produced for the context data item having the effective time; and

each context data item is named following a plain-language, hierarchical, and taxonomic attribute nomenclature.

25. The system of claim **24** wherein each entry further specifies an uncertainty level characterizing the likely level of accuracy in the value of the entry.

26. The system of claim **24** wherein each entry further identifies the time at which the entry was stored.

27. The system of claim **24** wherein each entry further identifies the source of the value of the entry.

28. The system of claim **16**, wherein the at least one computing device comprises a plurality of wearable intelligent assistant computers.

29. A computer-readable storage medium whose contents cause a computing device to specify context data items for logging, by performing a method comprising:

displaying a set of available data items;

caching values for the available data items obtained from respective data sources;

receiving user input identifying a subset of the available data items to be logged;

receiving user input defining a logging frequency for each data item in the subset of available data items;

receiving user input defining a maximum age value for each data item in the subset of available data items;

periodically logging a cached value for each data item in accordance with the respectively defined logging frequencies, wherein logging the cached value comprises:

determining an age of the cached value for the data item to be logged;

determining whether the age of the cached value exceeds the maximum value age defined for the data item;

logging the cached value for the data item when it is determined that the age of the cached value does not exceed the maximum value age defined for the data item; and

obtaining a new value for the data item from a data source when it is determined that the age of the cached value exceeds the maximum value age defined for the data item; and

determining whether to retain or discard a logged value of a distinguished one of the data items in the subset of available data items based on a determined importance level reflecting the importance of retaining the logged value of the distinguished one of the data items in the subset of available data items,

wherein the determined importance level is specified by user input.

30. The method of claim **29** wherein the computing device in which the method is performed is a general-purpose mobile computer system.

31. The method of claim **29** wherein the computing device in which the method is performed is a general-purpose wearable computer system.

32. The method of claim **29** wherein the computing device in which the method is performed is a body-supported general-purpose computer system.

* * * * *